
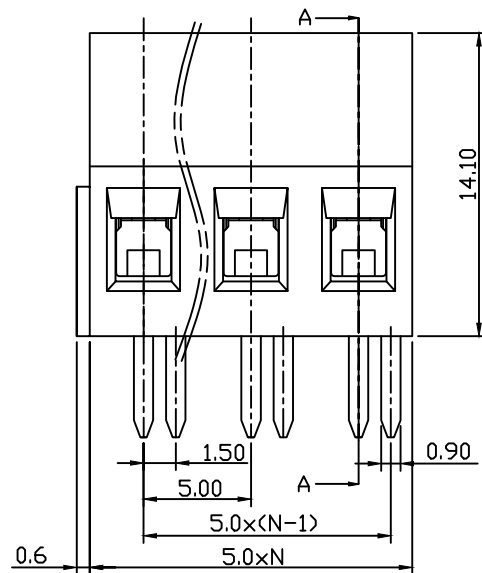


SECTION A-A

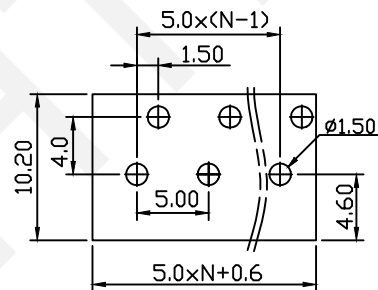

PCB Layout

Material
Housing:PA66,UL94V-0
Clamp:Brass Ni plated
Pin Header:Brass,Tin plated
Screw:M2.5,steel Zinc plated

Electrical
Rated voltage:300V
Rated current:16A
Contact Resistance:20 mΩ
Insulation resistance:500MΩ/DC500V
Withstand voltage:AC2000V/1min
Wire Range:22~12AWG 2.5mm²

Mechanical
Temp. Range:-40°C~+105°C
Strip length:6~7mm
Torque:0.4Nm (3.5Lb.in)

Order Information
RHTBY28D-5.00-XXP-4 S 00
Terminal Block
Pitch
No. of Pole
Color:4-Green
Screw: S-Slot Screw
Product Code: 00~99

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Screw CONN TERM Block 5.00mm

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTBY28D-5.00-XXP-4S


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4

5

6

7

8

9