

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---

A

B

C

D

E

F

G

A

B



C

D



E

F

G

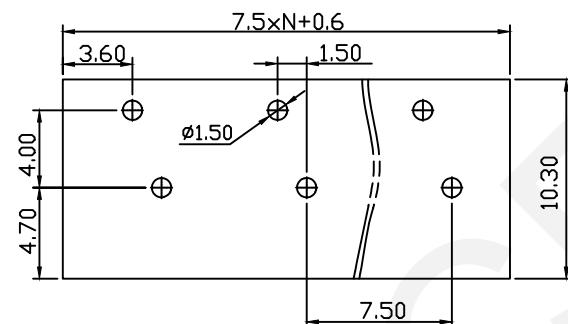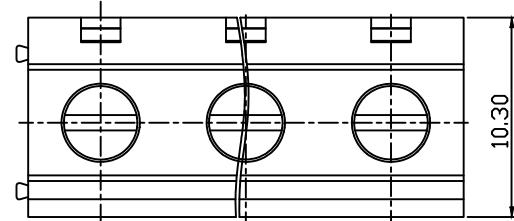

PCB Layout

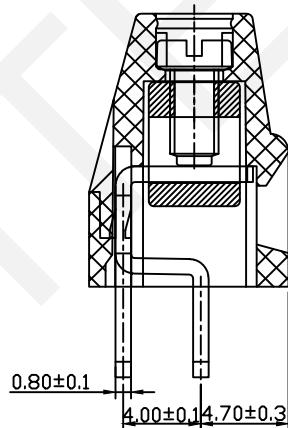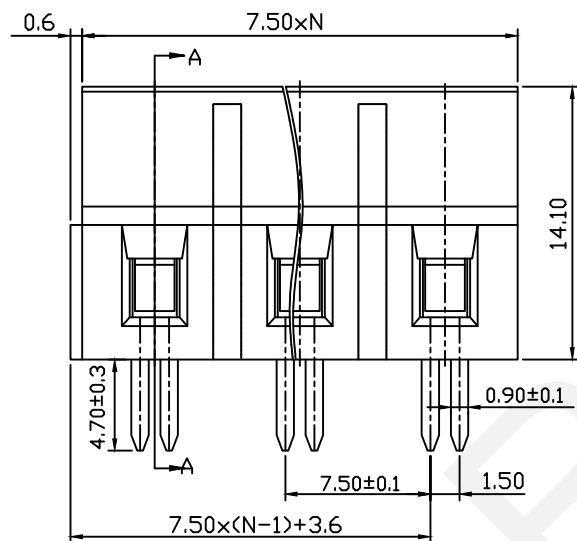

SECTION A-A

Material

Housing:PA66,UL94V-0
Clamp:Brass Ni plated
Pin Header:Brass,Tin plated
Screw:M2.5,steel Zinc plated

Electrical

Rated voltage:300V
Rated current:16A
Contact Resistance:20 mΩ
Insulation resistance:500MΩ/DC500V
Withstand voltage:AC2000V/1min
Wire Range:22~12AWG 2.5mm²

Mechanical

Temp. Range:-40°C~+105°C
Strip length:6~7mm
Torque:0.4Nm (3.5Lb.in)

Order Information

RHTBY28D-7.50-XXP-4 S 00

- Terminal Block
- Pitch
- No.of Pole
- Color:4-Green
- Screw: S-Slot Screw
- Product Code: 00~99



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Screw CONN TERM Block 7.50mm

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTBY28D-7.50-XXP-4S

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---