
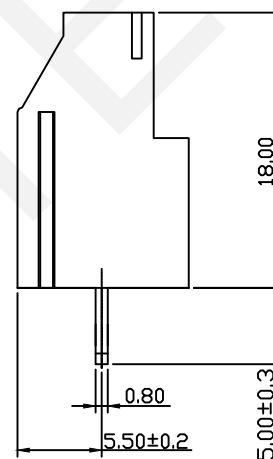


Recommended PCB Layout

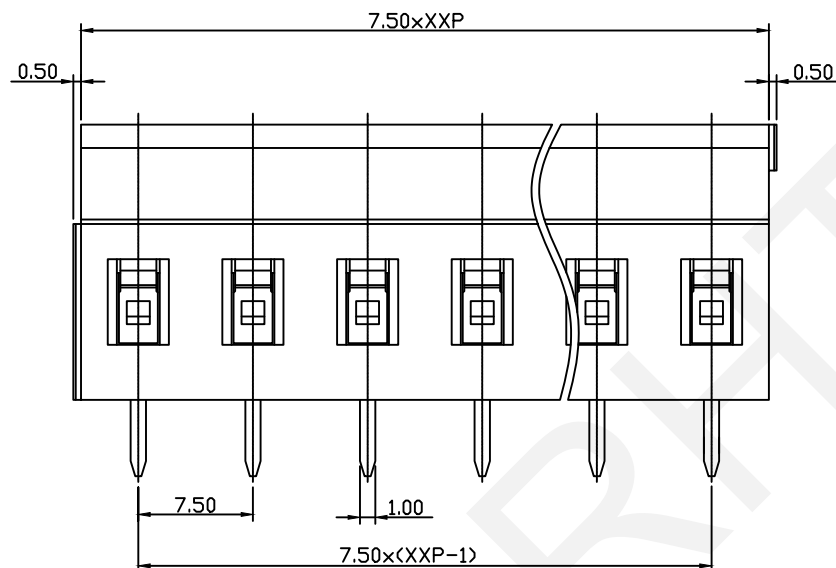

Material and other:
Housing: PA66, UL94V-0
Pin header: Copper Alloy, Sn Plated
Screw/Torque: M3.0/0.5N.m Max
Strip Length: 6~7mm
Operating Temperature: -40°C~+105°C
Soldering Temperature: 260°C/5S

Order Information

RHTBY30-7.50-XXP-X X

Terminal Block

Pitch: 7.50mm

No. of (02~24) Pole


Color: 1=Gray 2=Blue 3=Black

4=Green 5=Orange 6=Red

7=Transp 8=Yellow 9=White

Screw: SC=Slot/Cross

S-Slot Screw C-Cross Screw



Electrical Characteristics	UL	IEC
Rated Voltage	300V	450V
Rated Current	20A	24A
Withstand Voltage	1600V/1min	6.0KV
Wire Range	26-12 AWG	0.5~2.5 mm ²

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Pitch 7.50mm Terminal Blocks

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTBY30-7.50-XXP-XX

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4

5

6

7

8

9

