
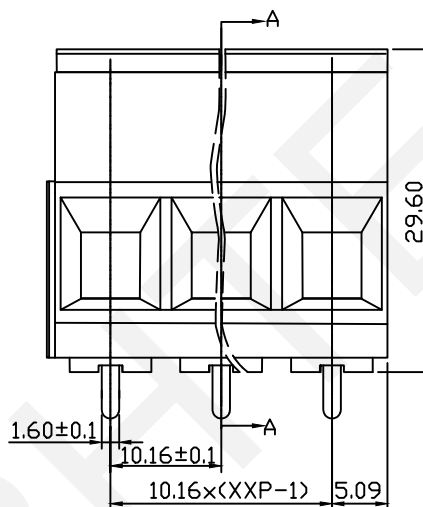
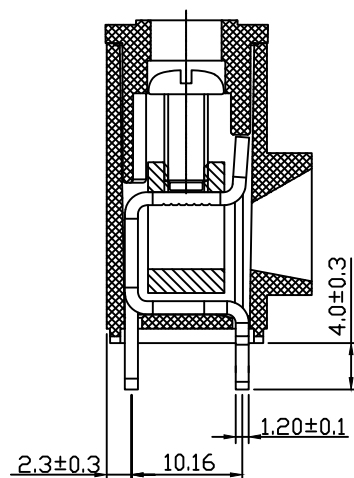
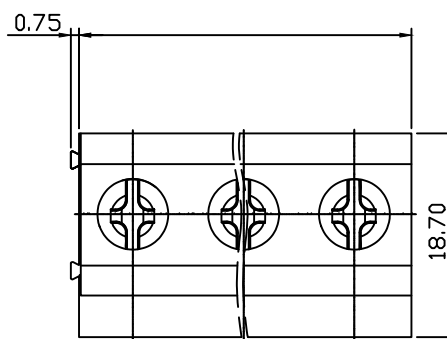


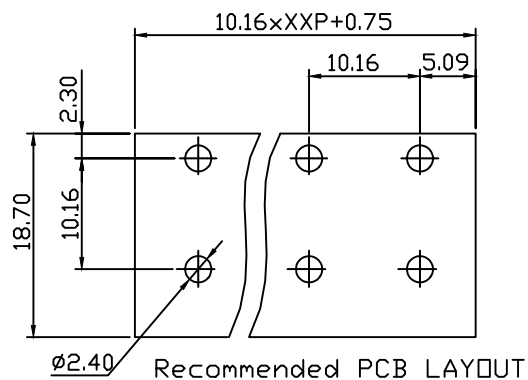


Material and other:
Housing:PA66,UL94V-0
Pin Header:Brass, Tin plated
Cage :Brass,Ni Plated Steip Length:10mm
Screw/Torque:Steel,M4.0,Zn Plated//1.2N.m Max.
Temp.Range:-40°C~+105°C,MAX Soldering:+250°C,for 5 Sec
Contact resistance:20mΩ MAX
Insulation resistance:500MΩ/DC500V

Order Information

RHTBY48-10.16-XXP-X X

Terminal Block
Pitch:10.16mm
No.of(02~24)Pins
Color:1=Gray 2=Blue 3=Black
4=Green 5=Orange 6=Red
7=Transp 8=Yellow 9=White
Screw:SC=Slot/Cross
S-Slot Screw C-Cross Screw

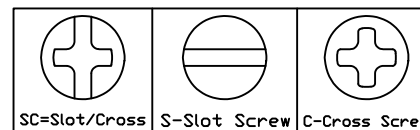

Electrical Characteristics	UL	IEC
Rated Voltage	300V	750V
Rated Current	52A	57A
Withstand Voltage	AC2000V/1min	---
Wire Range	6-20AWG	10 mm ²

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---
0~3	3~18	18~50
50~120		
±0.12	±0.15	±0.3
		±0.5

DRWN BY PAN

CHK'D BY FENG

APPR BY ZHAN

Pitch 12.7mm Screw
fixtion Terminal Block

THIRD ANGLE PROJECTION



RHTBY48-10.16-XXP-XX