

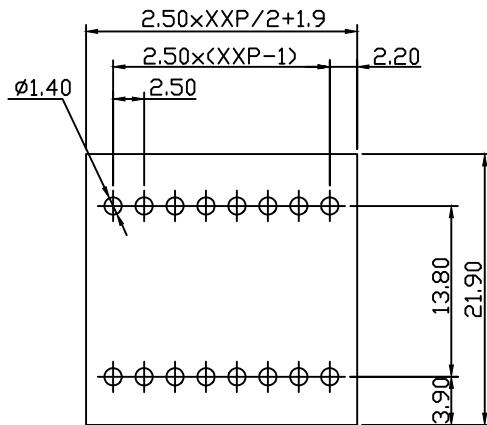





1 2 3 4 5 6 7 8 9

A



2P View

Recommended PCB Layout

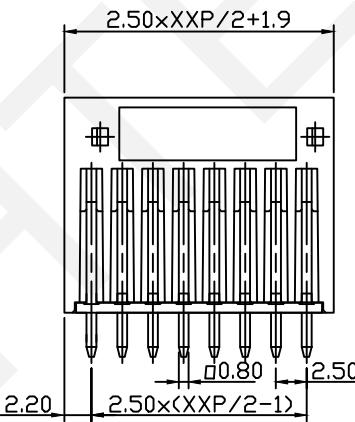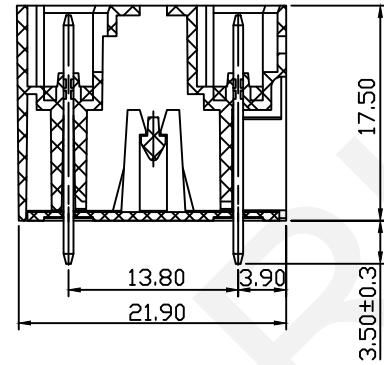

Material

Housing: PA66.UL94V-0

Pin Header: Copper Alloy, Sn Plated

Contact Resistance: 20 mΩ

Insulation resistance: 500MΩ/DC500V

Temp. Range: -40 °C ~ +105 °C

Soldering: +250°C For 5 Sec Max

Order Information

RHTBYDAV-2.50-XXP-X

Terminal Block

Pitch: 2.50mm

No. of (04~48) Pin

Color: 1=Gray 2=Blue

3=Black 4=Green 5=Orange

6=Red 7=Transp 8=Yellow 9=White

| Electrical Characteristics | UL | IEC |
|----------------------------|--------------|------|
| Rated Voltage | 150V | 250V |
| Rated Current | 5A | 5A |
| Withstand Voltage | AC2000V/1min | --- |



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

Sheet Size: A4

Scale:---

DRWN BY PAN

Pitch 2.50mm Terminal Block

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTBYDAV-2.50-XXP-X

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

G