





		1	2	3	4	5	6	7	8	9		
									UL/CUL Technical Data			
A												A
B												B
C												C
D												D
E												E
F												F
G												G

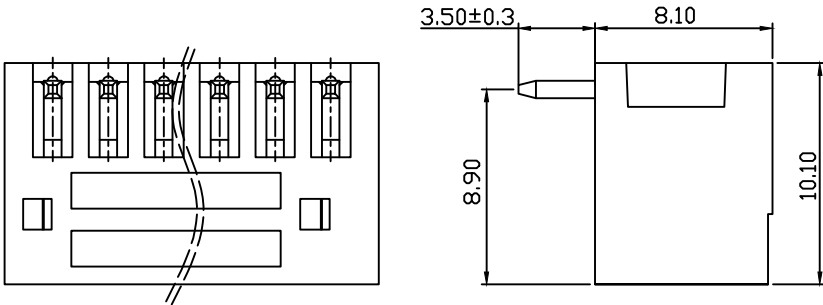

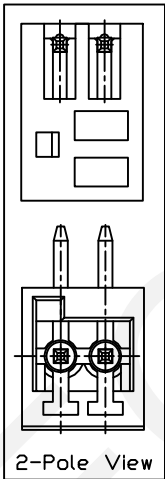

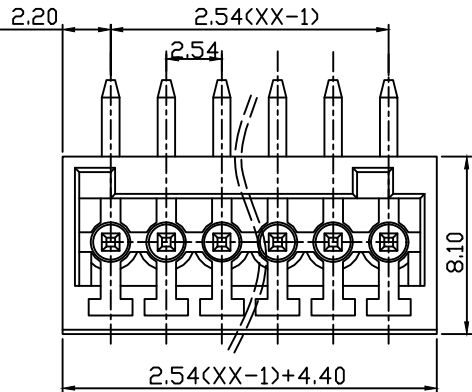

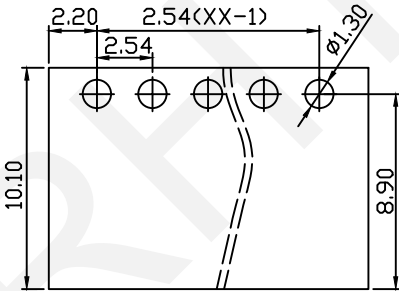

P.C.B. LAYOUT

Use Group	B	C	D
Rated Voltage [V]	150	-	-
Rated Current [A]	5	-	-
Wire Range	-		
Solid/Stranded[AWG]	-		
Withstanding Voltage	1300V/1Min		
IEC Technical Data			
Overvoltage Category	III	III	II
Contamination Class	3	2	2
Rated Voltage [V]	80	160	320
Rated Current [A]	5	5	5
Impulse Withstand Voltage [KV]	1.5	2.5	2.5
Conductor Cross Section	-		
Solid/Flexible [mm²]	-		
Material			
Insulation Material	PA66		
Flammability	UL94V-0		
Conductor Material	Copper Alloy		
Conductor Plating	Sn Plated		
Other Data			
Pitch/Poles [mm]/[P]	2.54/02~24		
Stripping Length[mm]	-		
Screw/ Torque(Max)[N.m]	-		
Operating Temperature [°C]	-40~105		
Soldering Temperature	260℃/5S		
Pin Dimensions [mm]	0.8*0.8		
PCB Hole Diameter [mm]	ø1.3		



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15

±0.3


±0.5

APPR BY ZHAN

TERMINAL BLOCK 2.54MM PITCH FEMALE PLUGGABLE






TERMINAL BLOCK RIGHT ANGLE PIN ROHS

THIRD ANGLE PROJECTION



RHTBYDR-2.54

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---

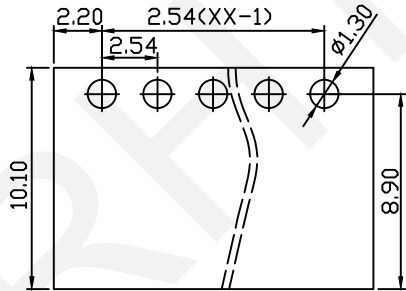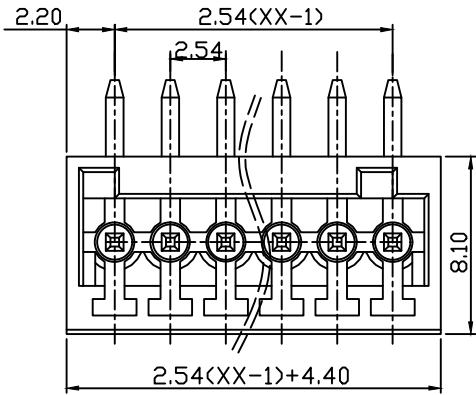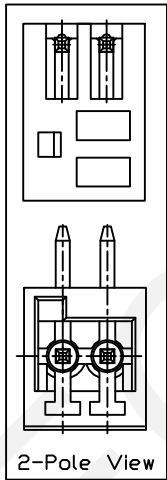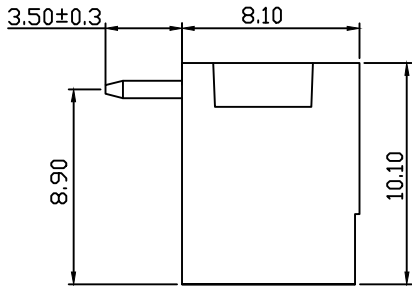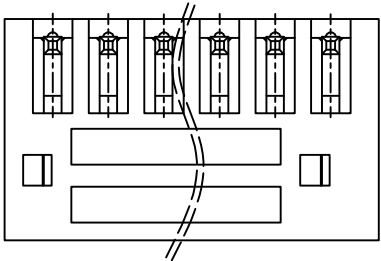

P.C.B. LAYOUT

Use Group	B	C	D
Rated Voltage [V]	150	-	-
Rated Current [A]	5	-	-
Wire Range	-		
Solid/Stranded[AWG]	-		
Withstanding Voltage	1300V/1Min		
IEC Technical Data			
Overvoltage Category	III	III	II
Contamination Class	3	2	2
Rated Voltage [V]	80	160	320
Rated Current [A]	5	5	5
Impulse Withstand Voltage [KV]	1.5	2.5	2.5
Conductor Cross Section	-		
Solid/Flexible [mm ²]	-		
Material			
Insulation Material	PA66		
Flammability	UL94V-0		
Conductor Material	Copper Alloy		
Conductor Plating	Sn Plated		
Other Data			
Pitch/Poles [mm]/[P]	2.54/02~24		
Stripping Length[mm]	-		
Screw/ Torque(Max)[N.m]	-		
Operating Temperature [°C]	-40~105		
Soldering Temperature	260℃/5S		
Pin Dimensions [mm]	0.8*0.8		
PCB Hole Diameter [mm]	ø1.3		