


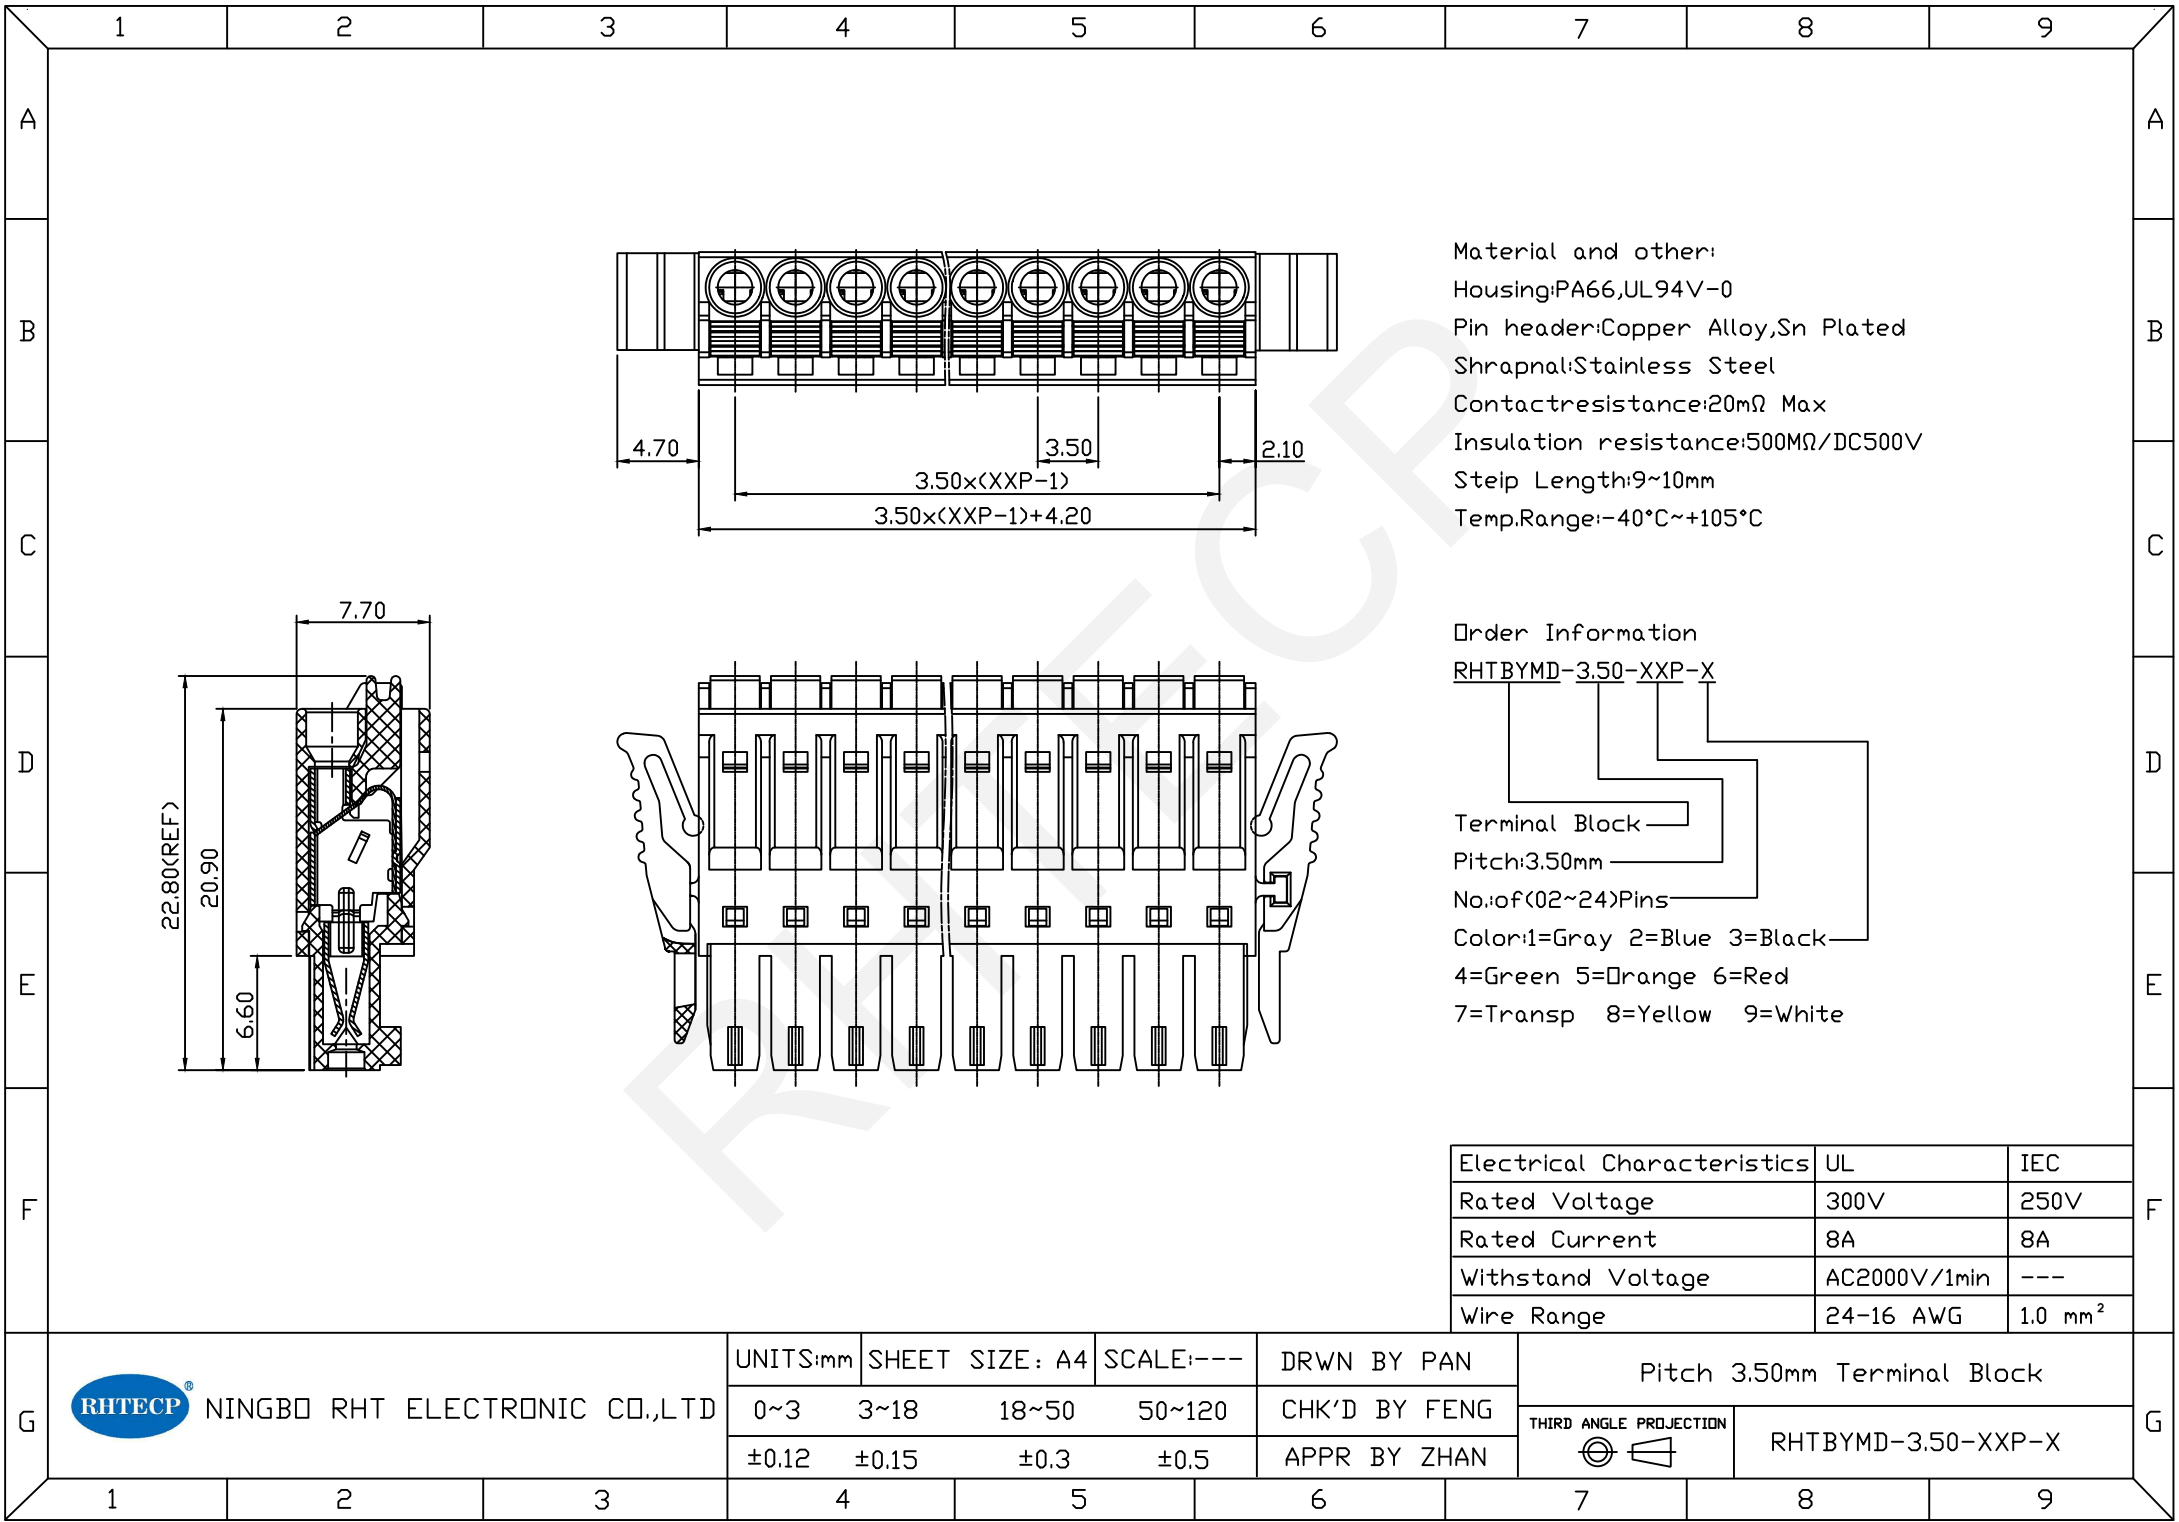
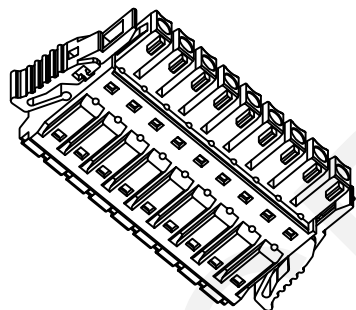


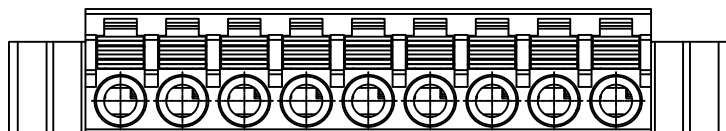

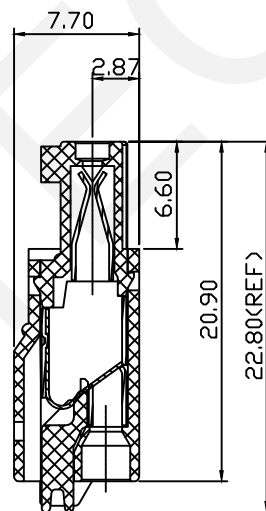

Material and other:
Housing:PA66,UL94V-0
Pin header:Copper Alloy,Sn Plated
Shrapnal:Stainless Steel
Contactresistance:20mΩ Max
Insulation resistance:500MΩ/DC500V
Steip Length:9~10mm
Temp.Range:-40°C~+105°C

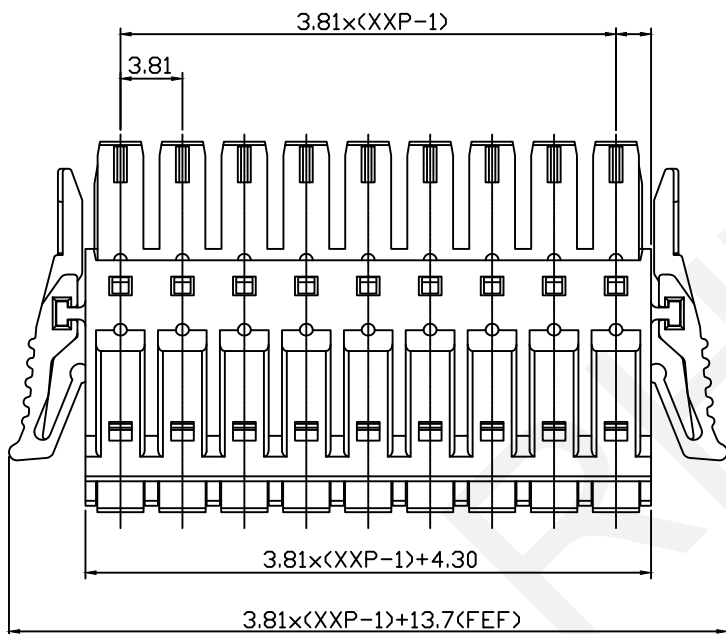

Order Information

RHTBYMD-3.50-XXP-X

Terminal Block —
Pitch:3.50mm —
No.of(02~24)Pins —
Color:1=Gray 2=Blue 3=Black —
4=Green 5=Orange 6=Red —
7=Transp 8=Yellow 9=White

Electrical Characteristics	UL	IEC
Rated Voltage	300V	250V
Rated Current	8A	7A
Withstand Voltage	AC2000V/1min	---
Wire Range	16-24 AWG	1.0 mm ²


RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

Pitch 3.81mm Pluggable Terminal Block,Plug

THIRD ANGLE PROJECTION



RHTBYMD-3.81-XXP-4