

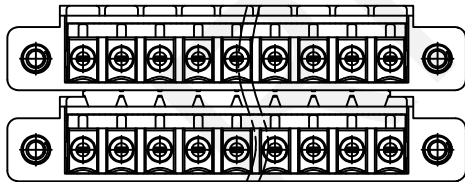
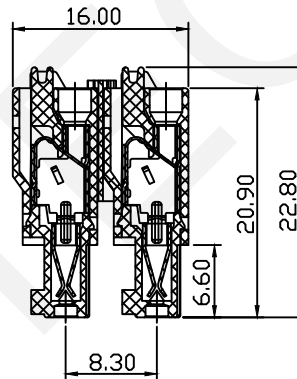
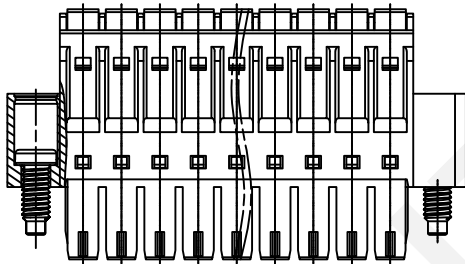

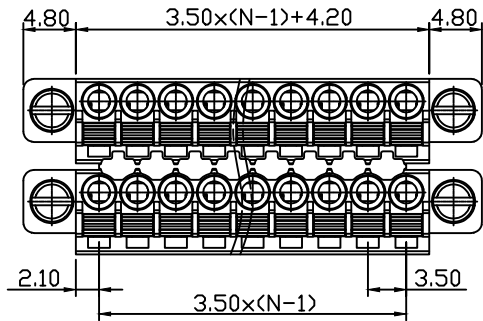


	1	2	3	4	5	6	7	8	9
A									
B									
C									
D									
E									
F									
G	 NINGBO RHT ELECTRONIC CO.,LTD			UNITS:mm 0~3    3~18    18~50    50~120 ±0.12   ±0.15    ±0.3    ±0.5	SHEET SIZE: A4 SCALE: ---	DRWN BY PAN CHK'D BY FENG APPR BY ZHAN	Plug-in TERM BLOCK 3.50MM THIRD ANGLE PROJECTION  RHTBYMEE-3.50-XXP-4S-00		
	1	2	3	4	5	6	7	8	9



#### Material

Housing:PA66, UL94V-0

Clamp:Phosphor bronze, Tin Plated

Shrapnel:Stainless steel

Screw:M3 Steel,Zn plated

Fix screw:Steel ,Zn plated

#### Electrical

Rated voltage:300V

Rated current: 8A

Wire range:24~16AWG 1.0mm<sup>2</sup>

Contact Resistance: 20 mΩ

Insulation resistance: 500MΩ/DC500V

Withstand voltage: AC2000V/1min

#### Mechanical

Temp.Range: -40℃~+105℃

Strip length: 9~10mm

#### Order Information

RHTBYMEE-3.50-XXP-4 S XX

Terminal Block —

Pitch —

No. of Pole —

Color:4-Green —

Screw: S-Slot Screw —

Product Code: 00~99 —