



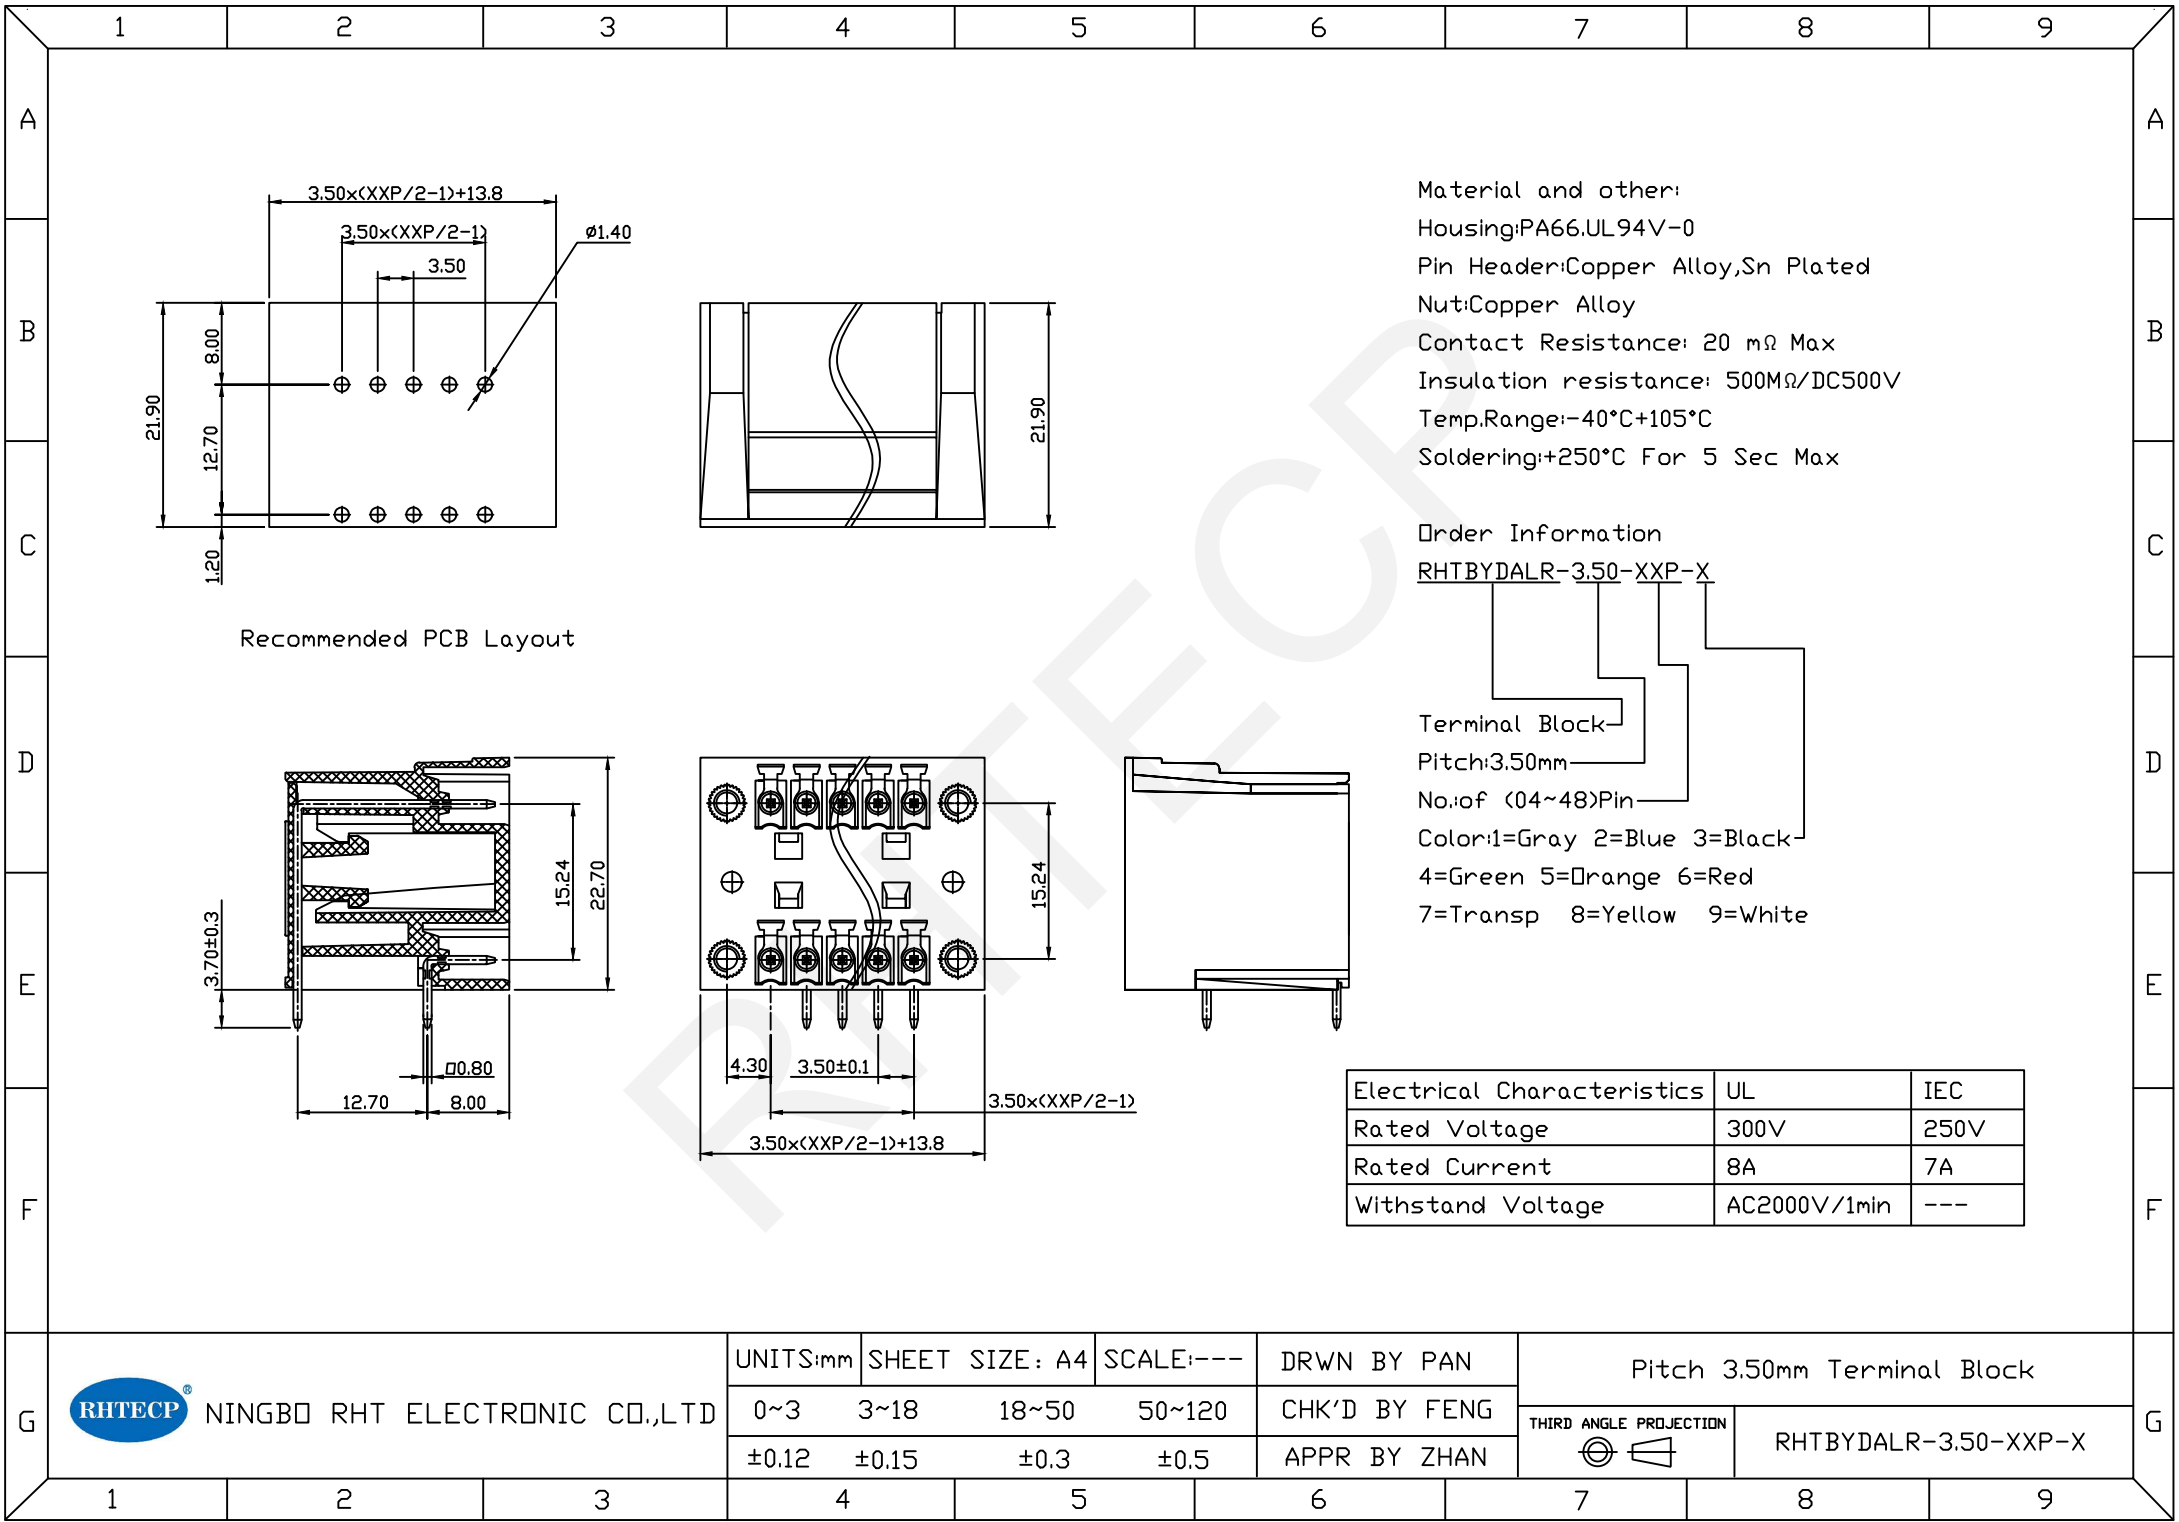


NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

Pitch 3.50mm Terminal Block	
THIRD ANGLE PROJECTION	RHTBYDALR-3.50-XXP-X

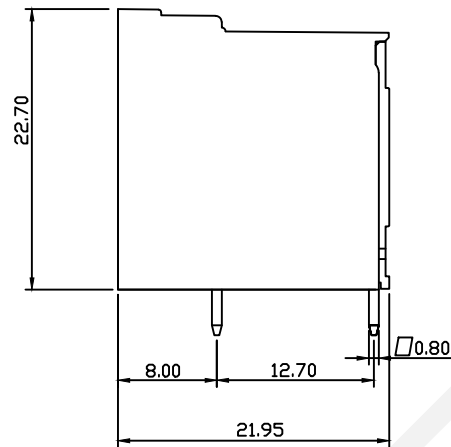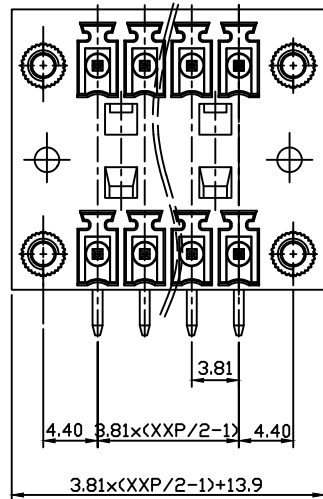

Material and other:
Housing:PA66,UL94V-0
Pin Header:Copper Alloy,Sn Plated
Operating temperature:-40°C+105°C
Soldering Temperature:+250°C For 5 S

Order Information

RHTBYDALR-3.81-XXP-X

Terminal Block



Pitch:3.81mm

No. of (04~48)Pin

Color:1=Gray 2=Blue 3=Black

4=Green 5=Orange 6=Red

7=Transp 8=Yellow 9=White

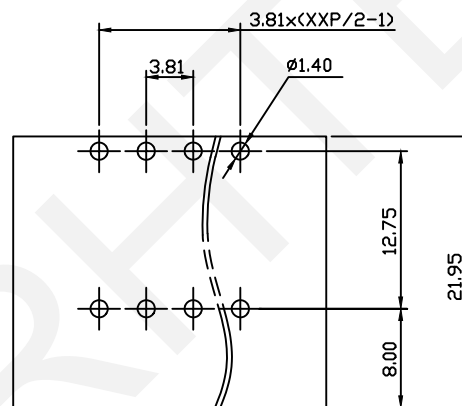

Recommended PCB Layout

Electrical Characteristics	UL	IEC
Rated Voltage	300V	160V
Rated Current	8A	7A
Withstand Voltage	1600V/1min	2.5KV

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

Pitch 3.81mm Terminal Block

THIRD ANGLE PROJECTION

RHTBYDALV-3.81-XXP-409