

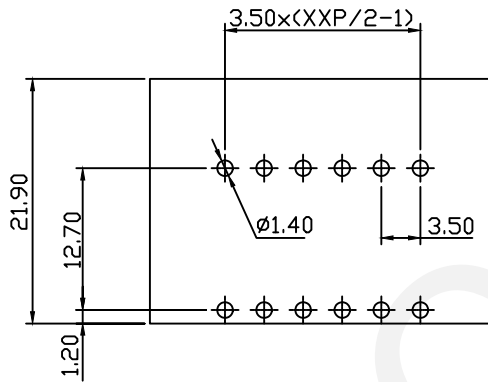

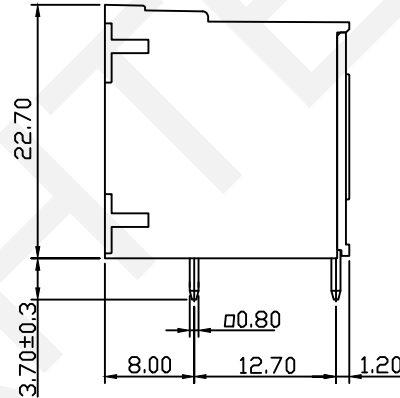


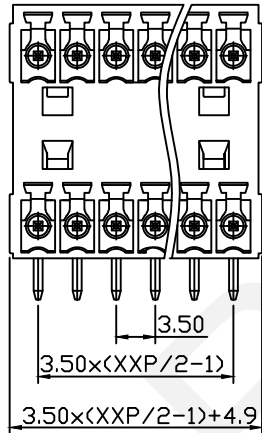

Recommended PCB Layout



Material

Housing:PA66,UL94V-0

Cover:PA66,UL94V-0

Short Pin: Copper Alloy,Sn Plated

Long Pin:Copper Alloy,Sn Plated

Operating temperature:-40°C+105°C

Soldering Temperature:+260°C For 5 Sec Max

Order Information

RHTBYDAR-3.50-XXP-X

Terminal Block

Pitch:3.50mm

No.of (04~48)Pin

Color:1=Gray 2=Blue

3=Black 4=Green 5=Orange

6=Red 7=Transp 8=Yellow 9=White

Electrical Characteristics	UL	IEC
Rated Voltage	300V	160V
Rated Current	8A	7A
Withstand Voltage	1600V/1min	2.5KV



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15


±0.3

±0.5





APPR BY ZHAN

Pitch 3.50mm Terminal Block

THIRD ANGLE PROJECTION



RHTBYDAR-3.50-XXP-X

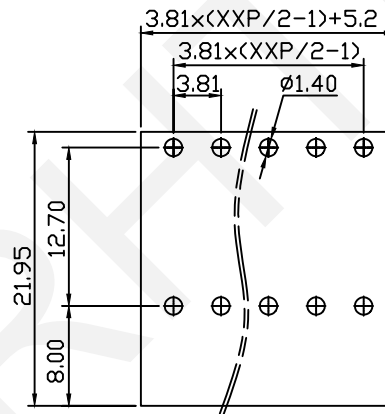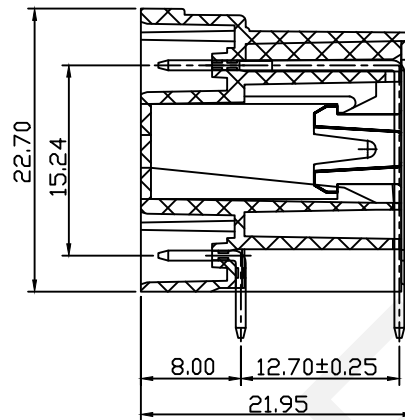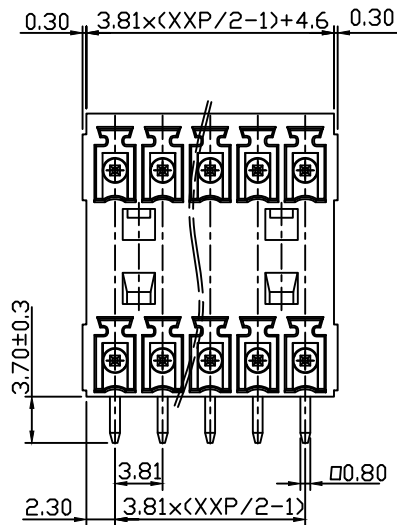

Recommended PCB Layout

Material

Housing:PA66,UL94V-0

Pin Header:Copper Alloy,Sn Plated

Temp.Range:-40°C~+105°C

Soldering:+250°C For 5 Sec Max

Order Information

RHTBYDAR-3.81-XXP-X

Terminal Block

Pitch:3.81mm

No.of (04~48)Pin

Color:1=Gray 2=Blue

3=Black 4=Green 5=Orange

6=Red 7=Transp 8=Yellow 9=White

Electrical Characteristics	UL	IEC
Rated Voltage	300V	160V
Rated Current	8A	7A
Withstand Voltage	A2000V/1min	---



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Pitch 3.81mm Terminal Block

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTBYDAR-3.81-XXP-X

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4

5

6

7

8

9