

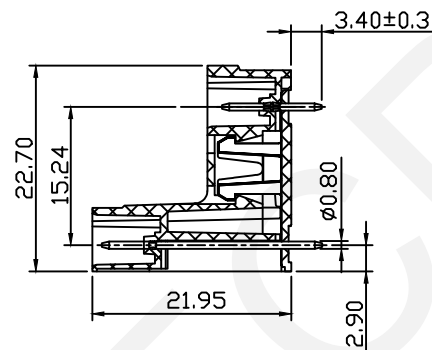

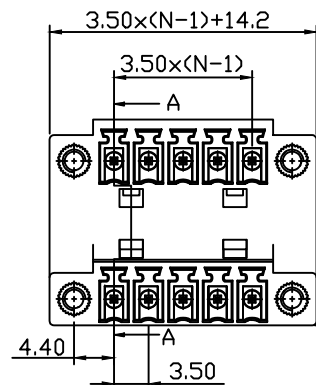


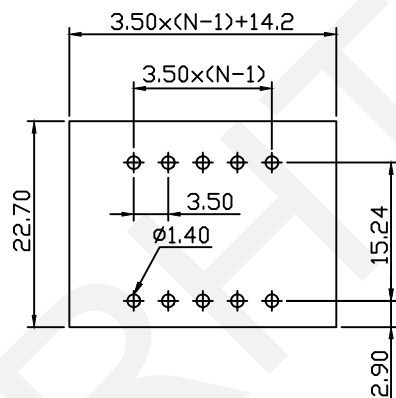

SECTION A-A



PCB LAYOUT

Material
Housing: PA66, UL94V-0
Clamp: Brass, Tin Plated
Nut: M2.5, Brass

Electrical
Rated voltage: 300V
Rated current: 8A
Contact Resistance: 20 mΩ
Insulation resistance: 500MΩ/DC500V
Withstand voltage: AC2000V/1min

Mechanical
Temp. Range: -40℃~+105℃

Order Information
RHTBYDBVM-3.50-XXP-4 S XX
Terminal Block
Pitch
No. of Pole
Color: 4-Green
Screw: S-Slot Screw
C-Cross Screw
Product Code: 00~99




NINGBO RHT ELECTRONIC CO., LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

Pluggable Terminal Block 3.5 MM

THIRD ANGLE PROJECTION



RHTBYDBVM-3.50-XXP-4S-00

