

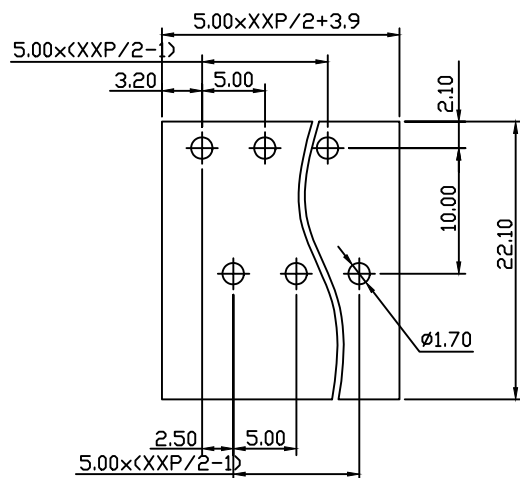
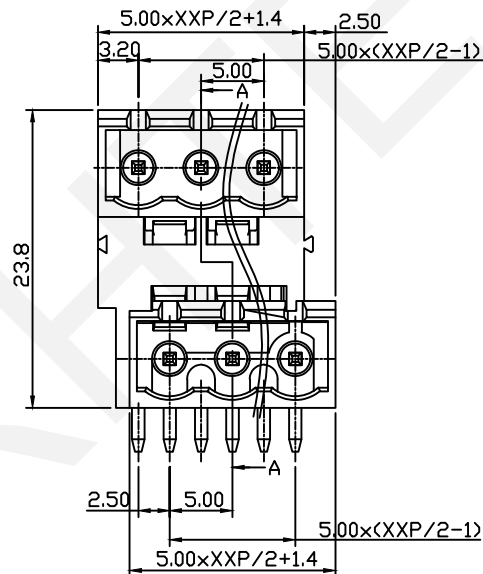




Recommended PCB Layout

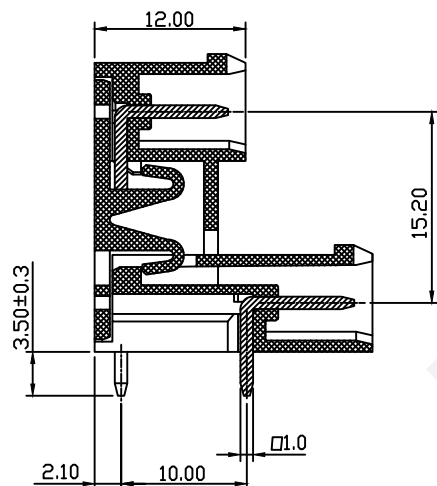

Material
Housing:PA66,UL94V-0
Pin Header:Brass,Tin Plated
Temp.Range: -40℃~+105℃
Soldering :+250℃ For 5 Sec Max

Order Information
RHTBYDCRC-5.00-XXP-X

Terminal Block
Pitch:5.00mm
No.of (04~06)Pin
Color:1=Gray 2=Blue
3=Black 4=Green 5=Orange
6=Red 7=Transp 8=Yellow 9=White

Electrical Characteristics	UL	IEC
Rated Voltage	300V	450V
Rated Current	15A	17.5A
Withstand Voltage	AC2000V/1min	---



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5


CHK'D BY FENG
APPR BY ZHAN

Pitch 5.00mm Terminal Block




THIRD ANGLE PROJECTION



RHTBYDCRC-5.00-XXP-X

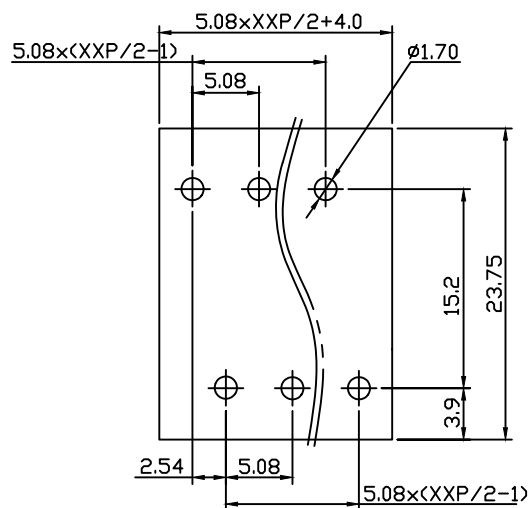

Recommended PCB Layout

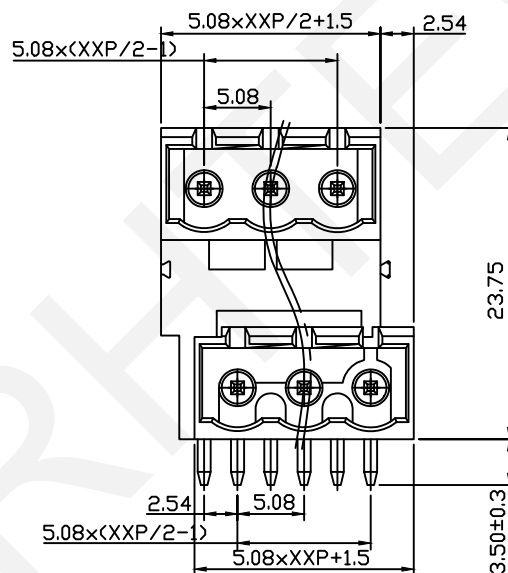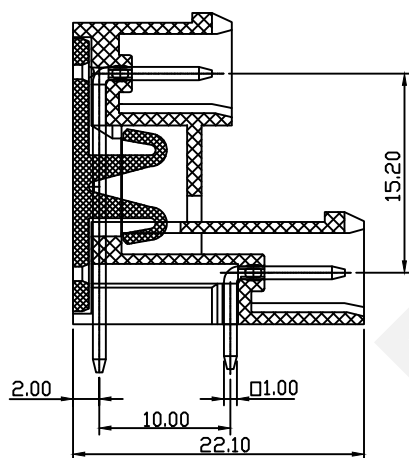

Material
Housing:PA66,UL94V-0
Pin Header:Brass,Tin Plated
Temp.Range: -40℃~+105℃
Soldering :+250℃ For 5 Sec Max

Order Information
RHTBYDCRC-5.08-XXP-X

Terminal Block
Pitch:5.08mm
No.of (04~06)Pin
Color:1=Gray 2=Blue
3=Black 4=Green 5=Orange
6=Red 7=Transp 8=Yellow 9=White

Electrical Characteristics	UL	IEC
Rated Voltage	300V	450V
Rated Current	15A	17.5A
Withstand Voltage	AC2000V/1min	---




NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

Pitch 5.08mm Terminal Block



RHTBYDCRC-5.08-XXP-X