

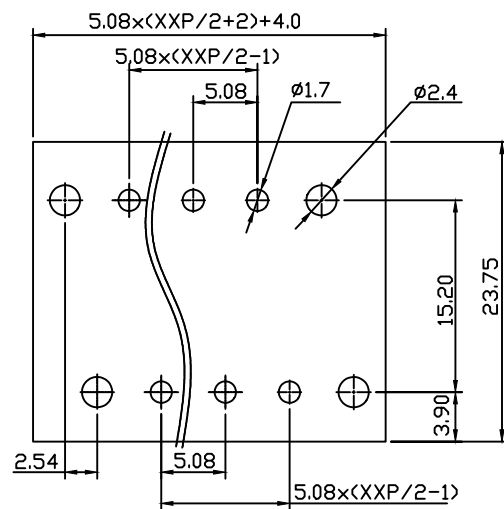
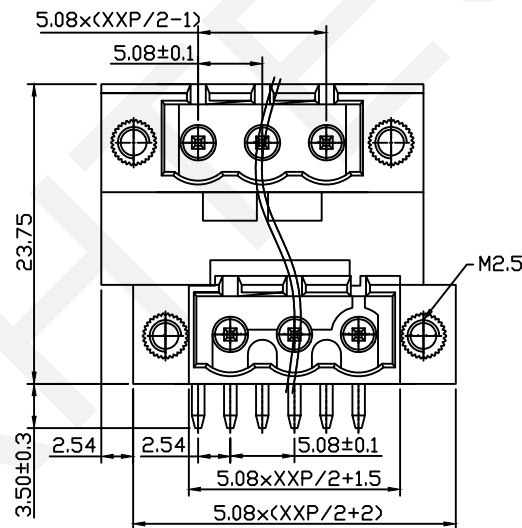


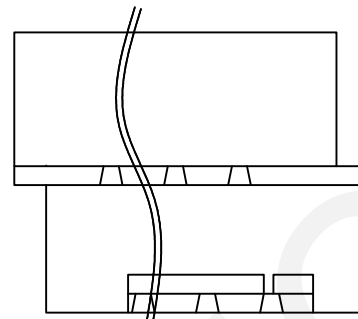

Recommended PCB Layout

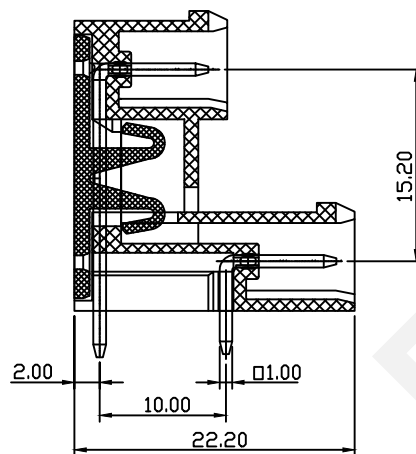

Material and other:  
Housing:PA66,UL94V-0  
Pin Header:Brass,Tin Plated  
Nut:Brass  
Temp.Range:-40°C~+105°C  
Soldering:+250°C For 5 Sec Max

Order Information  
RHTBYDCRM-5.08-XXP-4 09

Terminal Block  
Pitch:5.08mm  
No.:of(04~06)Pins  
Color:1=Gray 2=Blue 3=Black  
4=Green 5=Orange 6=Red  
7=Transp 8=Yellow 9=White  
Product Code:00~99

| Electrical Characteristics | UL           | IEC   |
|----------------------------|--------------|-------|
| Rated Voltage              | 300V         | 450V  |
| Rated Current              | 15A          | 17.5A |
| Withstand Voltage          | AC2000V/1min | ---   |




NINGBO RHT ELECTRONIC CO.,LTD

| UNITS:mm | SHEET SIZE: A4 | SCALE:--- | DRWN BY PAN |
|----------|----------------|-----------|-------------|
| 0~3      | 3~18           | 18~50     | 50~120      |
| ±0.12    | ±0.15          | ±0.3      | ±0.5        |

|               |
|---------------|
| CHK'D BY FENG |
| APPR BY ZHAN  |

Pitch 5.08mm Terminal Block



RHTBYDCRM-5.08-XXP-409