

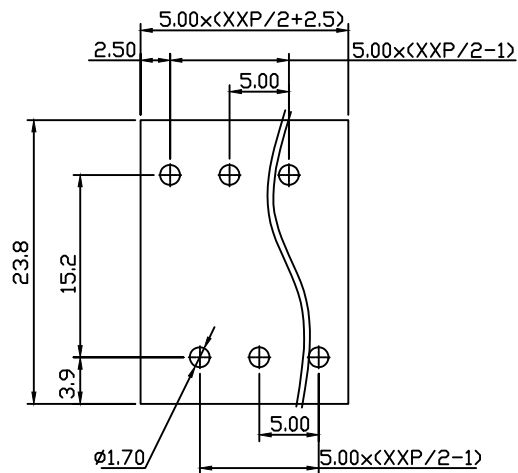
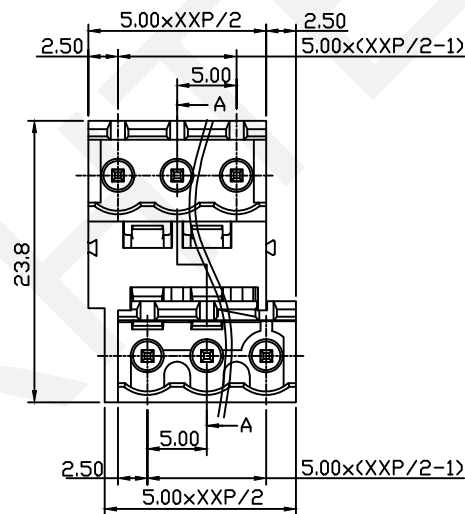




Recommended PCB Layout

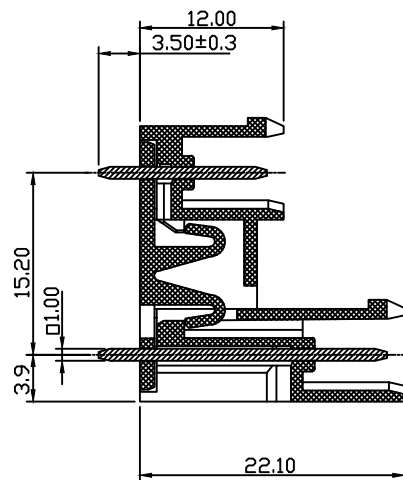

Material

Housing:PA66,UL94V-0

Pin Header:Copper Alloy,Tin Plated

Temp.Range: -40℃~+105℃

Soldering :+250℃ For 5 Sec Max

Order Information

RHTBYDCV-5.00-XXP-X

Terminal Block

Pitch:5.00mm

No. of (04~48)Pin

Color:1=Gray 2=Blue

3=Black 4=Green 5=Orange

6=Red 7=Transp 8=Yellow 9=White

Electrical Characteristics	UL	IEC
Rated Voltage	300V	450V
Rated Current	15A	17.5A
Withstand Voltage	AC2000V/1min	---



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Pitch 5.00mm Terminal Block

0~3


3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION



RHTBYDCV-5.00-XXP-X


±0.12

±0.15




±0.3

±0.5

APPR BY ZHAN

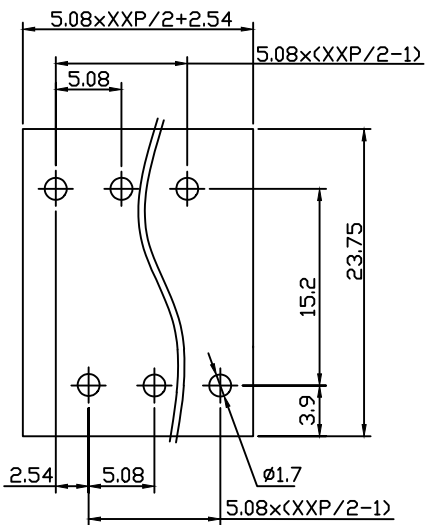

Recommended PCB Layout

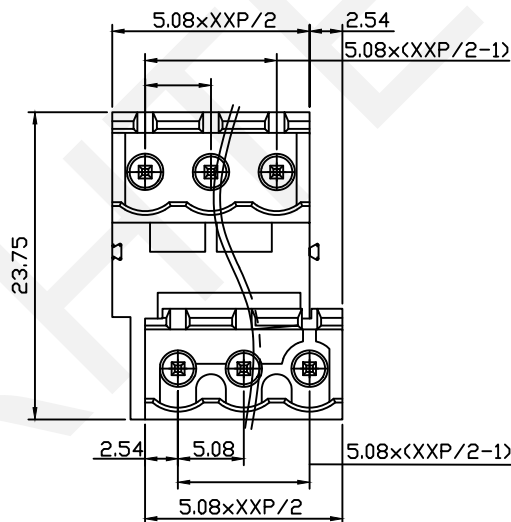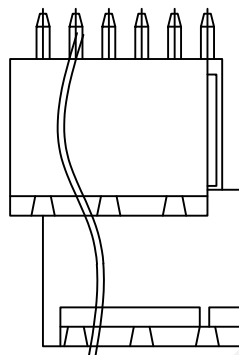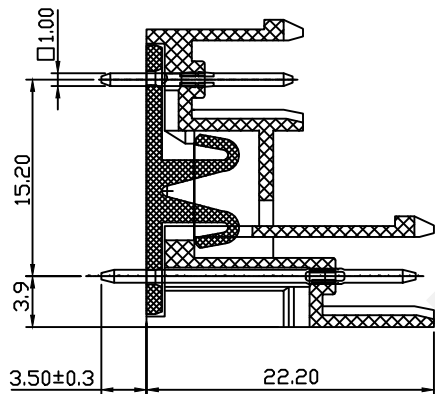

Material
Housing:PA66,UL94V-0
Pin Header:Brass,Tin Plated
Temp.Range: -40℃~+105℃
Soldering :+250℃ For 5 Sec Max

Order Information
RHTBYDCV-5.08-XXP-X

Terminal Block
Pitch:5.08mm
No.of (04~48)Pin
Color:1=Gray 2=Blue
3=Black 4=Green 5=Orange
6=Red 7=Transp 8=Yellow 9=White

Electrical Characteristics	UL	IEC
Rated Voltage	300V	450V
Rated Current	15A	17.5A
Withstand Voltage	AC2000V/1min	---



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

±0.12

±0.15

±0.3


±0.5

CHK'D BY FENG

APPR BY ZHAN

Pitch 5.08mm Terminal Block

THIRD ANGLE PROJECTION



RHTBYDCV-5.08-XXP-X