

1 2 3 4 5 6 7 8 9

A

B

C

D

E

F

G

A

B





C

D

E

F

G

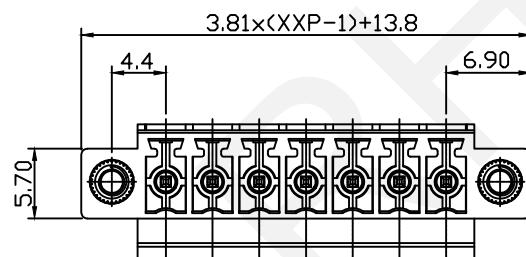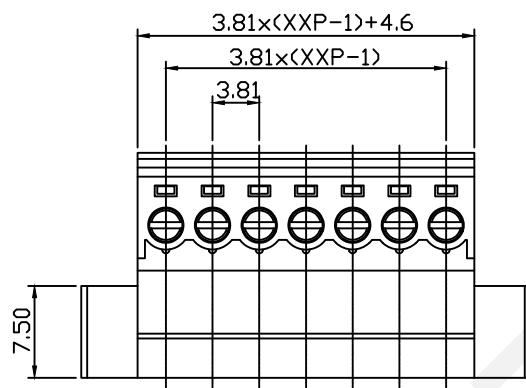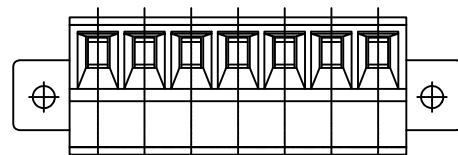

Material and other:

Housing:PA66,UL94V-0

Pin header:Copper Alloy,Sn Plated

Stripping Length:6~7mm

Screw/Torque:M2/0.2N.m

Operating Temperature:-40°C~+105°C

Order Information

RHTBYDGN-3.81-XXP-X X

Terminal Block

Pitch:3.81mm


No.of(02~24)Pins

Color:1=Gray 2=Blue 3=Black

4=Green 5=Orange 6=Red

7=Transp 8=Yellow 9=White

Screw:SC=Slot/Cross

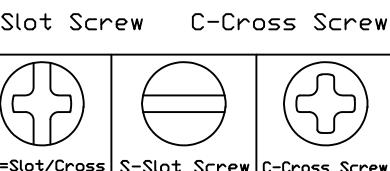

S-Slot Screw C-Cross Screw

| Electrical Characteristics | UL | IEC |
|----------------------------|-----------|-------------------------|
| Rated Voltage | 300V | 160V |
| Rated Current | 8A | 7A |
| Withstand Voltage | 1600/1min | 2.5KV |
| Wire Range | 28~16 AWG | 0.5~1.5 mm ² |



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN

Pitch 3.81mm Terminal Blocks



RHTBYDGN-3.81-XXP-XX

1

2

3

4

5

6

7

8

9