



1 2 3 4 5 6 7 8 9


A

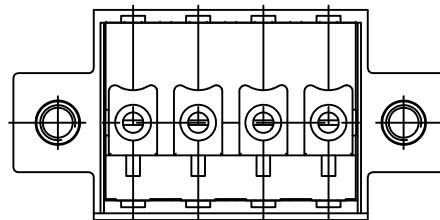


B

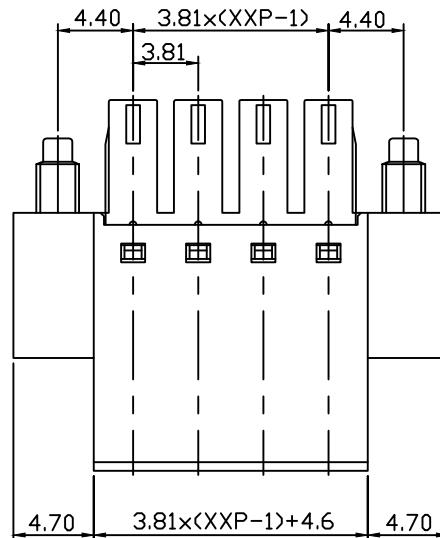

C

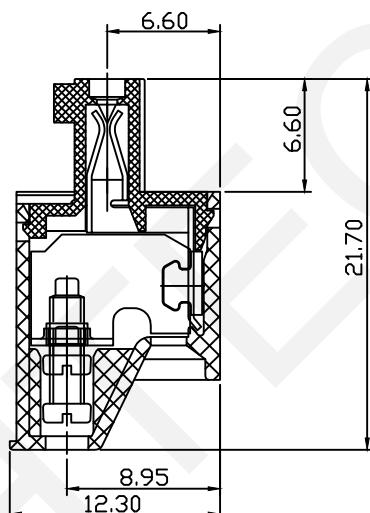

D

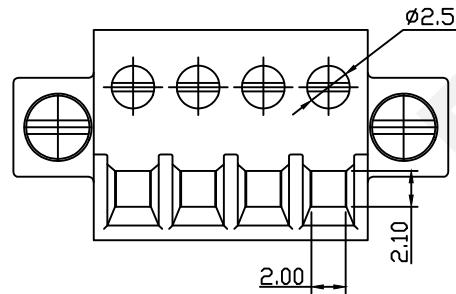

E

Electrical Characteristics	UL	IEC
Rated Voltage	300V	250V
Rated Current	8A	13.5A
Withstand Voltage	AC2000V/1min	---
Wire Range	28-16 AWG	1.0 mm ²

Material and other:

Housing:PA66,UL94V-0

Clamp:Phosphor Bronze,Ni Plated

Cage:Brass,Zn Plated

Screw/Torque:Steel,M2,Zn Plated/0.2N.m

Slide Block:Steel,Zn Plated

Contactresistance:20mΩ MAX

Insulation resistance:500MΩ/DC500V

Stripping Length: 7mm

Temp.Range:-40°C~+105°C

Order Information

RHTBYDKCM-3.81-XXP-X X

Terminal Block

Pitch:3.81mm

No.of(02~24)Pins

Color:1=Gray 2=Blue 3=Black

4=Green 5=Orange 6=Red

7=Transp 8=Yellow 9=White

Screw:SC=Slot/Cross

S-Slot Screw C-Cross Screw



SC=Slot/Cross S-Slot Screw C-Cross Screw



THIRD ANGLE PROJECTION

RHTBYDKCM-3.81-XXP-XX

RHTECP®

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

G