

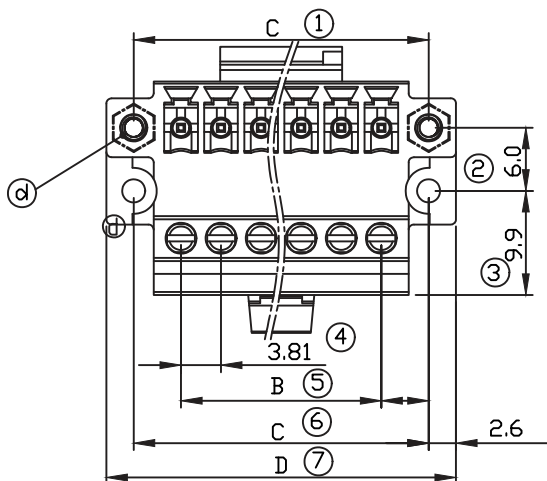


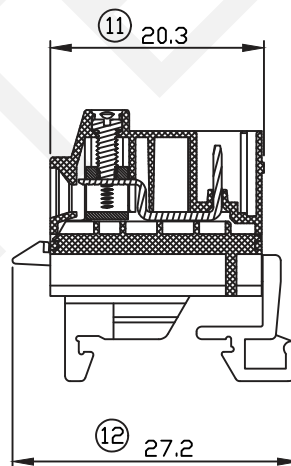

N=Number of Poles  
 Dim A=N×3.81+1.39  
 Dim B=(N-1)×3.81  
 Dim C=N×3.81+5.19  
 Dim D=N×3.81+10.39

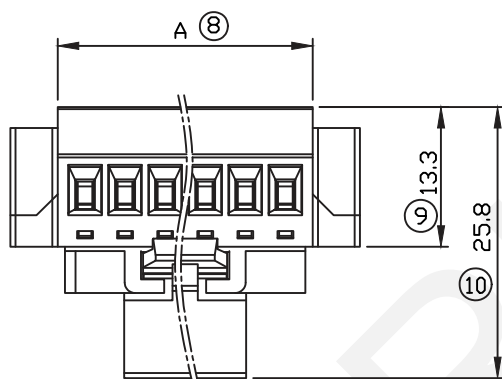

Electrical :  
 Rated voltage:300V  
 Rated current:8A  
 Contact resistance:20mΩ  
 Insulator Resistance:5000MΩ/1000V  
 Withstanding Voltage: AC2000V/1Min

Material:  
 Housing: PA66, UL94V-0  
 Pin header:Brass,Tin Plated

Mechanical  
 Temp. Range: -40°C~+105°C  
 MAX Soldering: +250°C for 5 Sec

#### ORDER INFORMATION

Product NO.: RHTBYDKFM-3.81-XX-X X X

Series No \_\_\_\_\_  
 Pitch: 3.81=3.81mm, \_\_\_\_\_  
 Number of Pole \_\_\_\_\_  
 Color: 1=Gray 2=Blue 3=Black  
 4=Green 5=Orange 6=Red  
 7=Transparent 8=Yellow 9=White  
 Screw: C=Cross Screw \_\_\_\_\_  
 S=Slot Screw \_\_\_\_\_  
 Customer Request \_\_\_\_\_



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Series Pitch=3.81mm

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTBYDKFM-3.81-XXP-XXX


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4

5

6

7

8

9