
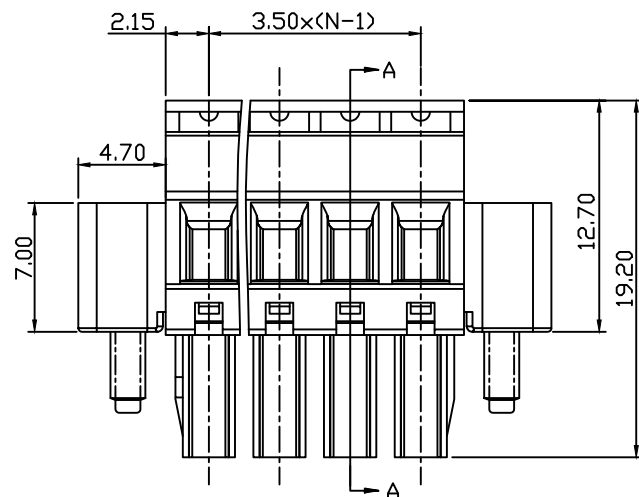


SECTION A-A

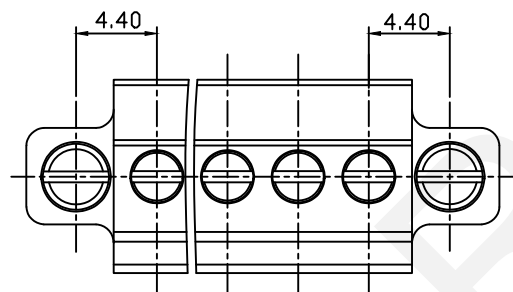

Material
Housing: PA66, UL94V-0
Clamp: Phosphor bronze, Ni Plated
Shrapnel: Stainless steel
Screw: M2 Steel, Zinc plated
Wire guard: Brass, Zn plated

Electrical
Rated voltage: 300V
Rated current: 8A
Wire range: 28~16AWG 1.5mm²
Contact Resistance: 20 mΩ
Insulation resistance: 500MΩ/DC500V
Withstand voltage: AC2000V/1min

Mechanical
Temp. Range: -40℃~+105℃
Strip length: 6~7mm
Torque: 0.2Nm (1.7 bin)

Order Information
RHTBYDNDM-3.50-XXP-4 S XX
Terminal Block
Pitch
No. of Pole
Color: 4-Green
Screw: S-Slot Screw
C-Cross Screw
Product Code: 00~99



NINGBO RHT ELECTRONIC CO., LTD

UNITS: mm

SHEET SIZE: A4

SCALE: ---

DRWN BY PAN

Pluggable Terminal Block 3.50 MM

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTBYDNDM-3.50-4S-00


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4



5

6


7

8

9

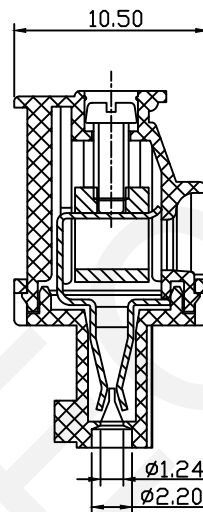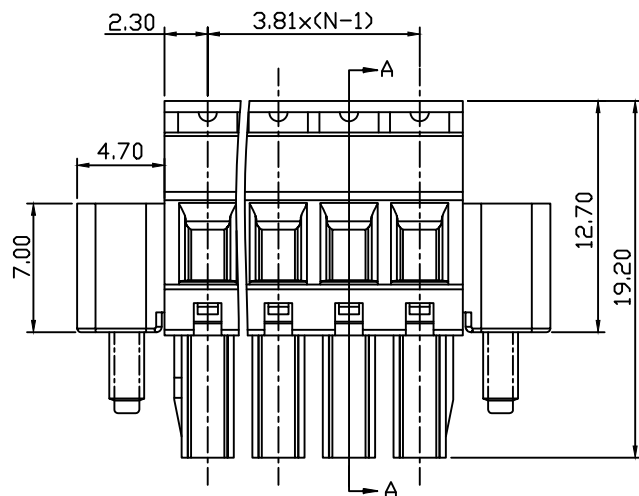

SECTION A-A

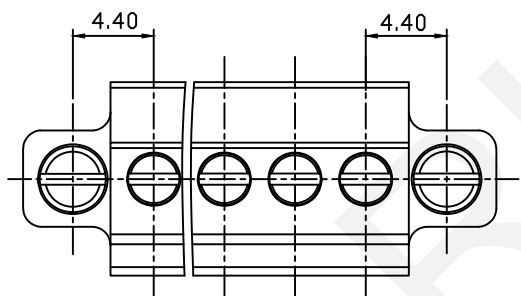

Material
Housing: PA66, UL94V-0
Clamp: Phosphor bronze, Ni Plated
Shrapnel: Stainless steel
Screw: M2 Steel, Zinc plated
Wire guard: Brass, Zn plated

Electrical
Rated voltage: 300V
Rated current: 8A
Wire range: 28~16AWG 1.5mm²
Contact Resistance: 20 mΩ
Insulation resistance: 500MΩ/DC500V
Withstand voltage: AC2000V/1min

Mechanical
Temp. Range: -40℃~+105℃
Strip length: 6~7mm
Torque: 0.2Nm (1.7 bin)

Order Information
RHTBYDNDM-3.81-XXP-4 S XX
Terminal Block
Pitch
No. of Pole
Color: 4-Green
Screw: S-Slot Screw
C-Cross Screw
Product Code: 00~99



NINGBO RHT ELECTRONIC CO., LTD

UNITS: mm

SHEET SIZE: A4

SCALE: ---

DRWN BY PAN

Pluggable Terminal Block 3.81 MM

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTBYDNDM-3.81-4S-00


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4

5

6

7

8

9