

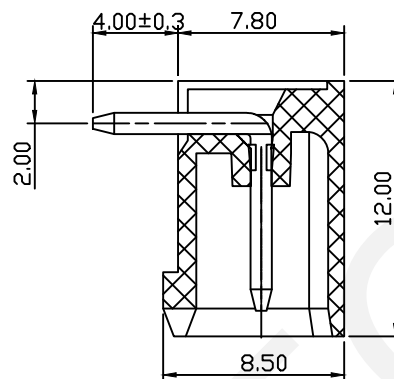
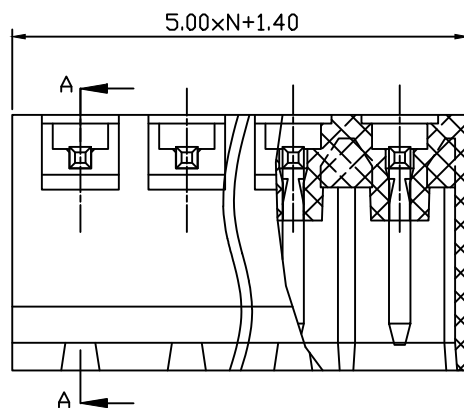




SECTION A-A

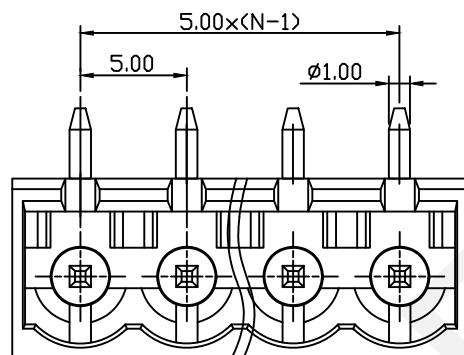

PCB LAYOUT

Material

Housing: PA66, UL94V-0

Pin: Brass, Tin Plated

Electrical

Rated voltage: 300V

Rated current: 15A

Contact Resistance: 20 mΩ

Insulation resistance: 500MΩ/DC500V

Withstand voltage: AC2000V/1min

Mechanical

Temp. Range: -40℃~+105℃

Order Information

RHTBYDRRC-5.00-XXP-4 XX

Terminal Block

Pitch

No. of Pole

Color: 4-Green

Product Code: 00~99

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Pluggable Terminal Block 5.00 MM

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTBYDRRC-5.00-XXP-4-00


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4



5

6



7

8

9

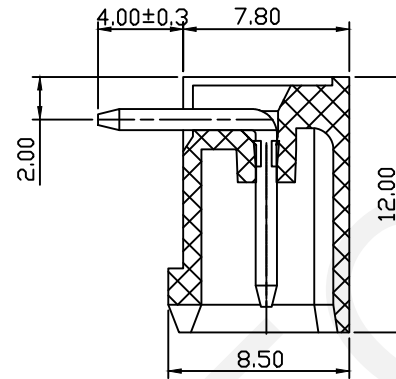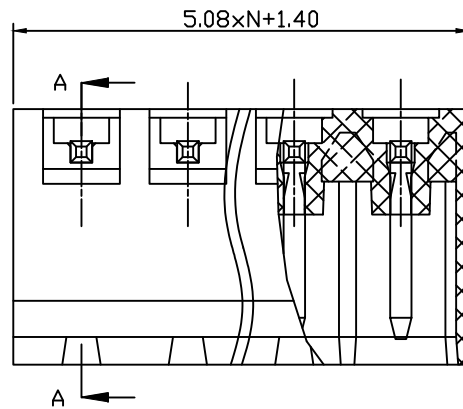

SECTION A-A

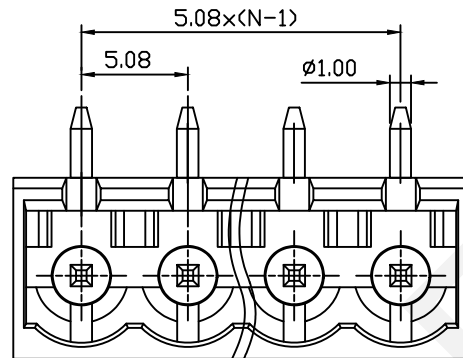

PCB LAYOUT

Material

Housing: PA66, UL94V-0

Pin: Brass, Tin Plated

Electrical

Rated voltage: 300V

Rated current: 15A

Contact Resistance: 20 mΩ

Insulation resistance: 500MΩ/DC500V

Withstand voltage: AC2000V/1min

Mechanical

Temp. Range: -40℃~+105℃

Order Information

RHTBYDRRC-5.08-XXP-4 XX

Terminal Block

Pitch

No. of Pole

Color: 4-Green

Product Code: 00~99

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Pluggable Terminal Block 5.08 MM

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTBYDRRC-5.08-XXP-4-00


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4

5

6

7

8

9