
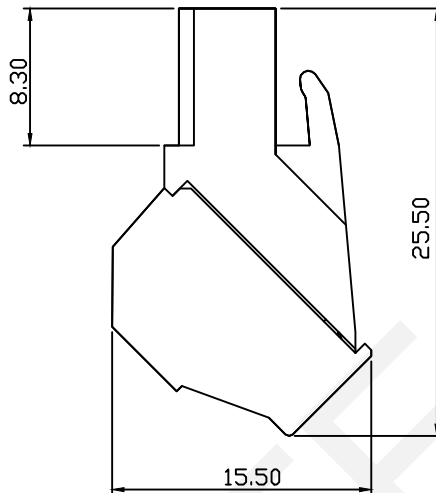
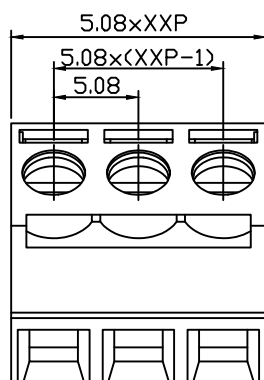


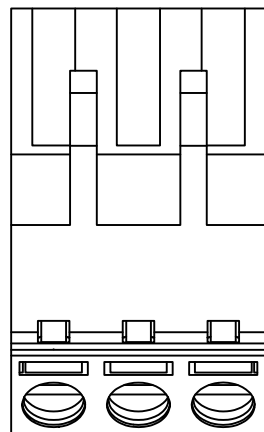

Electrical Characteristics	UL	IEC
Rated Voltage	300V	250V
Rated Current	15A	12A
Withstand Voltage	1600/1min	4.0KV
Wire Range	28~12 AWG	0.5~1.5 mm ²

Material and other:
Housing:PA66,UL94V-0
Pin header:Copper Alloy,Sn Plated
Stripping Length:7~8mm
Screw/Torque:M3/0.5N.m
Operating Temperature:-40°C~+105°C

Order Information

RHTBYLK-5.08-XXP-X X

Terminal Block

Pitch:5.08mm

No. of (02~24) Pins


Color:1=Gray 2=Blue 3=Black

4=Green 5=Orange 6=Red

7=Transp 8=Yellow 9=White

Screw:SC=Slot/Cross

S-Slot Screw C-Cross Screw

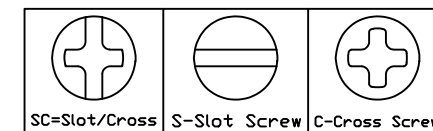

NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

±0.12

±0.15

±0.3

±0.5

CHK'D BY FENG

APPR BY ZHAN

Pitch 5.08mm Terminal Blocks

THIRD ANGLE PROJECTION



RHTBYLK-5.08-XXP-XX