


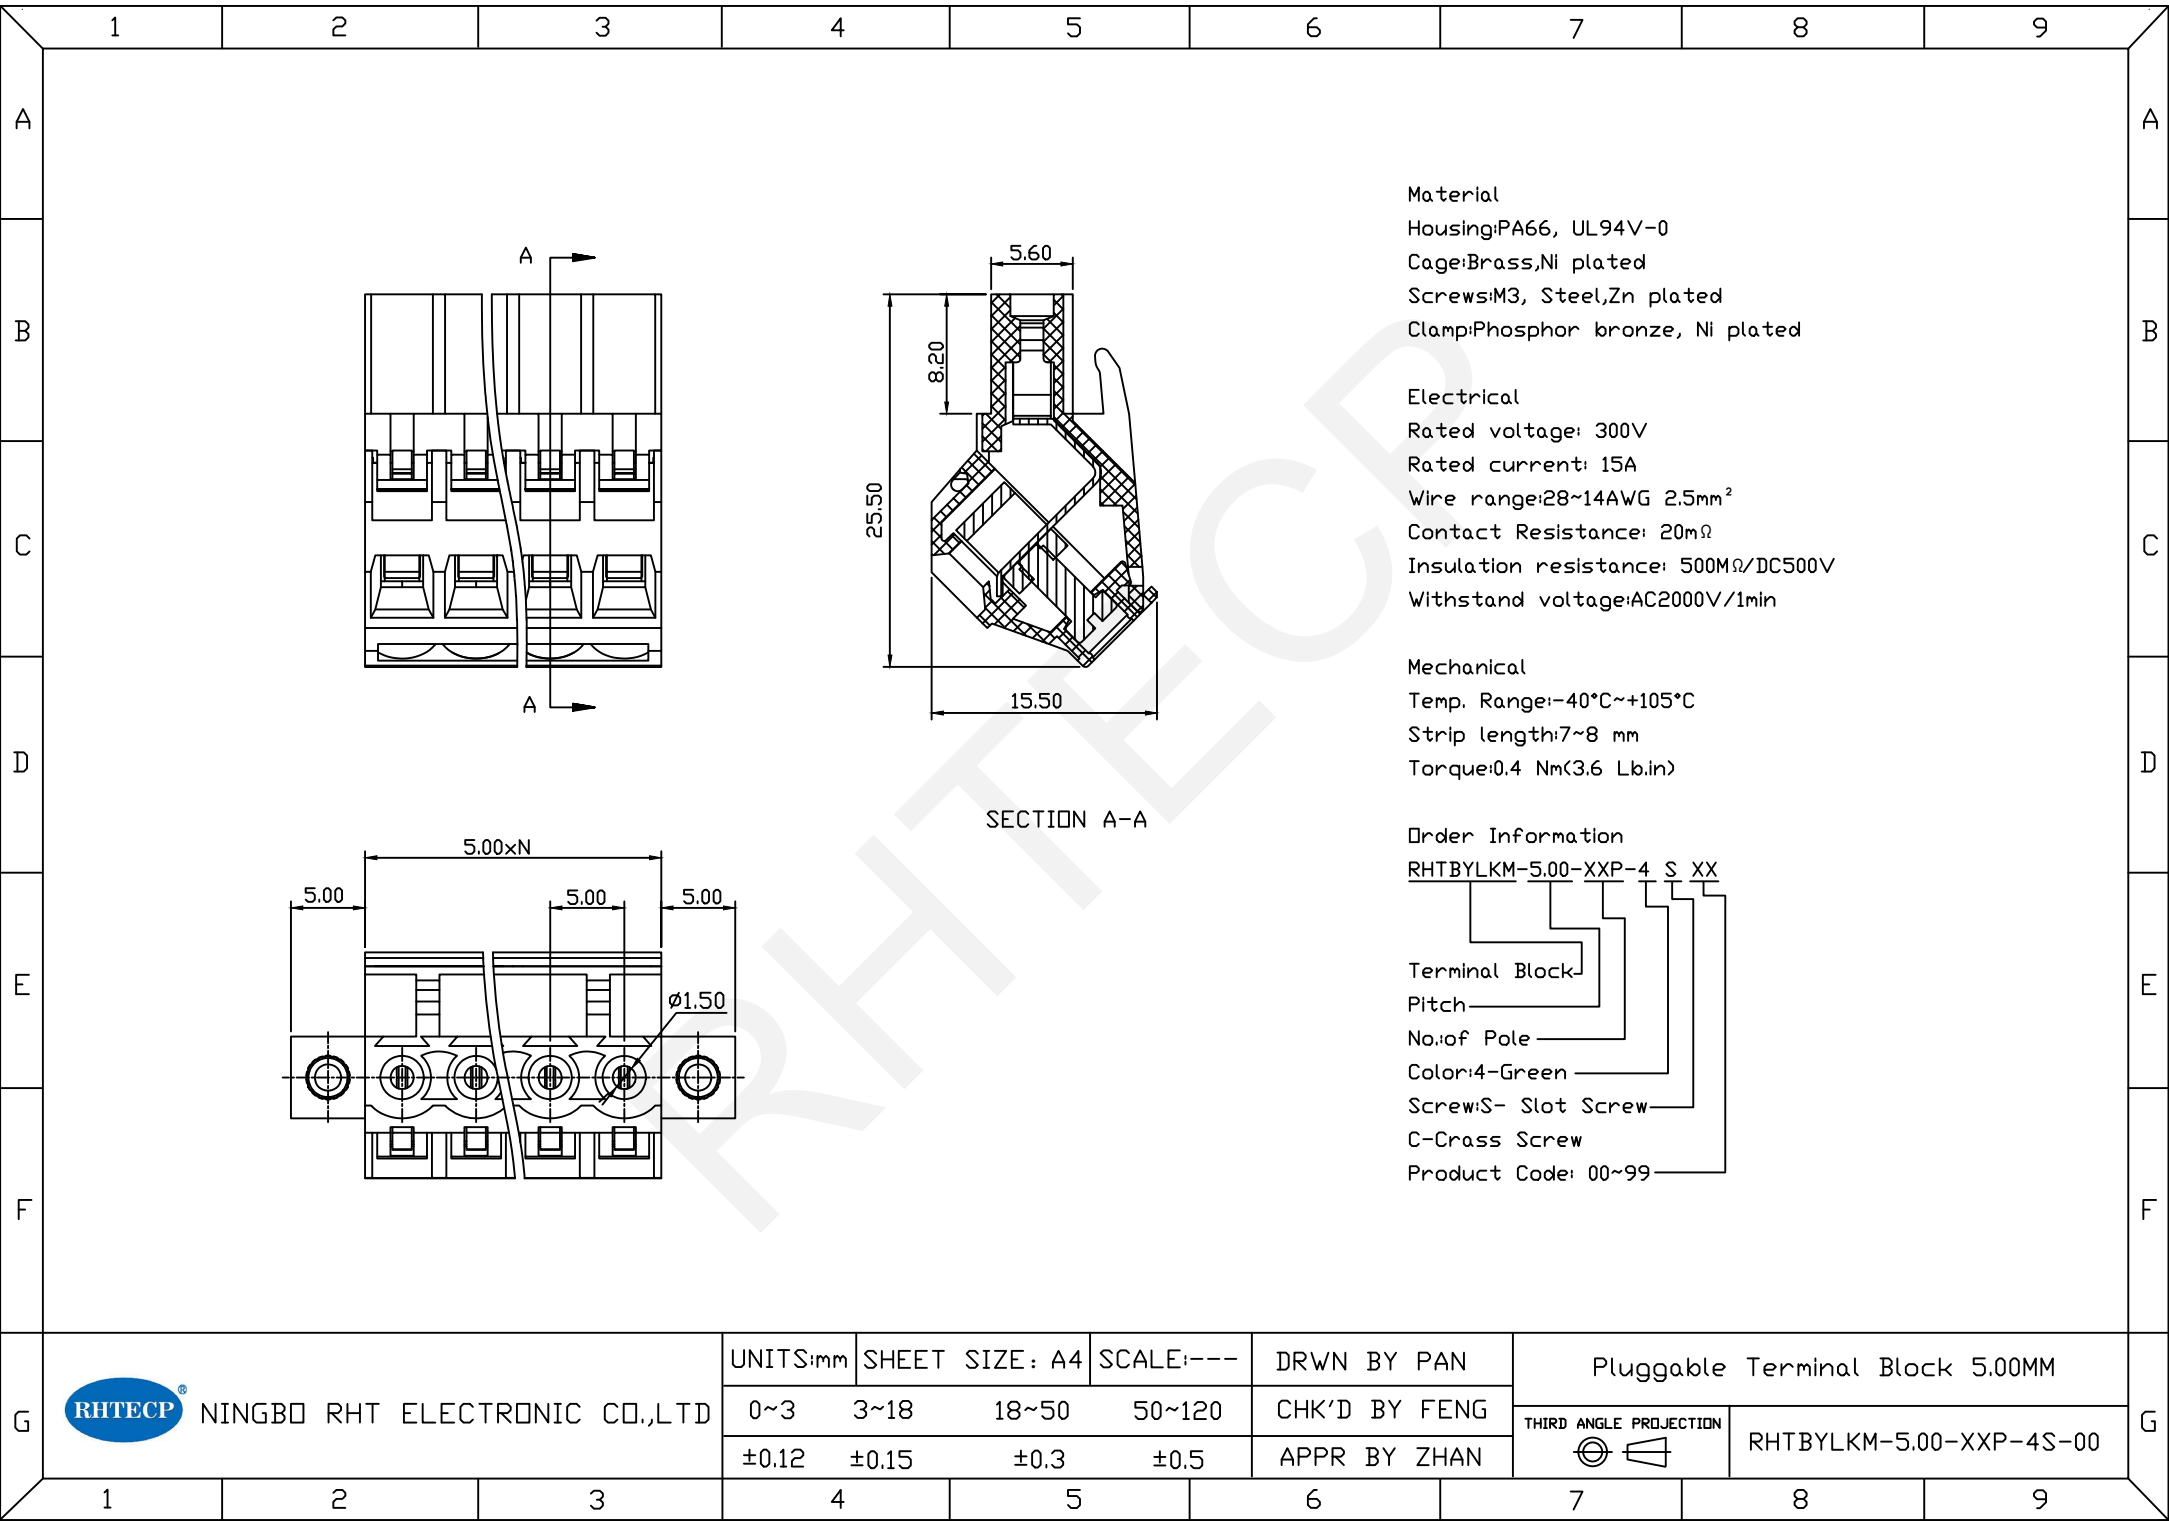


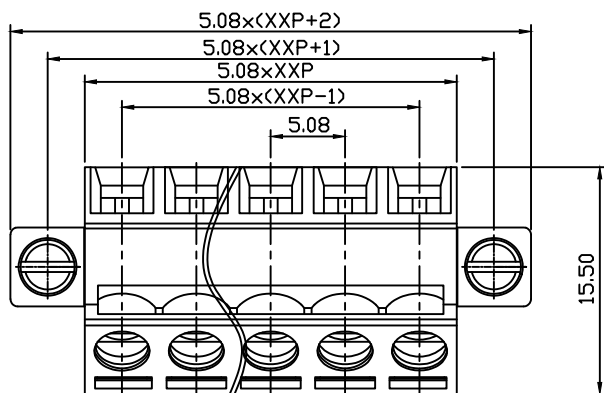

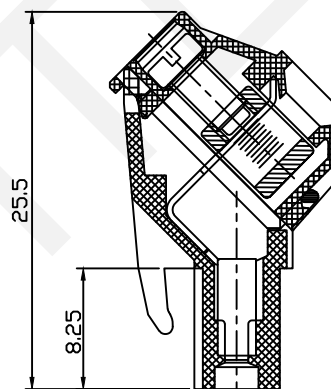

Electrical Characteristics	UL	IEC
Rated Voltage	300V	320V
Rated Current	15A	13.5A
Withstand Voltage	AC2000/1min	---
Wire Range	28~14 AWG	2.5 mm ²

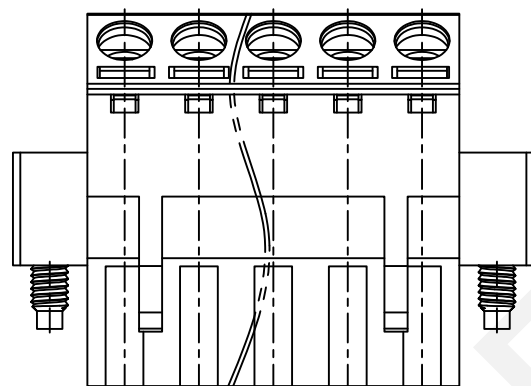


Material and other.
Housing: PA66, UL94V-0
Clamp/Wire Guard: Copper Alloy, Ni Plated
Screw/Torque: Steel, M3, Zn Plated/0.51N.m
Stripping Length: 7~8mm
Temp. Range: -40°C~+105°C

Order Information

RHTBYLKM-5.08-XXP-X X


Terminal Block
Pitch: 5.08mm
No. of (02~24) Pins
Color: 1=Gray 2=Blue 3=Black
4=Green 5=Orange 6=Red
7=Transp 8=Yellow 9=White
Screw: SC=Slot/Cross
S-Slot Screw C-Cross Screw

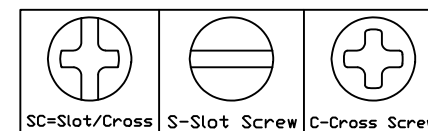

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
CHK'D BY FENG			
APPR BY ZHAN			

Pitch 5.08mm Terminal Block



RHTBYLKM-5.08-XXP-XX