

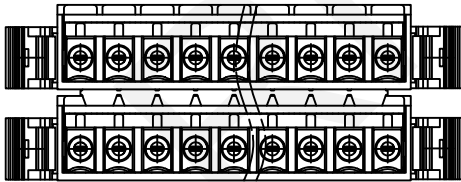
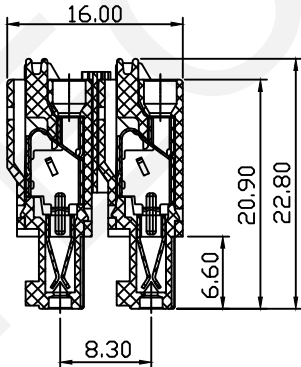
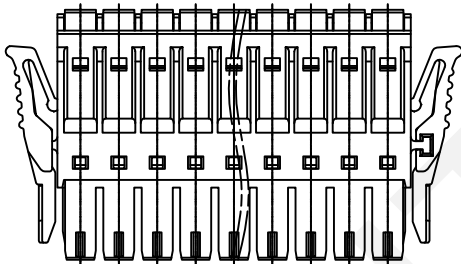



	1	2	3	4	5	6	7	8	9
A									A
B									B
C									C
D									D
E									E
F									F
G	 NINGBO RHT ELECTRONIC CO.,LTD			UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN	Pluggable Terminal Block 3.5 MM	
				0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION
				±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	 RHTBYMDD-3.50-XXP-4-00
	1	2	3	4	5	6	7	8	9

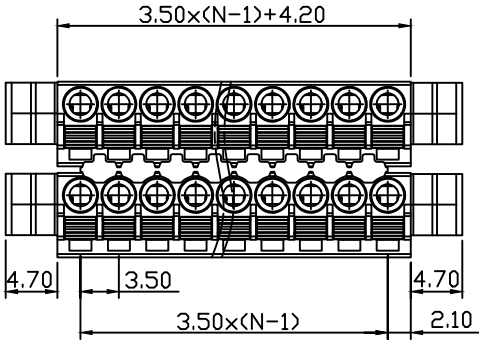

Material
Housing:PA66, UL94V-0
Clamp:Phosphor bronze, Tin Plated
Shrapnel:Stainless steel

Electrical
Rated voltage:300V
Rated current: 8A
Wire range:24~16AWG 1.0mm²
Contact Resistance: 20 mΩ
Insulation resistance: 500MΩ/DC500V
Withstand voltage: AC2000V/1min

Mechanical
Temp.Range: -40℃~+105℃
Strip length: 9~10mm

Order Information
RHTBYMDD-3.50-XXP-4 XX

Terminal Block
Pitch
No.of Pole
Color:4-Green
Product Code: 00~99