



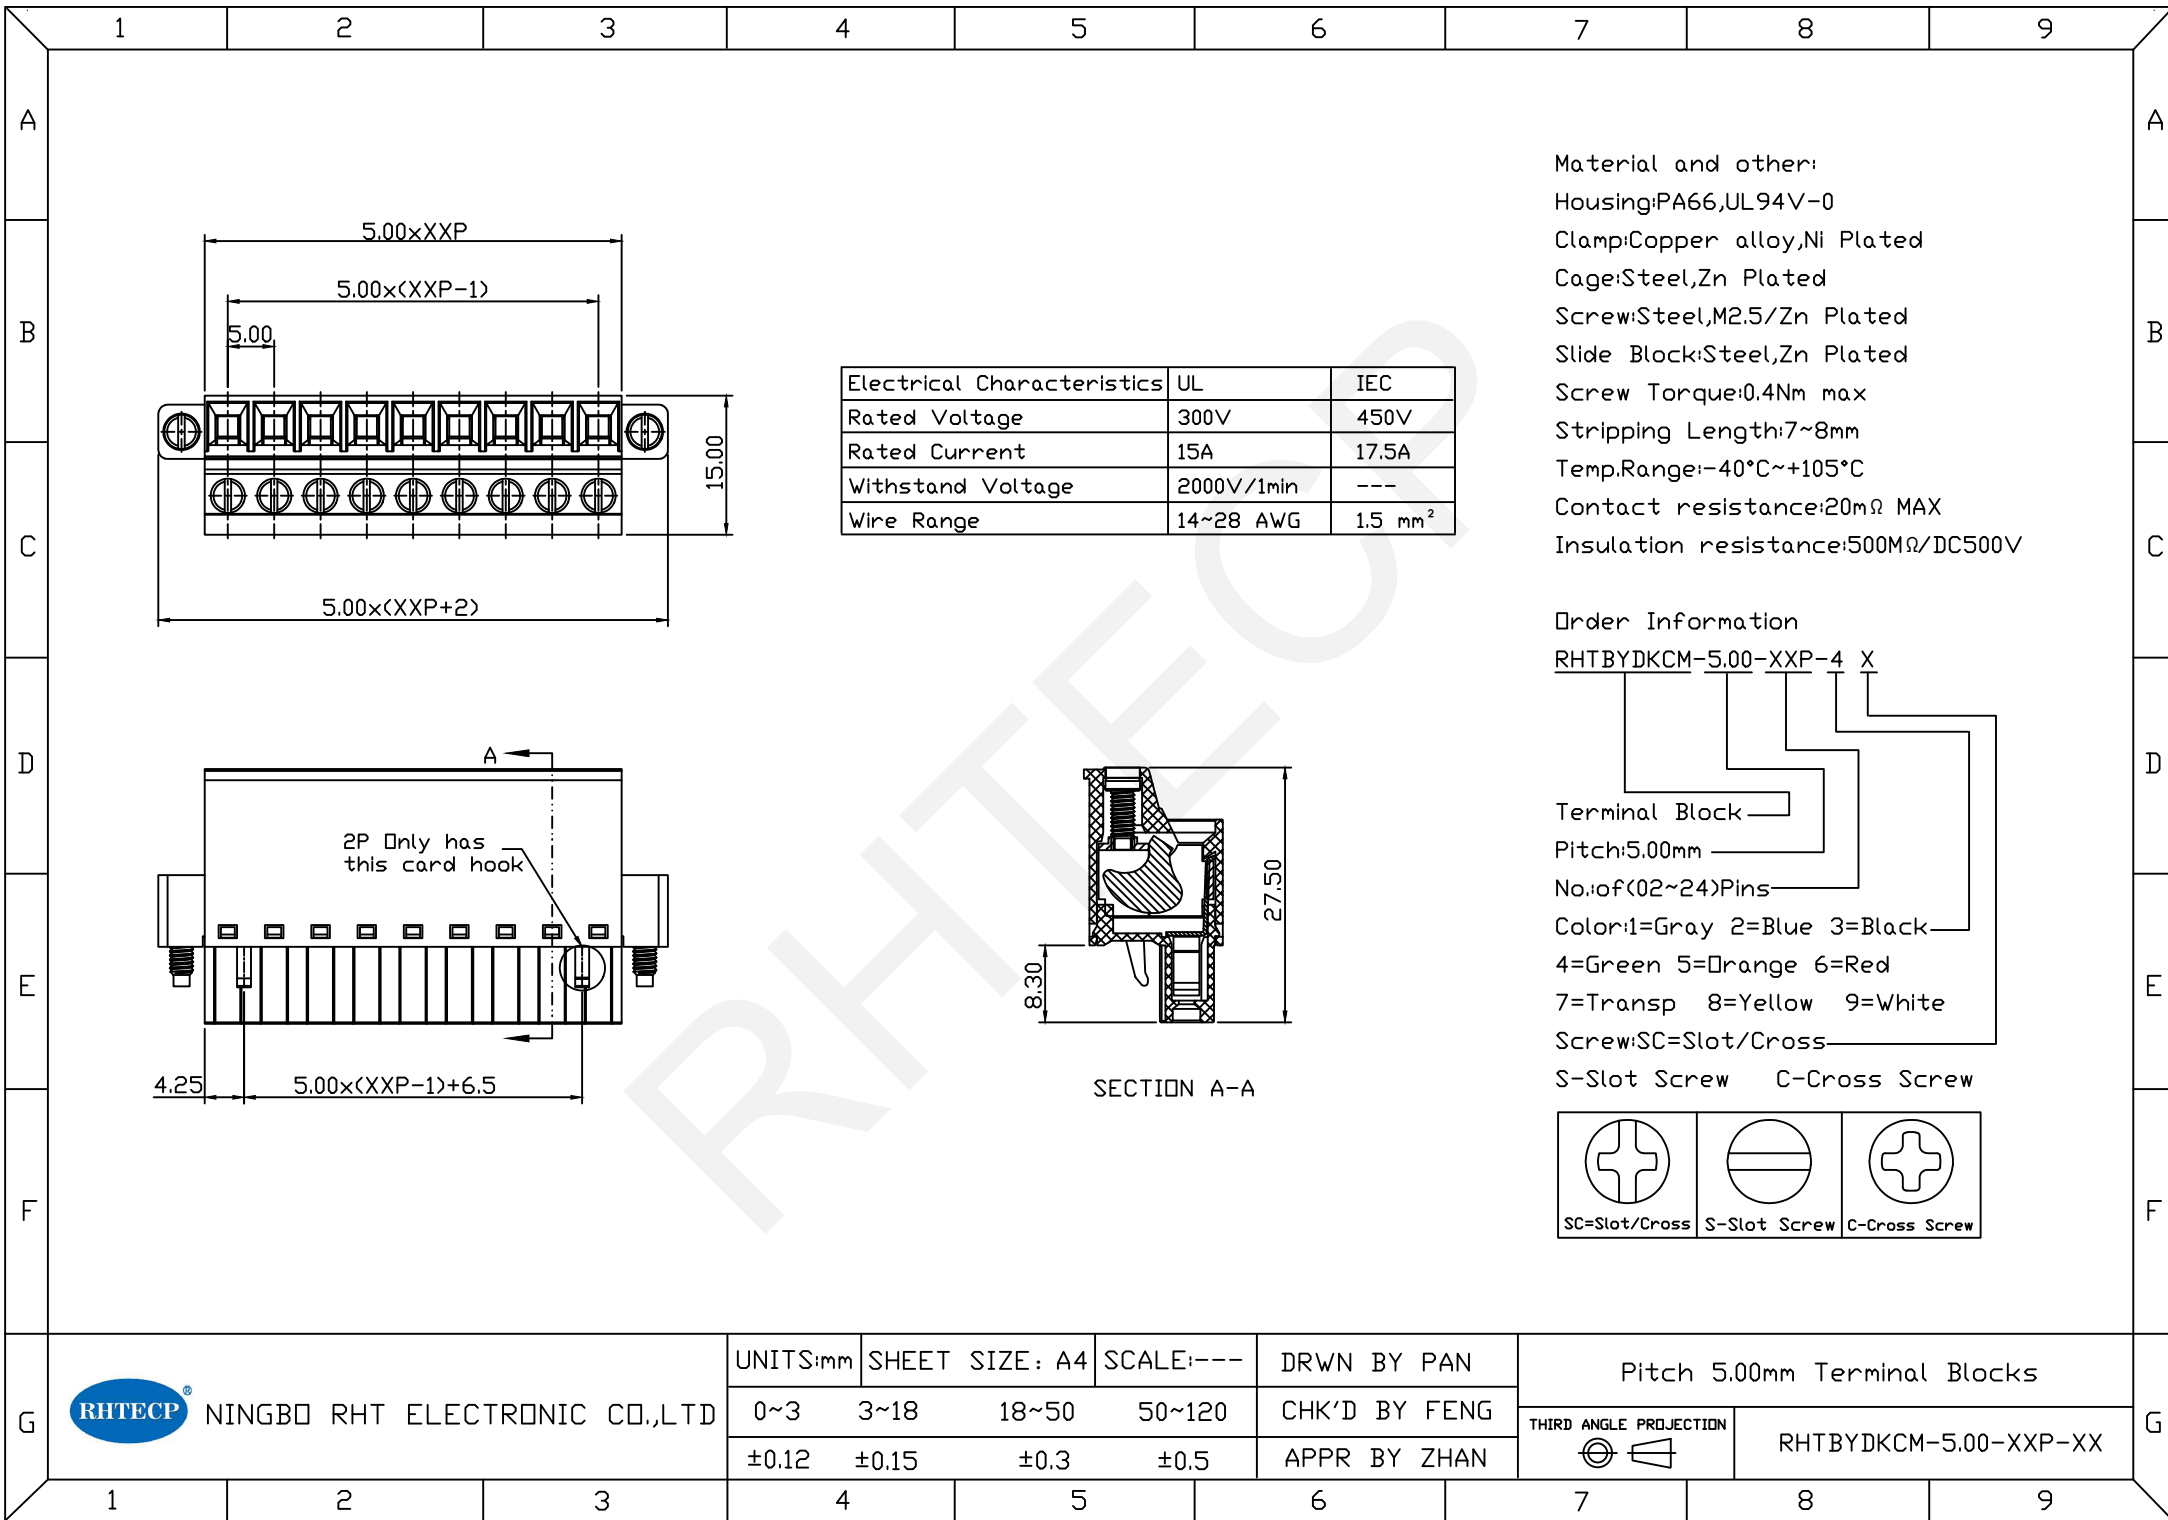


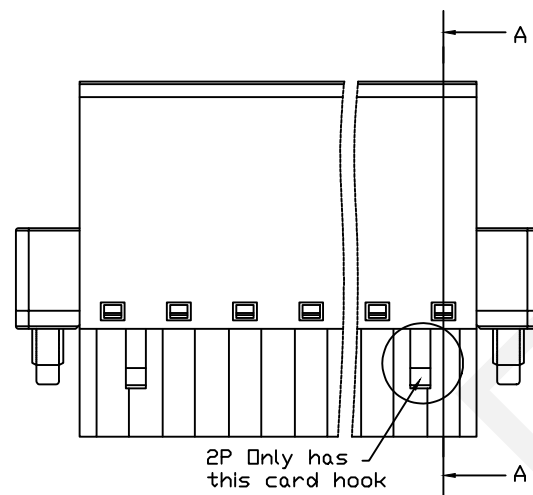

Electrical Characteristics	UL	IEC
Rated Voltage	300V	450V
Rated Current	15A	17.5A
Withstand Voltage	AC2000V/1min	---
Wire Range	28~14 AWG	1.5 mm ²

Material and other:
Housing:PA66,UL94V-0
Clamp:Phosphor Bronze,Ni Plated
Cage:Steel,Zn Plated
Screw/Torque:Steel,M2.5,Zn Plated/0.4N.m
Slide Block:Steel,Zn Plated
Contact resistance:20mΩ MAX
Insulation resistance:500MΩ/DC500V
Stripping Length:7~8mm
Temp.Range:-40°C~+105°C

RHTBYDKCM-5.08-XXP-X X

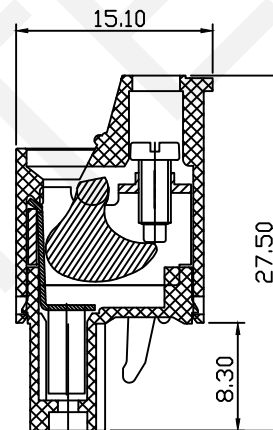

SECTION A-A

Terminal Block
Pitch:5.08mm
No.of(02~24)Pins
Color:1=Gray 2=Blue 3=Black
4=Green 5=Orange 6=Red
7=Transp 8=Yellow 9=White
Screw:SC=Slot/Cross
S-Slot Screw C-Cross Screw

