

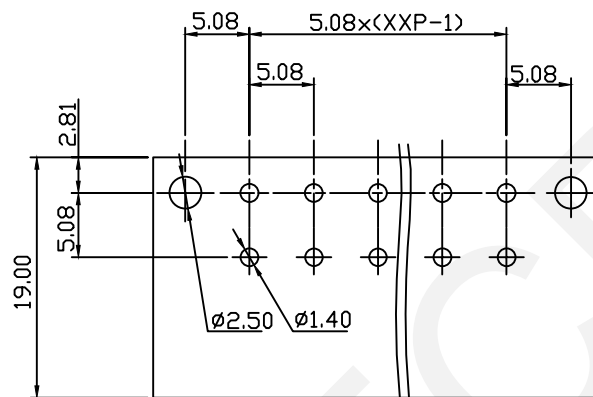
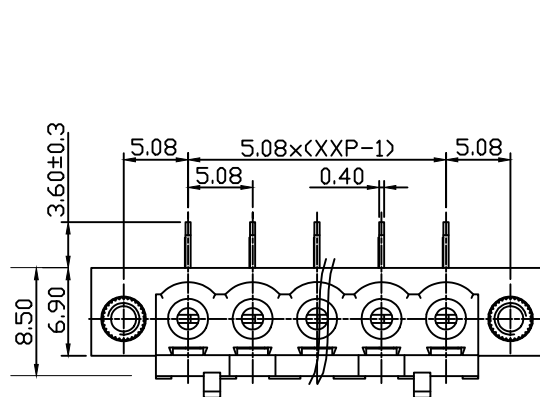


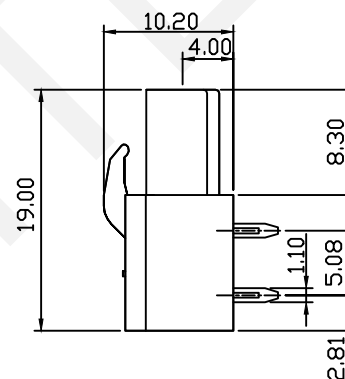

Recommended PCB Layout

2P Only has
this card hook

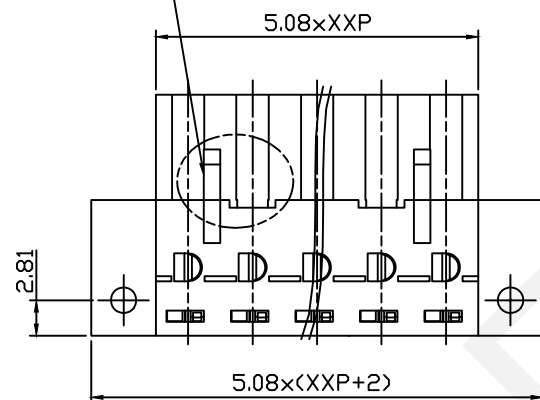

Material and other:
Housing: PA66, UL94V-0
Pin Header: Copper Alloy, Sn Plated
Operating Temperature: -40°C~+105°C
Soldering Temperature: +260°C/5S

Order Information

RHTBYDKRM-5.08-XXP-X

Terminal Block

Pitch: 5.08mm

No. of (02~24) Pins

Color: 1=Gray 2=Blue 3=Black

4=Green 5=Orange 6=Red

7=Transp 8=Yellow 9=White


Electrical Characteristics	UL	IEC
Rated Voltage	300V	320V
Rated Current	15A	12A
Withstand Voltage	1600V/1min	4.0KV

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
			CHK'D BY FENG
			APPR BY ZHAN

Pitch 5.08mm Terminal Blocks

THIRD ANGLE PROJECTION



RHTBYDKRM-5.08-XXP-X