




Material
Housing:PA66,UL94V-0
Pin Header:Copper Alloy,Sn Plated
Contact Resistance:20mΩ Max
Insulation Resistance:500MΩ/DC500V Min
Temp.Range:-40°C~+105°C
MAX Soldering:250°C For 5S

Order Information
RHTBYDLF-5.00-02P-X
Terminal Block
Pitch:5.00mm
No. of 02 Pin
Color:1=Gray 2=Blue
3=Black 4=Green 5=Orange
6=Red 7=Transp 8=Yellow 9=White


Electrical Characteristics	UL	IEC
Rated Voltage	300V	320V
Rated Current	12A	15A
Withstand Voltage	AC2000V/1min	---

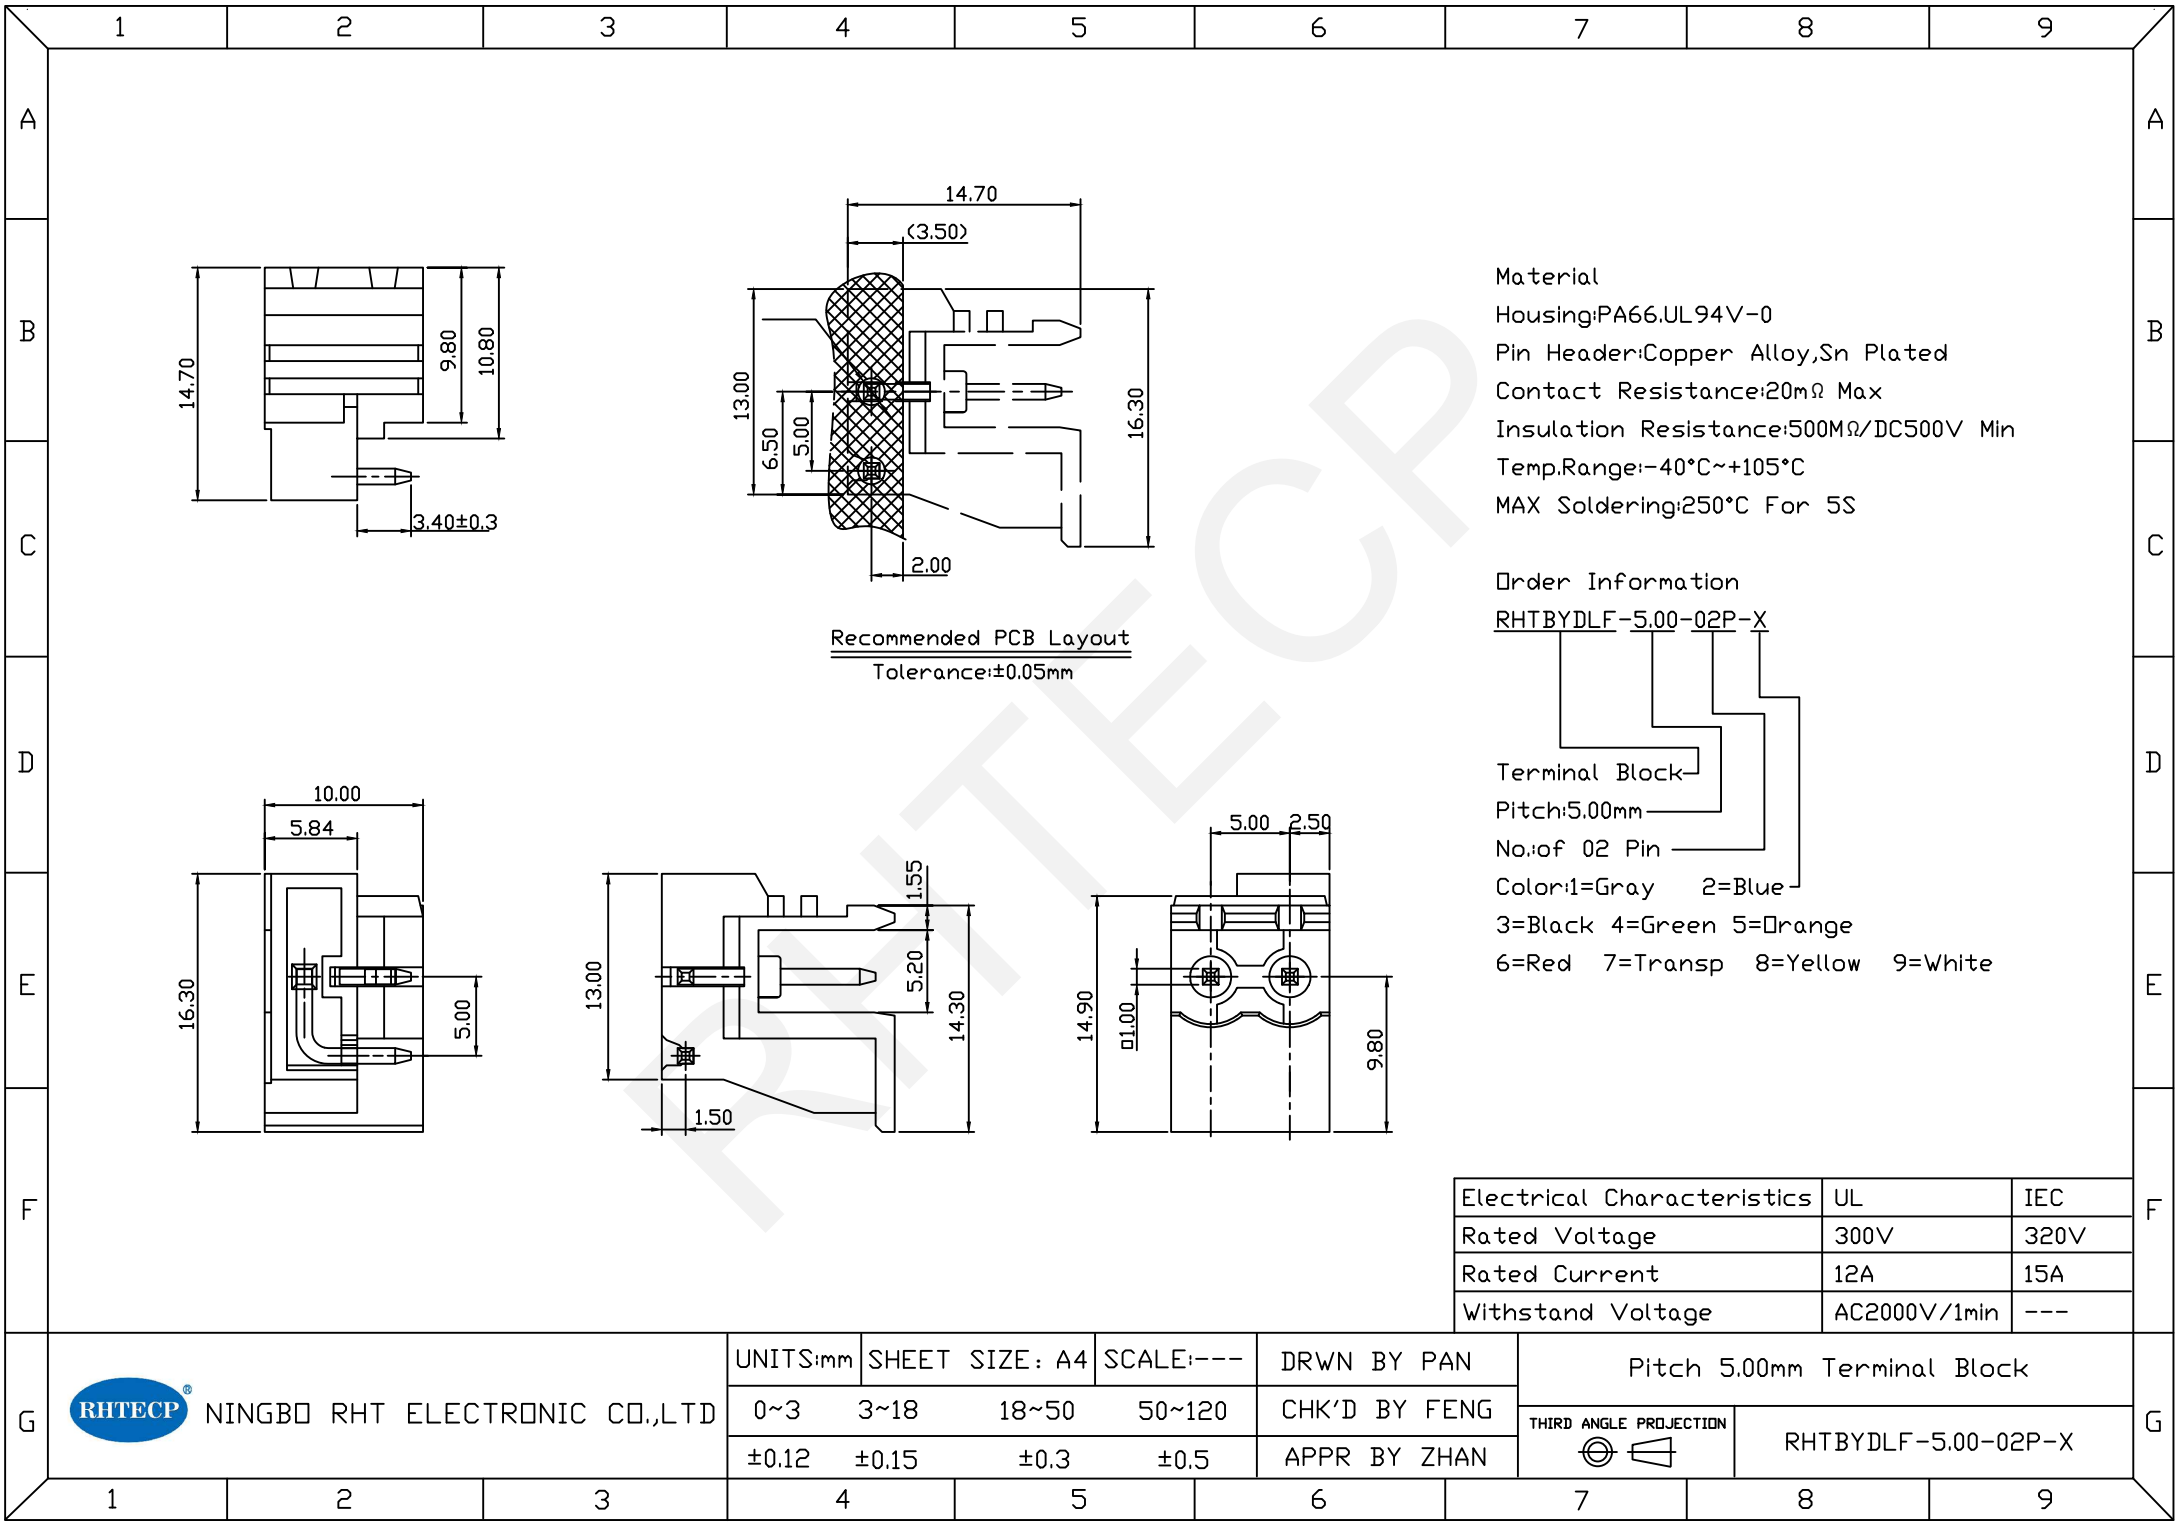




NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
CHK'D BY FENG			
APPR BY ZHAN			

Pitch 5.00mm Terminal Block



RHTBYDLF-5.00-02P-X

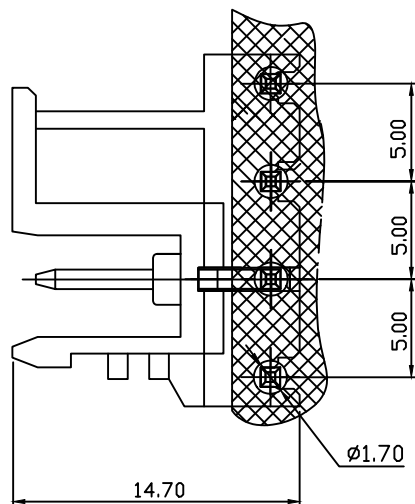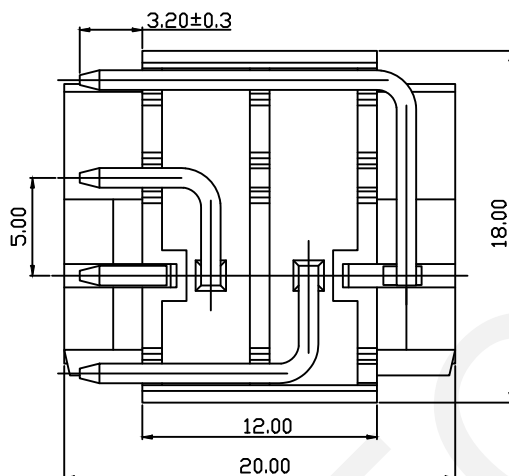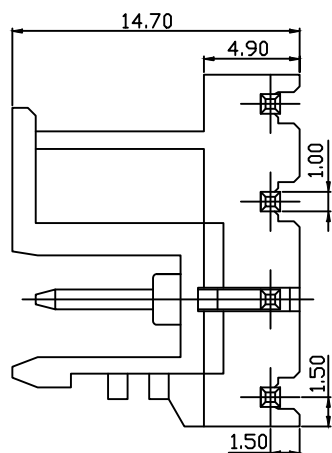


Recommended PCB Layout
Tolerance:±0.05mm

Electrical Characteristics	UL	IEC
Rated Voltage	300V	320V
Rated Current	12A	15A
Withstand Voltage	AC2000V/1min	---

Material
Housing:PA66,UL94V-0
Pin Header:Copper Alloy,Sn Plated
Contact Resistance:20mΩ Max
Insulation Resistance:500MΩ/DC500V Min
Temp.Range:-40°C~+105°C
MAX Soldering:250°C For 5S

Order Information

RHTBYDLF-5.00-04P-X



Color:1=Gray 2=Blue
3=Black 4=Green 5=Orange
6=Red 7=Transp 8=Yellow 9=White




NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5

CHK'D BY FENG
APPR BY ZHAN

Pitch 5.00mm Terminal Block



RHTBYDLF-5.00-04P-X