

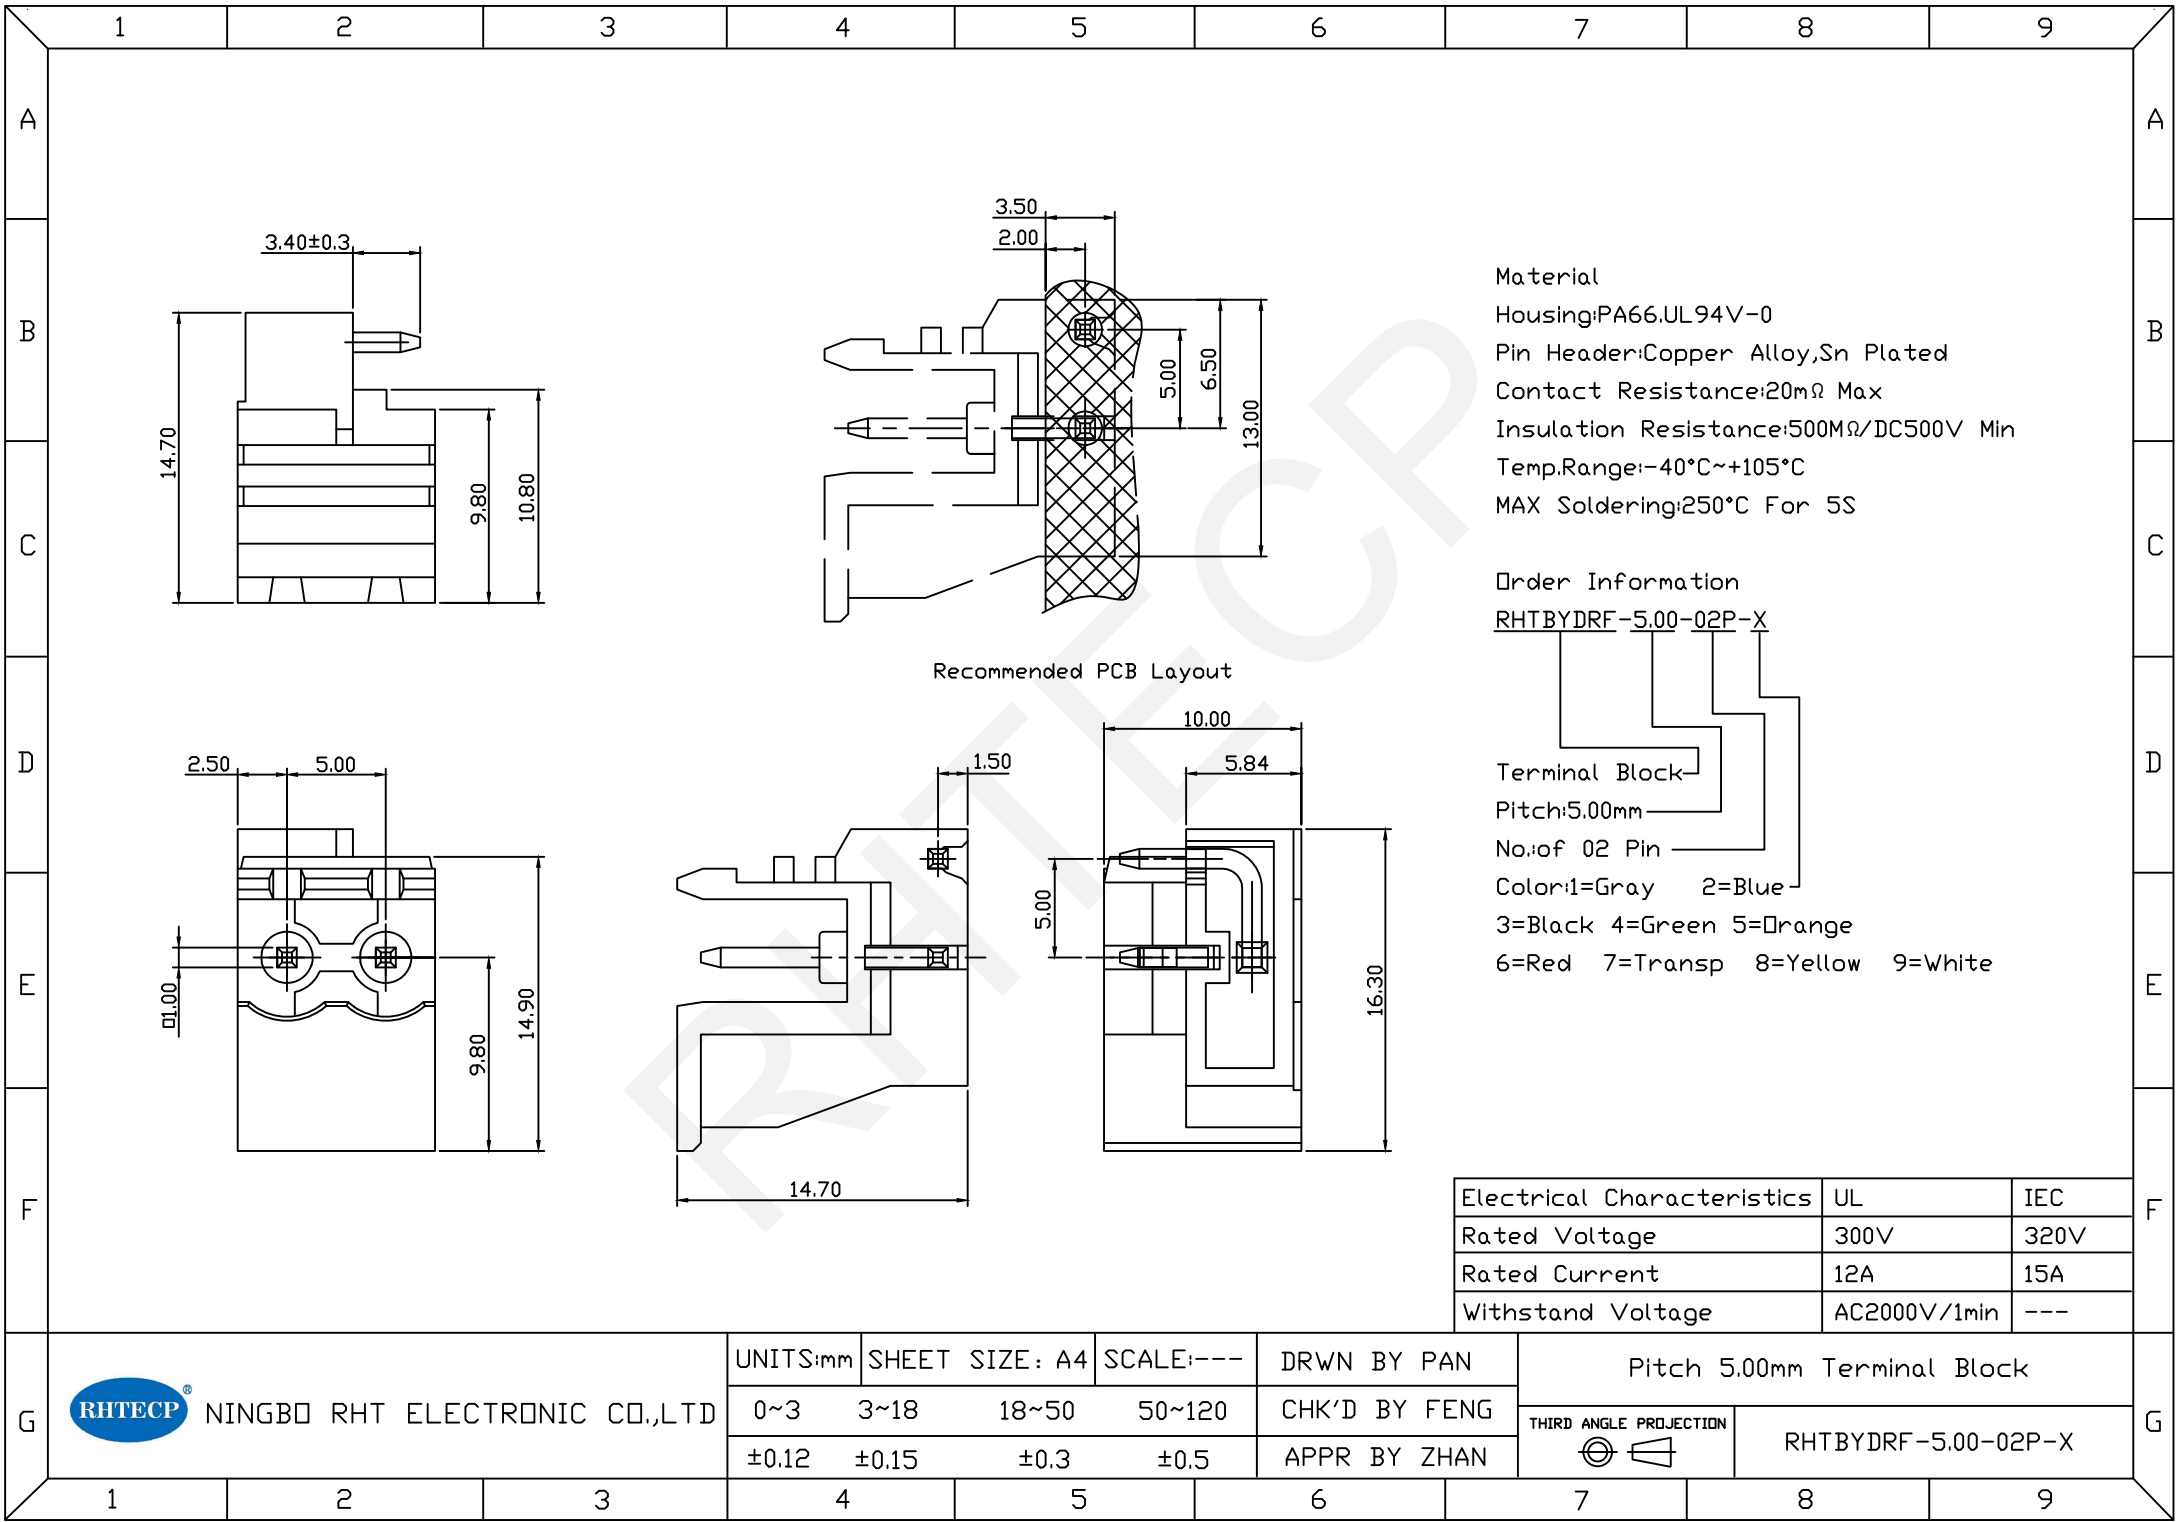
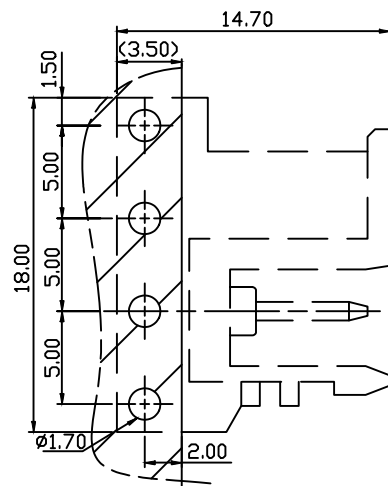


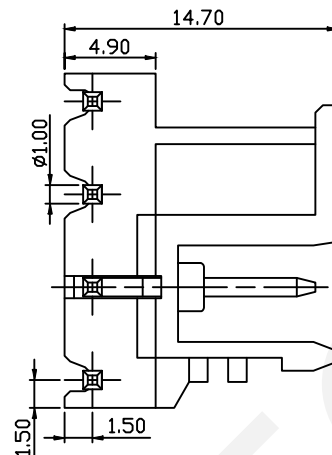

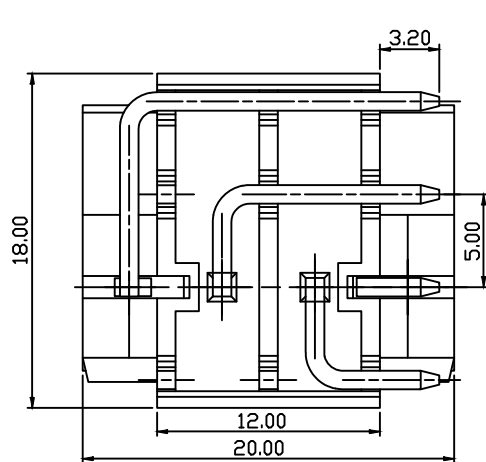

Recommended PCB Layout

Electrical Characteristics	UL	IEC
Rated Voltage	300V	320V
Rated Current	12A	15A
Withstand Voltage	AC2000V/1min	---

Material

Housing:PA66,UL94V-0

Pin Header:Copper Alloy,Sn Plated

Contact Resistance:20mΩ Max

Insulation Resistance:500MΩ/DC500V Min

Temp.Range:-40°C~+105°C

MAX Soldering:250°C For 5S

Order Information

RHTBYDRF-5.00-04P-X

Terminal Block

Pitch:5.00mm

No.of 04 Pin

Color:1=Gray 2=Blue

3=Black 4=Green 5=Orange

6=Red 7=Transp 8=Yellow 9=White



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

±0.12

±0.15

±0.3

±0.5

CHK'D BY FENG

APPR BY ZHAN

Pitch 5.00mm Terminal Block

THIRD ANGLE PROJECTION



RHTBYDRF-5.00-04P-X