


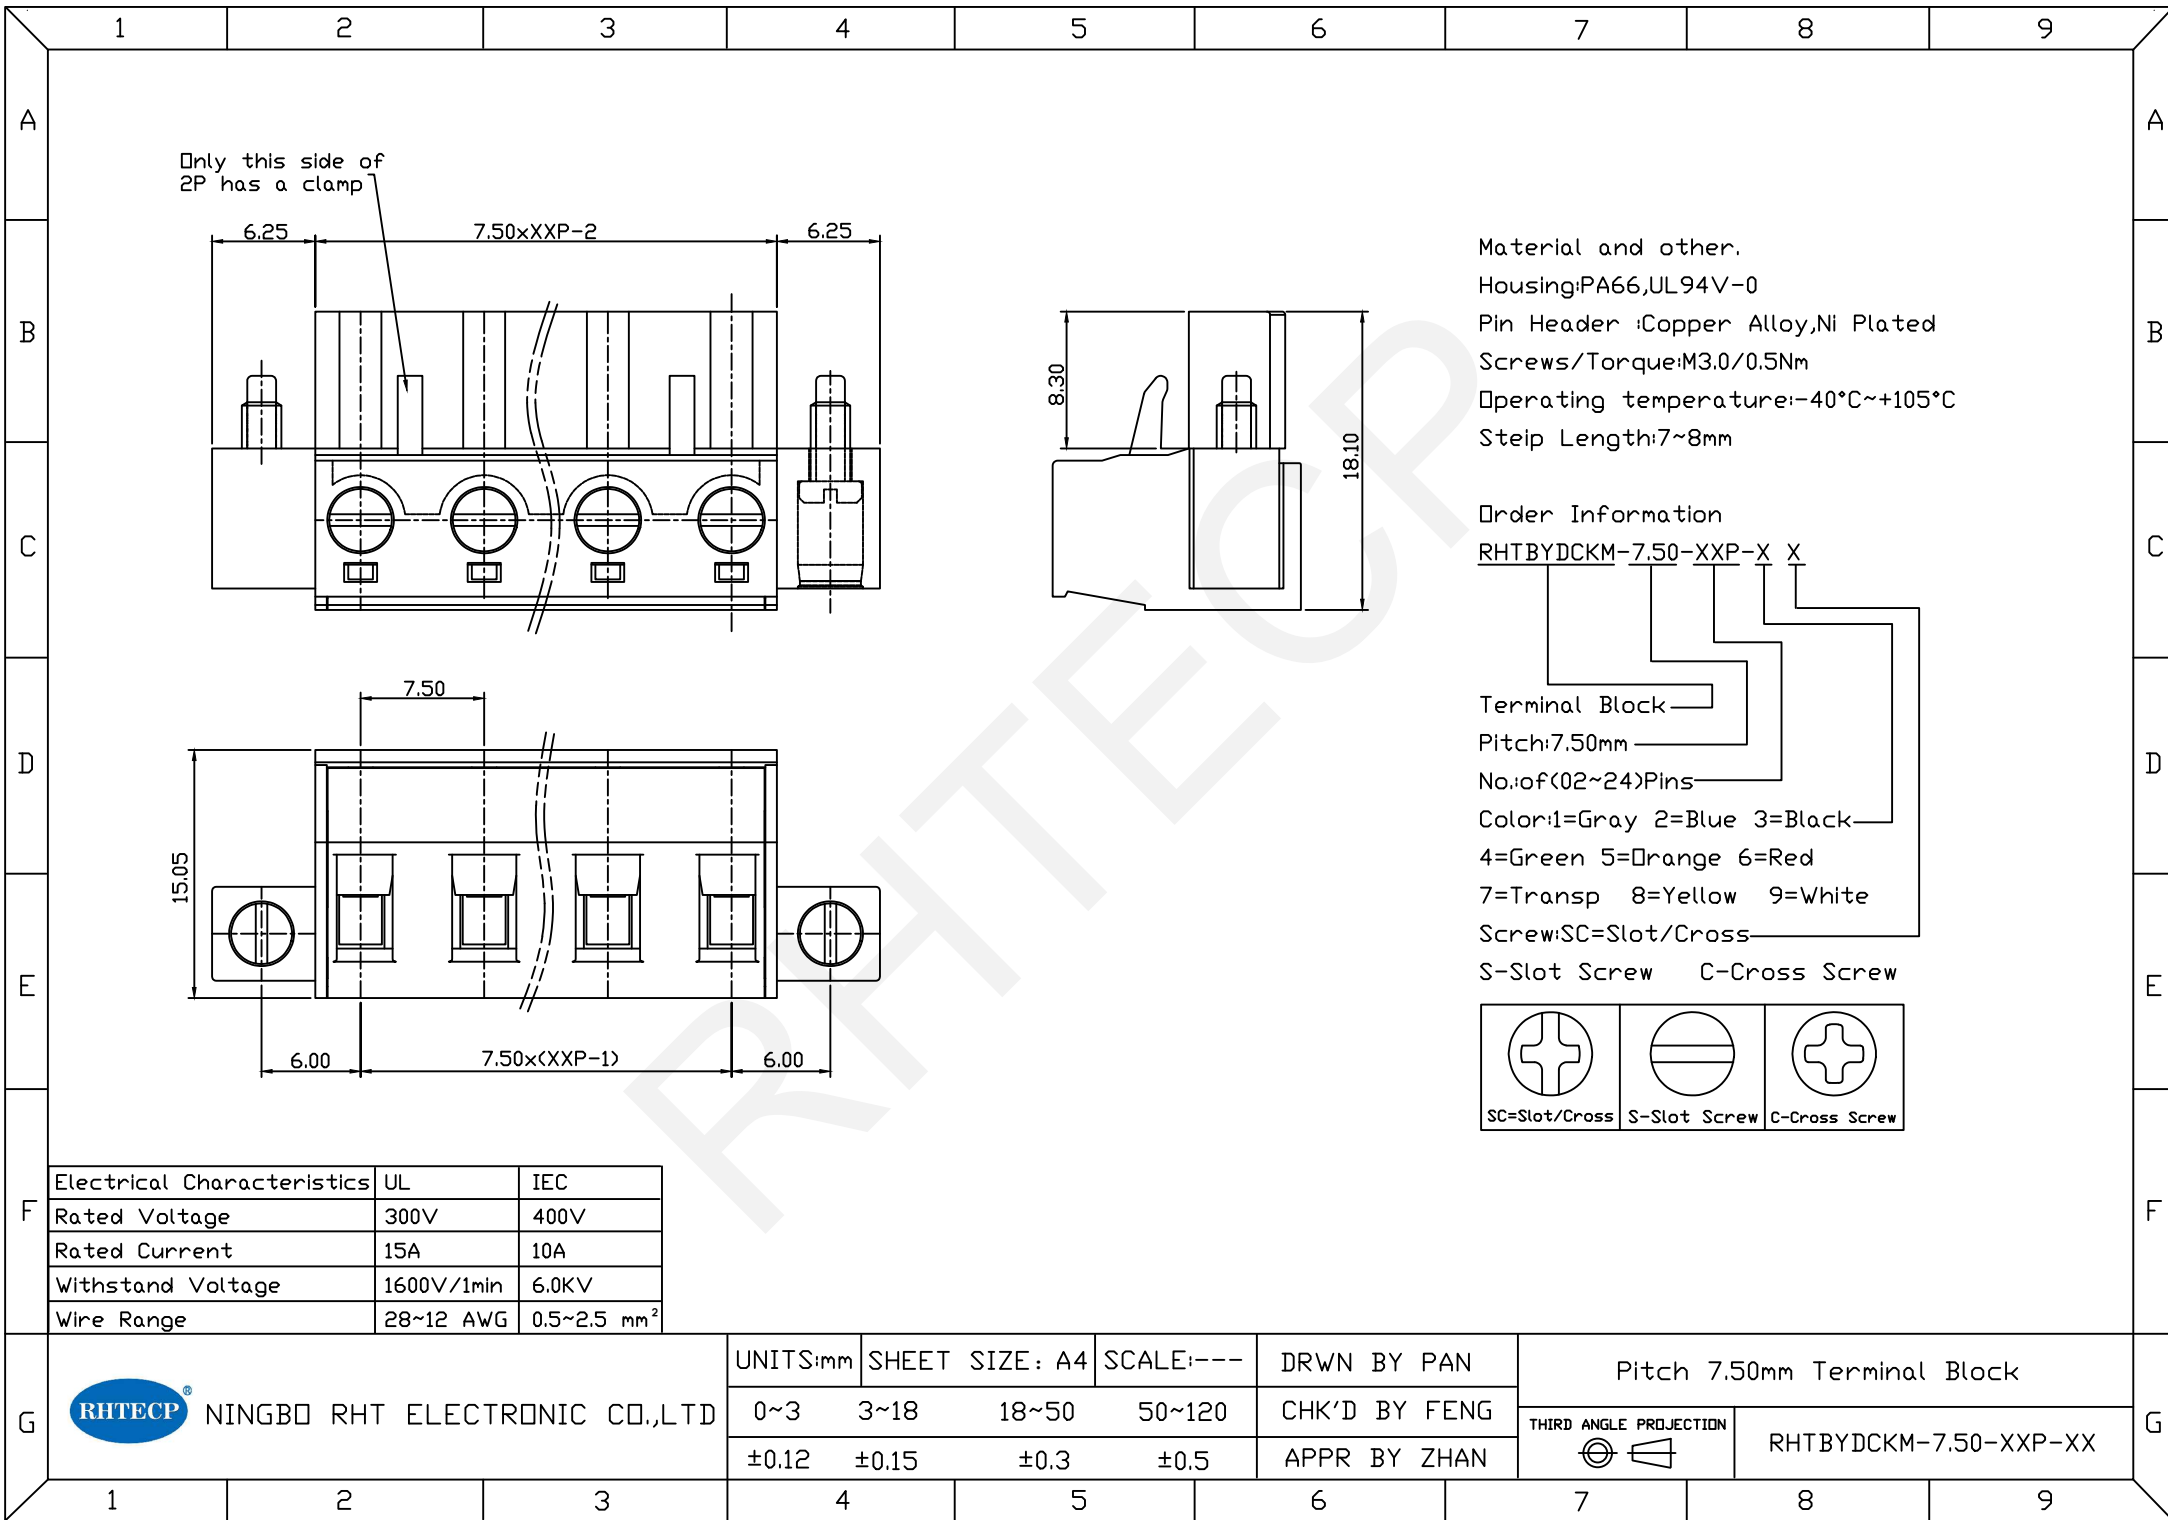




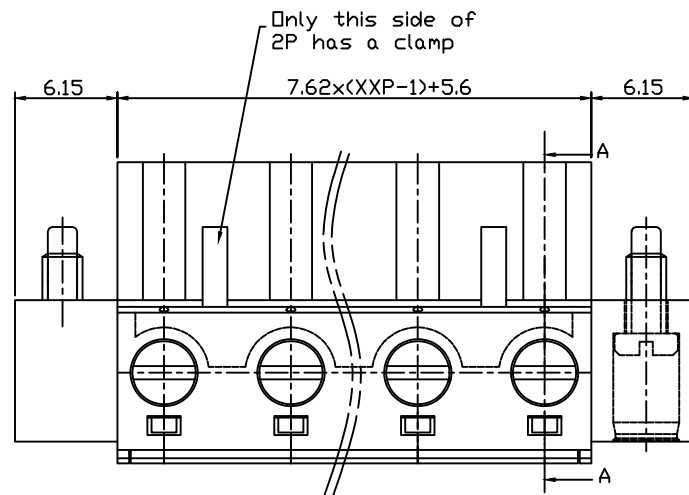

Section:A-A

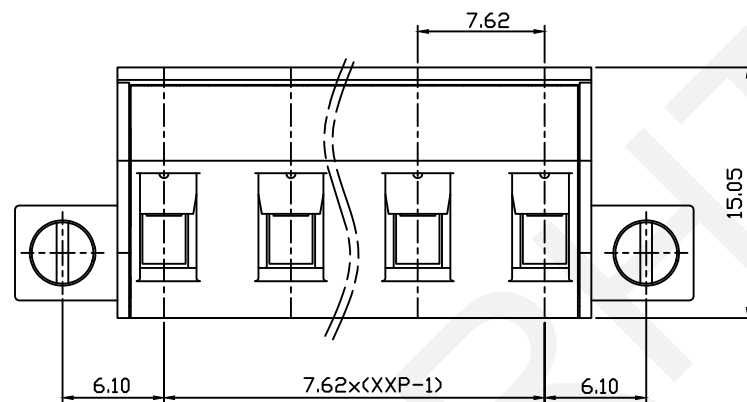


Material and other.
Housing:PA66,UL94V-0
Pin Header :Copper Alloy,Ni Plated
Screws/Torque:M3.0/0.5Nm
Operating temperature:-40°C~+105°C
Steip Length:7~8mm

Order Information

RHTBYDCKM-7.62-XXP-X X

Terminal Block
Pitch:7.62mm
No. of (02~24) Pins
Color:1=Gray 2=Blue 3=Black
4=Green 5=Orange 6=Red
7=Transp 8=Yellow 9=White
Screw:SC=Slot/Cross
S-Slot Screw C-Cross Screw

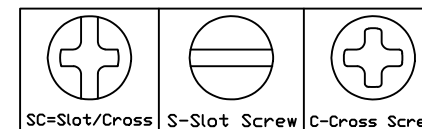

Electrical Characteristics	UL	IEC
Rated Voltage	300V	400V
Rated Current	15A	10A
Withstand Voltage	1600V/1min	6.0KV
Wire Range	28~12 AWG	0.5~2.5 mm ²

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN	Pitch 7.62mm Terminal Block	
0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION RHTBYDCKM-7.62-XXP-XX
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	



NINGBO RHT ELECTRONIC CO.,LTD



RHTBYDCKM-7.62-XXP-XX