

Material and other:
Housing: PA66, UL94V-0
Pin Header: Copper Alloy, Sn Plated
Operating Temperature: -40°C ~ +105°C
Soldering Temperature: 260°C/5S

Order Information

RHTBYDGM-5.08-XXP-X

Terminal Block



Pitch: 5.08mm

No. of (02~24) Pin

Color: 1=Gray 2=Blue

3=Black 4=Green 5=Orange

6=Red 7=Transp 8=Yellow 9=White

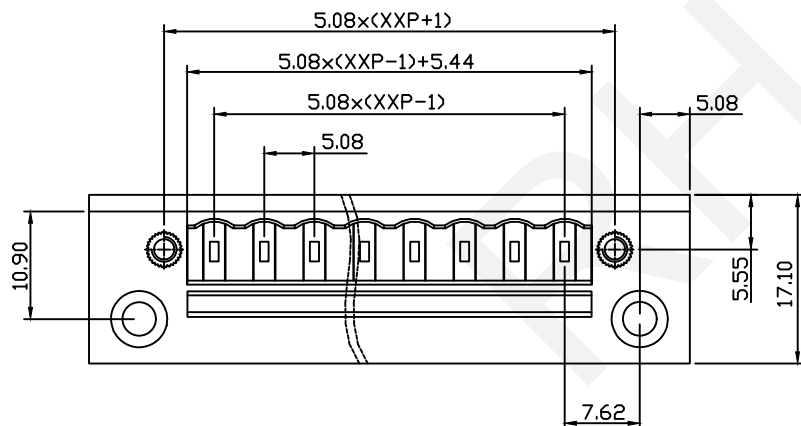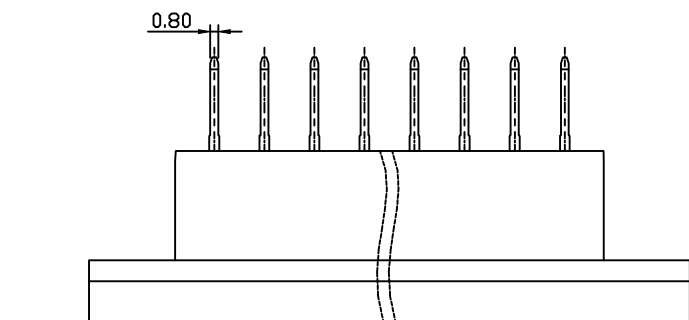

Electrical Characteristics	UL	IEC
Rated Voltage	300V	320V
Rated Current	15A	12A
Withstand Voltage	1600V/1min	4.0KV



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Pitch 5.08mm Pluggable
Terminal Block,Socket

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTBYDGM-5.08-XXP-X


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4

5

6

7

8

9