


The two line without the feet

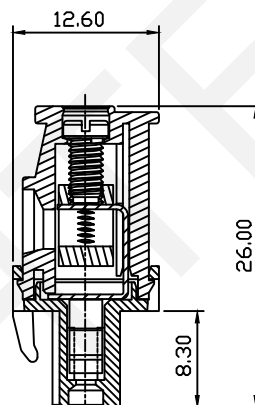

Material

Housing:PA66,UL94V-0

Clamp:Phosphor Bronze,Ni Plated

Cage:Brass,Ni Plated

Temp.Range:-40°C~+105°C

Strip length:7~8mm

Screw/Torque:Steel,M3 ,Zn Plated/0.5N.m Max

Contact resistance:20mΩ MAX

Insulation resistance:500MΩ/DC500V

Order Information

RHTBYDKA-7.50-XXP-X X

Terminal Block

Pitch:7.50mm

No.:of(02~24)Pins


Color:1=Gray 2=Blue 3=Black

4=Green 5=Orange 6=Red

7=Transp 8=Yellow 9=White

Screw:SC=Slot/Cross

S-Slot Screw C-Cross Screw

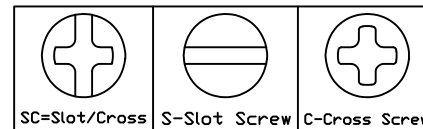

Electrical Characteristics	UL	IEC
Rated Voltage	300V	450V
Rated Current	15A	17.5A
Withstand Voltage	AC2000/1min	---
Wire Range	14~28 AWG	1.5 mm ²



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---
0~3	3~18	18~50
50~120		
±0.12	±0.15	±0.3
		±0.5

DRWN BY PAN

CHK'D BY FENG



APPR BY ZHAN

7.50mm Pluggable terminal blocks



THIRD ANGLE PROJECTION



RHTBYDKA-7.50-XXP-XX

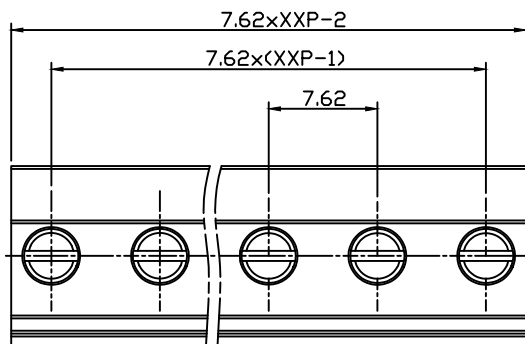


Material and other:
Housing: PA66, UL94V-0
Clamp: Phosphor Bronze, Ni Plated
Cage: Brass, Ni Plated
Screw/Torque: Steel, M3, Zn Plated / 0.5N.m Max
Contact resistance: 20mΩ MAX
Insulation resistance: 500MΩ/DC500V
Strip length: 7~8mm
Temp. Range: -40°C ~ +105°C

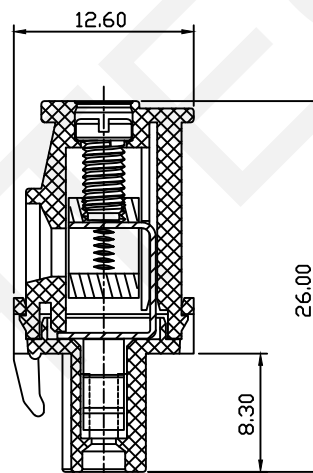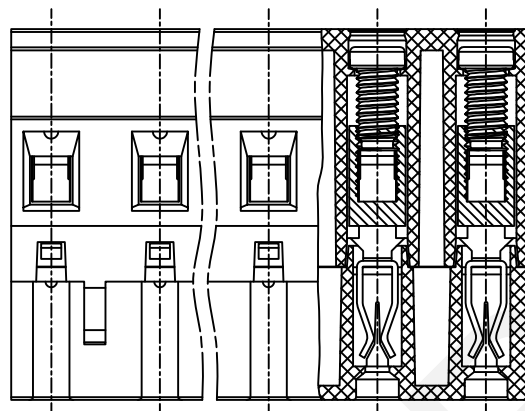

Order Information

RHTBYDKA-7.62-XXP-X X

Terminal Block
Pitch: 7.62mm
No. of (02~24) Pins
Color: 1=Gray 2=Blue 3=Black
4=Green 5=Orange 6=Red
7=Transp 8=Yellow 9=White
Screw: SC=Slot/Cross
S-Slot Screw C-Cross Screw

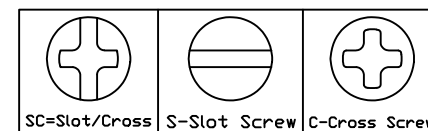

Electrical Characteristics	UL	IEC
Rated Voltage	300V	750V
Rated Current	15A	20A
Withstand Voltage	AC2000/1min	---
Wire Range	28~14 AWG	2.5 mm ²

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN	Pitch 7.62mm Terminal Block
0~3	3~18	18~50	50~120	CHK'D BY FENG
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN
				THIRD ANGLE PROJECTION
				RHTBYDKA-7.62-XXP-XX



NINGBO RHT ELECTRONIC CO.,LTD



RHTBYDKA-7.62-XXP-XX