
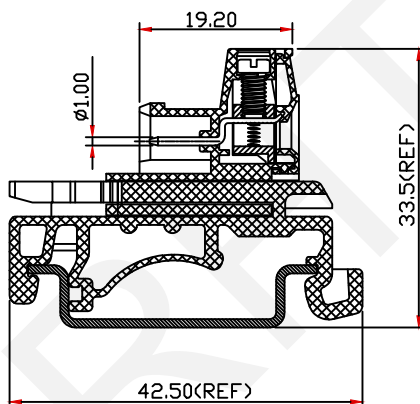
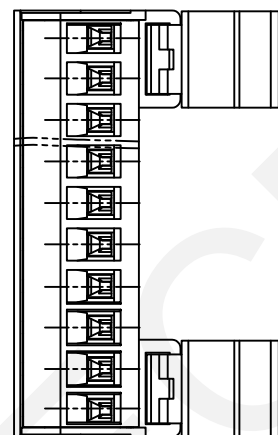
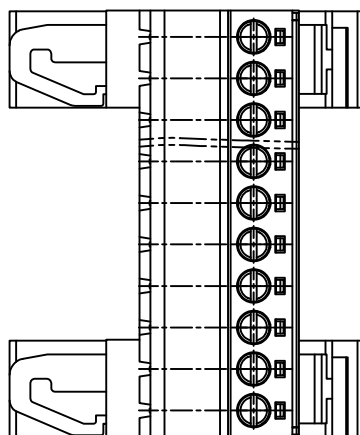


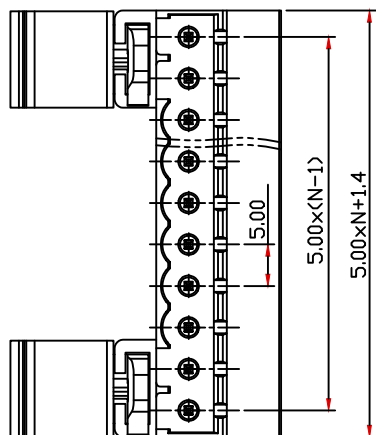

Material

Housing:PA66, UL94V-0

Screw:M3, Steel,Zn plated

Pin header:Brass, Tin plated

Cage:Brass,Ni plated

Electrical

Rated voltage: 300V

Rated current: 15A

Wire range:28~14AWG 2.5mm²

Contact Resistance: 20mΩ

Insulation resistance: 500MΩ/DC500V

Withstand voltage:AC2000V/1min

Mechanical

Temp. Range:-40°C~+105°C

Strip length:7~8 mm

Torque:0.5 Nm(4.5 Lb.in)

Order Information

RHTBYGNU-5.00-XXP-4 S XX

Terminal Block

Pitch

No. of Pole

Color:4-Green

Screw:S- Slot Screw

C-Cross Screw

Product Code: 00~99



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Pluggable Terminal Block 5.00MM

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION

RHTBYGNU-5.00-XXP-4S-00


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



1

2

3

4






5

6

7

8

9

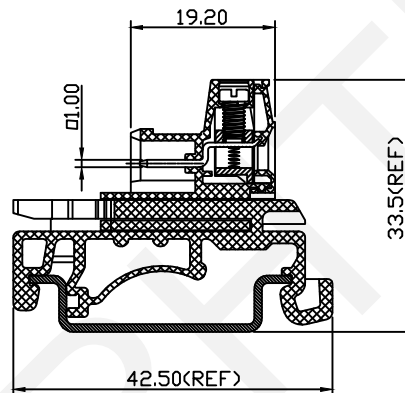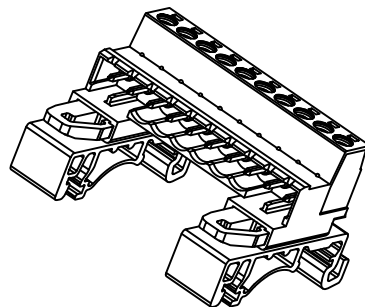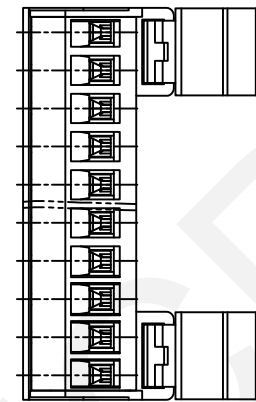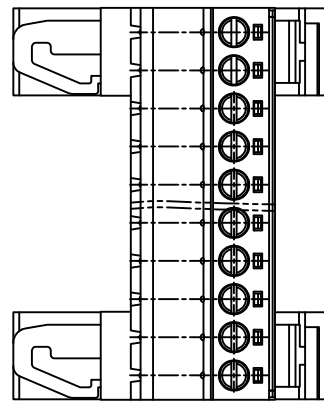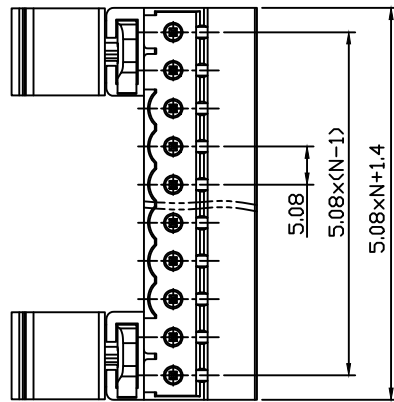

Material and other.
Housing:PA66,UL94V-0
Pin Header:Brass, Tin Plated
Cage:Brass,Ni Plated
Screw/Torque:Steel,M3,Zn Plated/0.5N.m
Contact Resistance:20mΩ Max
Insulation Resistance:500MΩ/DC500V Min
Stripping Length:7~8mm
Temp.Range:-40°C~+105°C

Order Information

RHTBYGNU-5.08-XXP-X X

Terminal Block

Pitch:5.08mm

No.of(06~24)Pins

Color:1=Gray 2=Blue 3=Black

4=Green 5=Orange 6=Red

7=Transp 8=Yellow 9=White

Screw:SC=Slot/Cross

S-Slot Screw C-Cross Screw



SC=Slot/Cross



S-Slot Screw



C-Cross Screw

Electrical Characteristics	UL	IEC
Rated Voltage	300V	450V
Rated Current	15A	20A
Withstand Voltage	AC2000/1min	---
Wire Range	28~14 AWG	2.5 mm ²

UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120
±0.12	±0.15	±0.3	±0.5
			CHK'D BY FENG
			APPR BY ZHAN

Pitch 5.08mm Terminal Block
THIRD ANGLE PROJECTION
RHTBYGNU-5.08-XXP-XX



NINGBO RHT ELECTRONIC CO.,LTD