


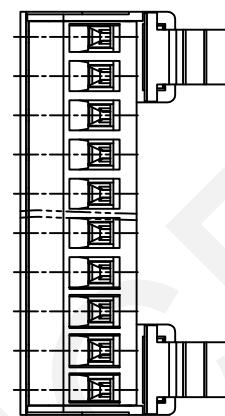
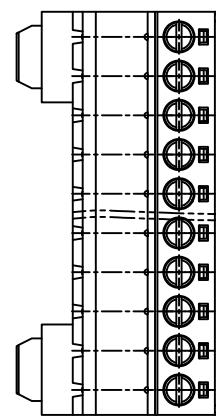


1 2 3 4 5 6 7 8 9

A

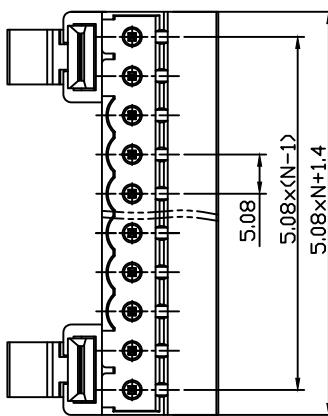

B

Material and other.

Housing:PA66,UL94V-0

Pin Header:Brass, Tin Plated

Cage:Brass,Ni Plated

Screw/Torque:Steel,M3,Zn Plated/0.5N.m

Contact Resistance:20mΩ Max

Insulation Resistance:500MΩ/DC500V Min


Stripping Length:7~8mm

Temp.Range:-40°C~+105°C

C

Order Information

RHTBYGXK-5.08-XXP-X X

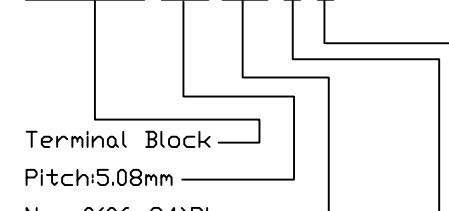

Terminal Block

Pitch:5.08mm

No.of(06~24)Pins



Color:1=Gray 2=Blue 3=Black

4=Green 5=Orange 6=Red

7=Transp 8=Yellow 9=White

Screw:SC=Slot/Cross

S-Slot Screw C-Cross Screw



SC=Slot/Cross S-Slot Screw C-Cross Screw

D

E

F

Electrical Characteristics	UL	IEC
Rated Voltage	300V	450V
Rated Current	15A	20A
Withstand Voltage	AC2000/1min	---
Wire Range	28~14 AWG	2.5 mm ²

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

Pitch 5.08mm Terminal Block

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN

THIRD ANGLE PROJECTION

RHTBYGXK-5.08-XXP-XX

G

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

G