



1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---


A

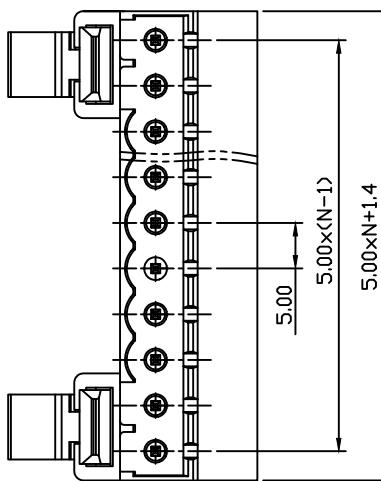


B

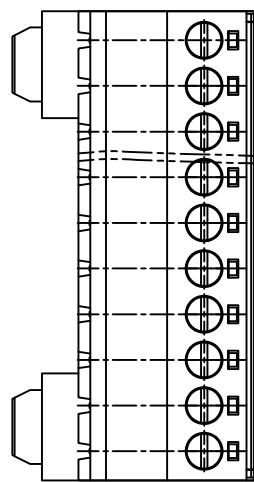

C

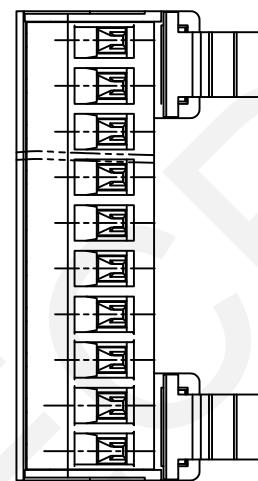

D



E

F

#### Material

Housing: PA66, UL94V-0

Screw: M3 Steel, Zn plated

Pin header: Brass, Tin plated

Cage: Brass, Ni plated

#### Electrical

Rated voltage: 300V

Rated current: 15A

Wire range: 28~14AWG 2.5mm<sup>2</sup>

Contact Resistance: 20mΩ

Insulation resistance: 500MΩ/DC500V

Withstand voltage: AC2000V/1min

#### Mechanical

Temp. Range: -40°C ~ +105°C

Strip length: 7~8 mm

Torque: 0.5 Nm(4.5 Lb.in)

#### Order Information

RHTBYGXKM-5.00-XXP-4 S XX

Terminal Block

Pitch

No. of Pole

Color: 4-Green

Screw: S-Slot Screw

C-Cross Screw

Product Code: 00~99



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN

Pluggable Terminal Block 5.00MM



RHTBYGXKM-5.00-XXP-4S-00

1

2

3

4

5

6

7

8

9

A

B

C

D


E

F


G

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---


A

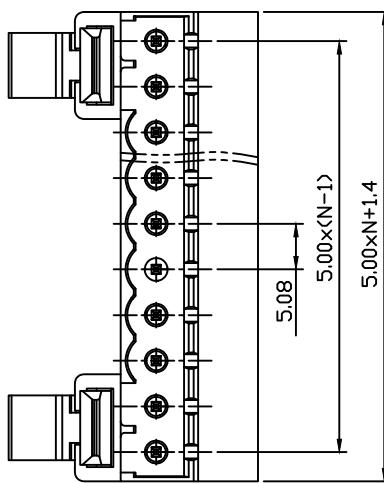


B

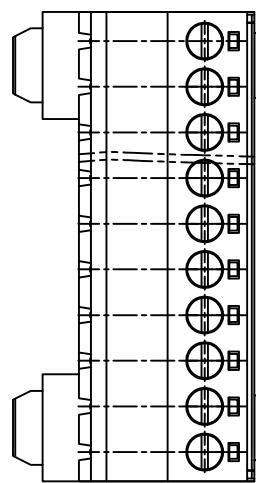

C

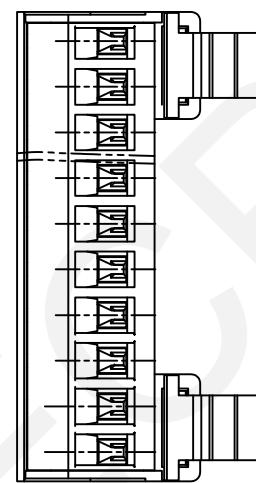

D



E

F

#### Material

Housing: PA66, UL94V-0

Screw: M3 Steel, Zn plated

Pin header: Brass, Tin plated

Cage: Brass, Ni plated

#### Electrical

Rated voltage: 300V

Rated current: 15A

Wire range: 28~14AWG 2.5mm<sup>2</sup>

Contact Resistance: 20mΩ

Insulation resistance: 500MΩ/DC500V

Withstand voltage: AC2000V/1min

#### Mechanical

Temp. Range: -40°C ~ +105°C

Strip length: 7~8 mm

Torque: 0.5 Nm (4.5 Lb.in)

#### Order Information

RHTBYGXKM-5.08-XXP-4 S XX

Terminal Block

Pitch

No. of Pole

Color: 4-Green

Screw: S-Slot Screw

C-Cross Screw

Product Code: 00~99



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	APPR BY ZHAN
±0.12	±0.15	±0.3	±0.5		

Pluggable Terminal Block 5.08MM



RHTBYGXKM-5.08-XXP-4S-00

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

G