
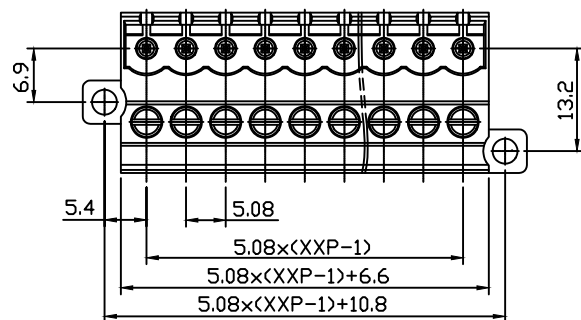

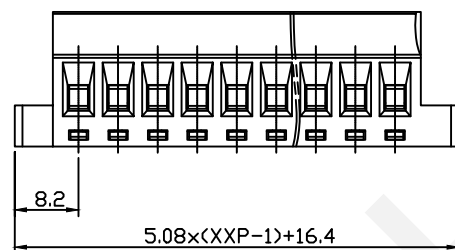



Material and other.
Housing:PA66,UL94V-0
Pin Header/Cage:Brass,Ni Plated
Screw/Torque:Steel,M3,Zn Plated/0.5N.m
Contact Resistance:20mΩ Max
Insulation Resistance:500MΩ/DC500V Min
Stripping Length:7~8mm
Temp.Range:-40°C~+105°C

Order Information

RHTBYHK-5.08-XXP-X X

Terminal Block
Pitch:5.08mm
No. of (02~24) Pins
Color:1=Gray 2=Blue 3=Black
4=Green 5=Orange 6=Red
7=Transp 8=Yellow 9=White
Screw:SC=Slot/Cross
S-Slot Screw C-Cross Screw

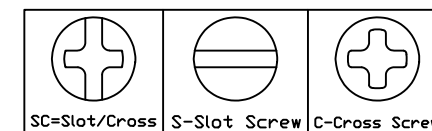

Electrical Characteristics	UL	IEC
Rated Voltage	300V	450V
Rated Current	15A	20A
Withstand Voltage	AC2000/1min	---
Wire Range	28~14 AWG	2.5 mm ²



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4		SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG
±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN

Pitch 5.08mm Terminal Block



RHTBYHK-5.08-XXP-XX