

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---

A

B

C

D

E

F

A

B






C

D

E

F

G

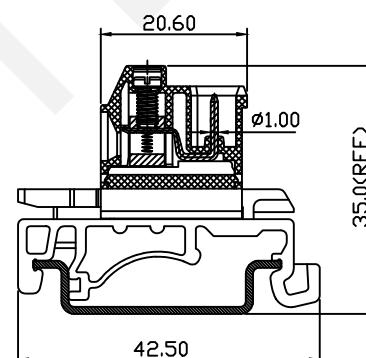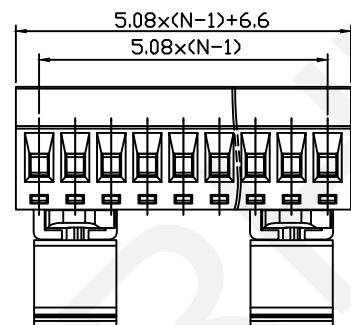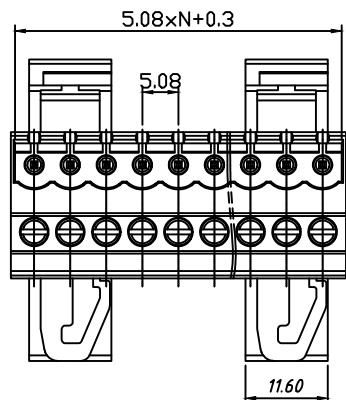

Material

Housing: PA66, UL94V-0

Screw: M3 Steel, Zn plated

Pin header: Brass, Tin plated

Clamp: Brass, Tin plated

Electrical

Rated voltage: 300V

Rated current: 15A

Wire range: 28~14AWG 2.5mm²

Contact Resistance: 20mΩ

Insulation resistance: 500MΩ/DC500V

Withstand voltage: AC2000V/1min

Mechanical

Temp. Range: -40°C~+105°C

Strip length: 7~8 mm

Torque: 0.5 Nm (4.5 Lb.in)

Order Information

RHTBYNK-5.08-XXP-4 S XX

Terminal Block

Pitch

No. of Pole

Color: 4-Green

Screw: S- Slot Screw

C-Cross Screw

Product Code: 00~99



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN
0~3	3~18	18~50	50~120	CHK'D BY FENG	APPR BY ZHAN
±0.12	±0.15	±0.3	±0.5		

Pluggable Terminal Block 5.08MM



RHTBYNK-5.08-XXP-4S

1

2

3

4

5

6

7

8

9