

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---

A

B

C

D

E

F

A

B

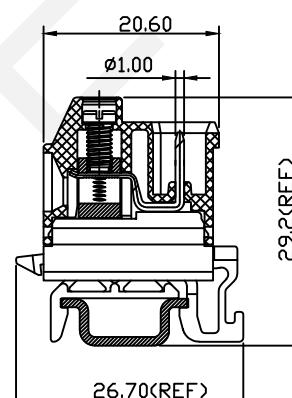
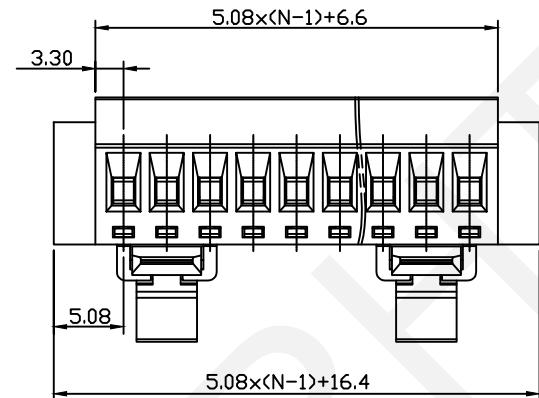
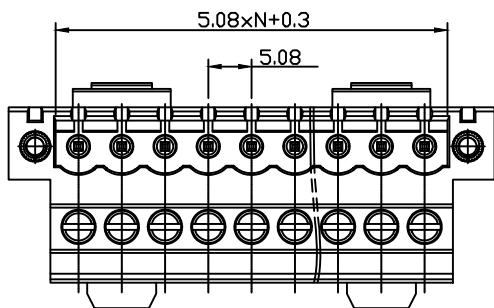
C

D

E

F

G

**Material**

Housing:PA66, UL94V-0

Screw:M3 Steel,Zn plated

Pin header:Brass, Tin plated

Cage:Brass,Tin plated

Nut:Brass

**Electrical**

Rated voltage: 300V

Rated current: 15A

Wire range:28~14AWG 2.5mm<sup>2</sup>

Contact Resistance: 20mΩ

Insulation resistance: 500MΩ/DC500V

Withstand voltage:AC2000V/1min

**Mechanical**

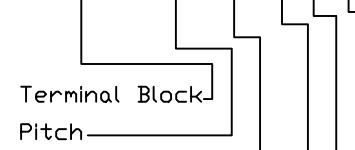
Temp. Range:-40°C~+105°C

Strip length:7~8 mm

Torque:0.5 Nm(4.5 Lb.in)

**Order Information**

RHTBYNKM-5.08-XXP-4 S XX



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12


±0.15

±0.3

±0.5

APPR BY ZHAN

Pluggable Terminal Block 5.08MM



RHTBYNKM-5.08-XXP-4S-00

1

2

3

4

5

6

7

8

9