

1 2 3 4 5 6 7 8 9

A

B

C

D

E

F

G

A

B


C

D

E

F

G

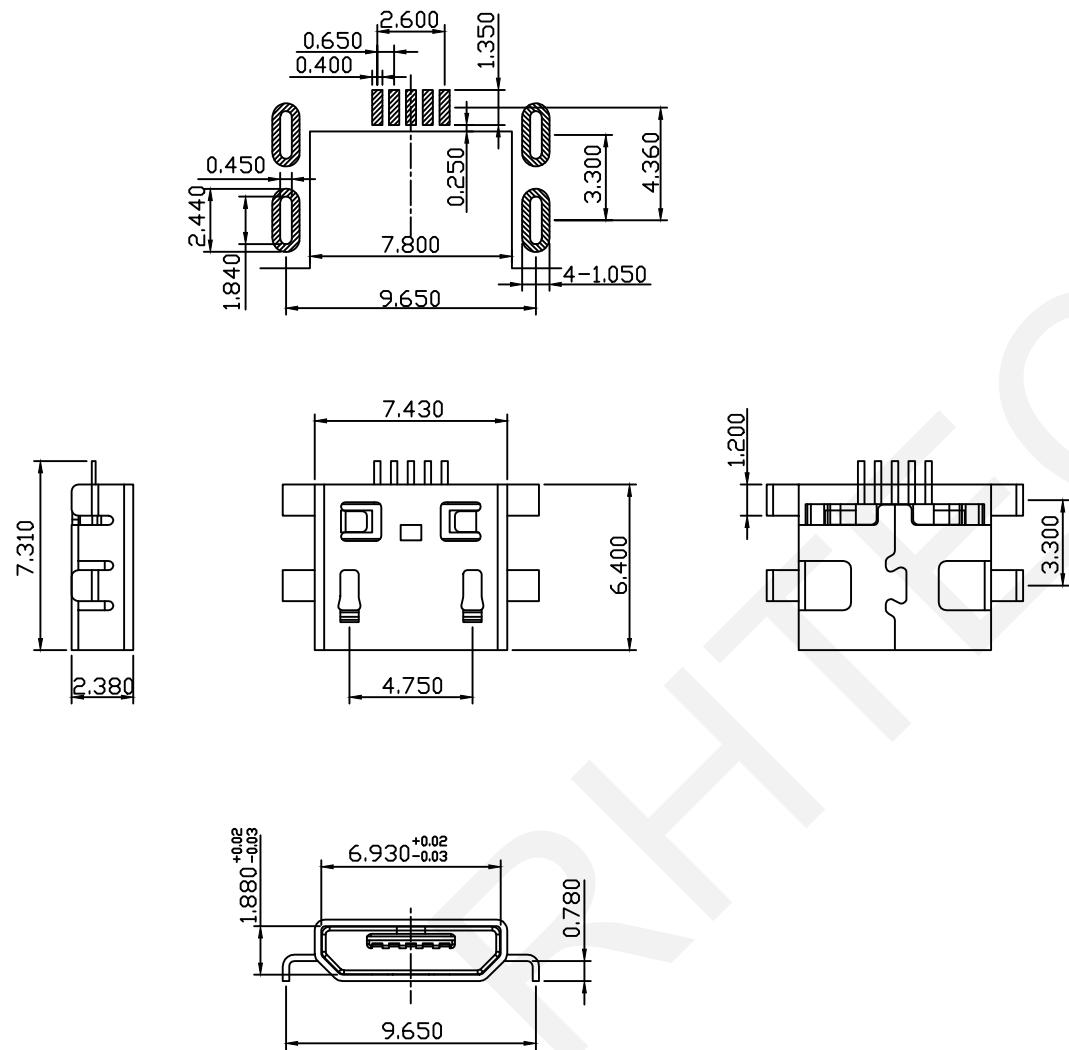

Material

Housing:LCP,UL94V-0,Black.

Contact:Copper Alloy.Gold

Contact Type: Stamped

Shielding:Stainless Steel Matt Tin Plated

Electrical:

Current Rating:1.8 A Pin1& Pin 5

1.0 A Other Pins

Voltage Rating:30V DC

Contact Resistance:30mΩ Max.

Withstanding Voltage: 100 Vac/Min.

Insulation Resistance:1000MΩ Min.

Operating Temperature:-40°C Up To +85°C

Compliance: Lead Free And Rohs

Order Information

RHTAY238-B-R

Micro USB

Color:B=Black

R-Reel Packing

 NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4			SCALE:---	DRWN BY PAN	CONN RCPT 5POS MICRO USB DIP.MID MOUNT	
0~3	3~18	18~50	50~120		CHK'D BY FENG	THIRD ANGLE PROJECTION	RHTAY238-B-R
±0.12	±0.15	±0.3	±0.5		APPR BY ZHAN		

1

2

3

4

5

6

7

8

9