


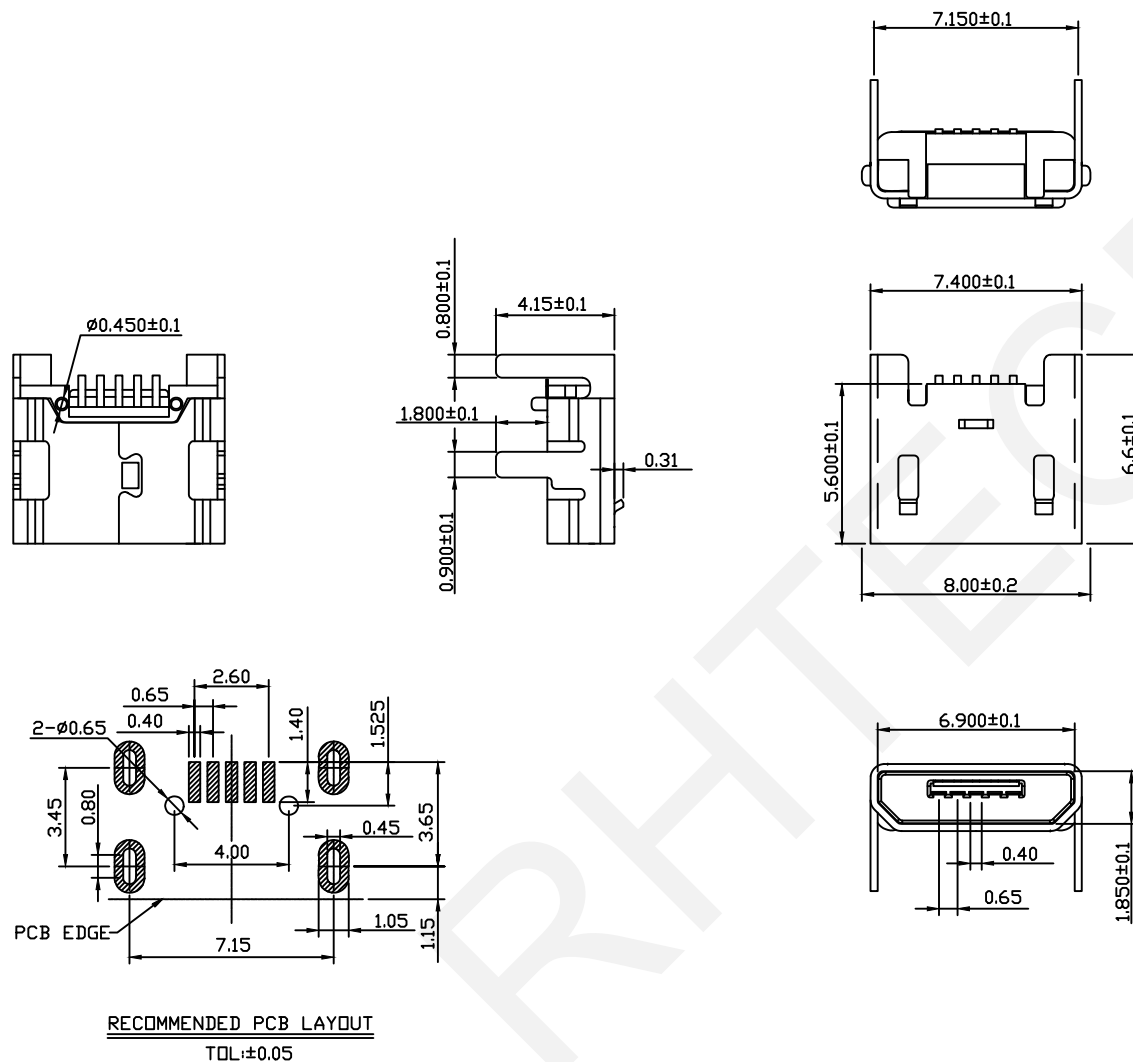

Material

Housing:High Temperature Thermoplastics

UL94V-0,LCP,Black

Contact:Copper Alloy C5191,

Shell:Copper Alloy C2680,

Finish:

Contact:Plated Gold In Mating Area,

Tin On Solder Tails.

Shell:Nickel Plating

Electrical:

Current Rating:1.0A/Contact Terminal

Voltage Rating:30V DC

Contact Resistance:50mΩ Max.

Dielectric Withstanding Voltage:

300 V AC AT Sea Level.

Insulation Resistance: 100MΩ Min.

Connector Mate and Unmated Force


Mate Force:3.0kgf Max.

Unmated Force:0.7kgf Min.

Terminal Retention:0.5kgf Min.

Order Information

RHTAY243-B-R



RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

CONN RCPT 5POS MICRO USB SMD

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAY243-B-R