

1 2 3 4 5 6 7 8 9

A

A

B

B

C

C

D

D

E

E

F

F

G

G



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

CONN MICRO USB 2P R/A DIP

0~3

3~18

18~50

50~120

CHK'D BY FENG

± 0.12

± 0.15

± 0.3

± 0.5

APPR BY ZHAN

THIRD ANGLE PROJECTION

RHTAY250-B

1

2

3

4






5

6

7

8

9

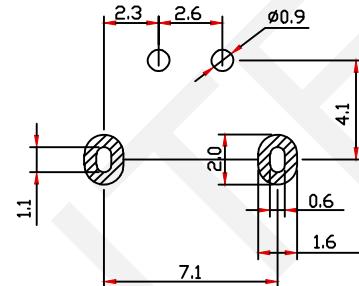

Material

Housing:Hing Temperature Thermoplastics,Black
Contact:Copper Alloy C5191,
Shell:Copper Alloy C2680/SPCC,

Finish:


Contact:Plated Gold In Mating Area,
Tin On Solder Tails.
Shell:Nickel Plating

Electrical:

Current Rating:1.5A/Contact Terminal
Voltage Rating:30V DC
Contact Resistance:30mΩ Max.
Dielectric Withstanding Voltage:
500 V AC AT Sea Level.
Insulation Resistance: 1000MΩ Min.
Connector Mate and Unmated Force
Mate Force:3.57kgf Max.
Unmated Force:1.02kgf Min.

Order Information

RHTAY250-B



Color:B=Black

CONN MICRO USB 2P R/A DIP



RHTAY250-B