



1 2 3 4 5 6 7 8 9


A

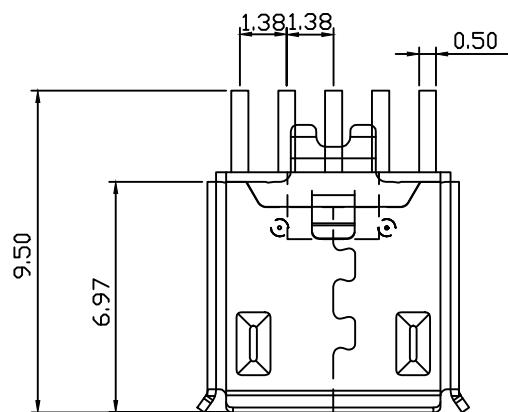


B

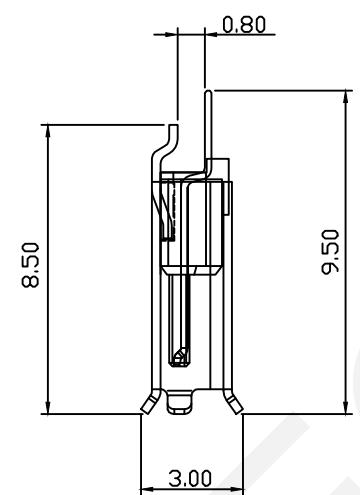


C

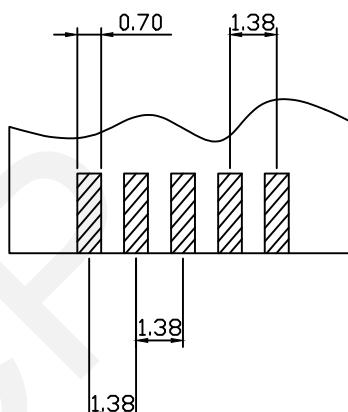


D

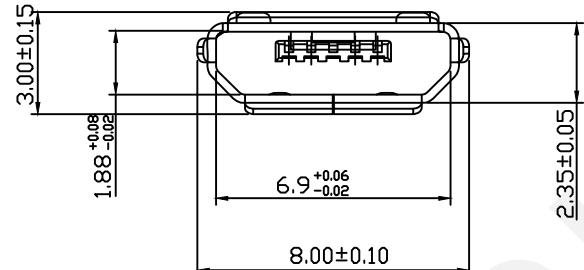

E



F



Material:

1. Insulation: Thermoplastic
2. Shell: Copper Alloy/SPCC, T=0.30mm, Plating: Nickel
3. Terminal: Copper Alloy, T=0.25mm, Plating: Gold/Tin Plated

Electrical Characteristics:

1. Insulator Resistance: 1000MΩ Min
2. Contact Resistance: 30mΩ Max
3. Withstanding Voltage: 500V AC/minute

Mechanical Characteristics:

1. Insertion Force: 3.57Kgf MAX
2. Extraction Force: 1.02Kgf MIN



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

CONN MICRO USB 5P Lip type 0.8mm  
Curling Blister packing

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN

THIRD ANGLE PROJECTION

RHTAY252

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

G