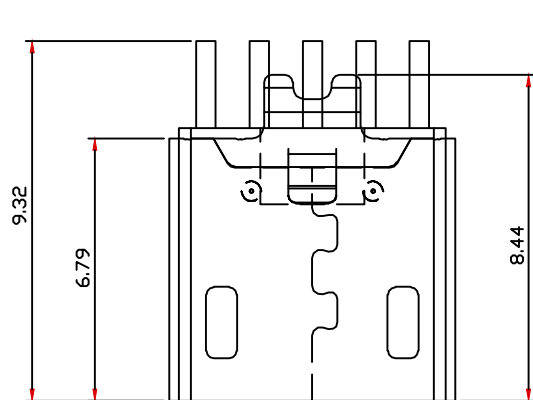


Material:
 Insulation Material Thermoplastic
 Shell: Copper Alloy/SPCC, T=0.30mm
 Plating: Nickel.
 Terminal: Copper Alloy, T=0.25mm
 Plating: Gold/Tin Plated.

Electrical: Insulation Resistance: 1000M Ω Min
 Contact Resistance: 30m Ω Max.
 Withstanding Voltage: 500 V AC

Mechanical Characteristics.
 Insertion Force: 3.5kgf Max
 Extraction Force: 1.02kgf Min

Order Information

RHTAY253-B

Micro USB

Color: B=Black



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

CONN MICRO USB 5P Clip type 1.0mm

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAY253-B