

1 2 3 4 5 6 7 8 9

A

A

B

B

C

C

D

D

E



E

F

F

G

G

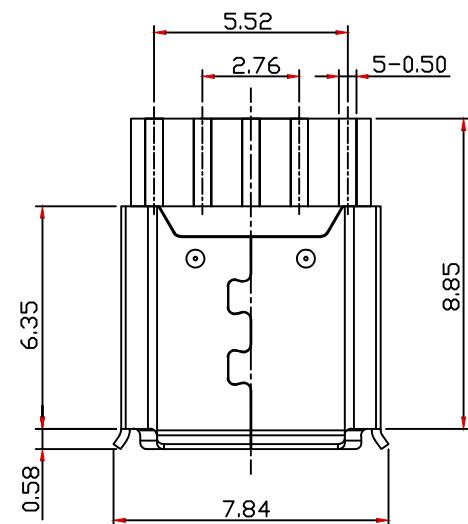

Material:


Housing:High Temperature Plastic,
UL94V-0,Black.
Contact A:Brass T=0.20mm,Au Plated.
Shell:Stainless Steel T=0.25mm,Ni Plated

Electrical:

- 1.Current Current Rating:
1.0A(Signal PIN 2 3 4);
1.8A (Power PIN 1 5)
- 2.Contact Resistance:40mΩ Max
- 3.Insulation Resistance:100MΩ Min.
- 4.Dielectric Withstanding:100V AC Min.
- 5.Durability:10000 cycles
- 6.Connector Mating forces:35N Max (3.57Kgf)
- 7.Connector Unmating force:8N Min (0.30Kgf).
- 8.Product Meet The Request of the RoHS

Order Information

RHTAY254-B



Color:B=Black

Pin Number	Signal Name
1	VBUS
2	D-
3	D+
4	ID
5	GND



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

CONN MICRO USB 5P Solder type

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN

THIRD ANGLE PROJECTION



RHTAY254-B

1

2

3

4

5

6

7

8

9