

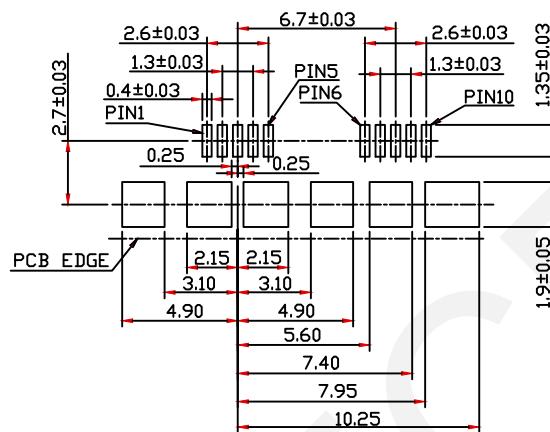
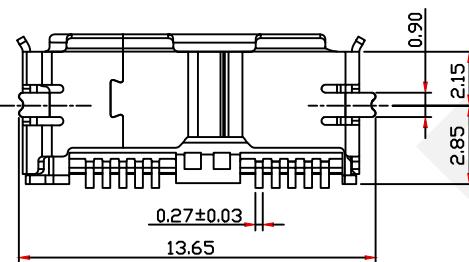
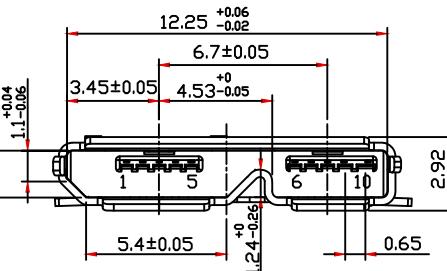


1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---

A

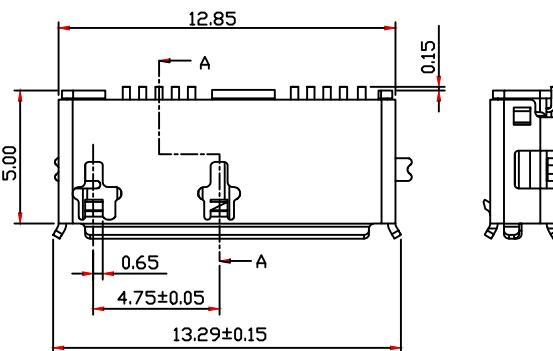

Material:
Housing:LCP,UL94V-0
Contact:Copper Alloy.
Gold Plating AT Contact Area
Tin Plating on the Tails.
Shell:SUS304.Tin Plated

Electrical:
Contact Current Rating: 1.0A Max
Contact Resistance:30mΩ Max.
Insulation Resistance: 100MΩ Min
Dielectric Withstanding Voltage:100V AC R.M.S
Operating Temperature:-30°C~+80°C.

Mechanical Characteristics:
Mating Force: 3.5kgf Max.
Unmating Force: 1.0kgf Min.
Durability:5000 Cycles

Order Information

RHTAY34-10F 1-R
Micro USB 3.0
10F:10Pin Female
Series No. _____
Packing: _____

T-Tube R-Tape on Reel

RHTECP® NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

MICRO USB 3.0 Female.10P SMD

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAY34-10F1-R

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---

A

B

C

D

E

F

G