

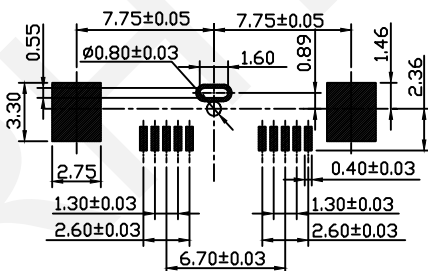
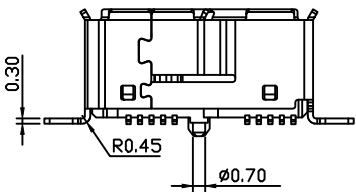
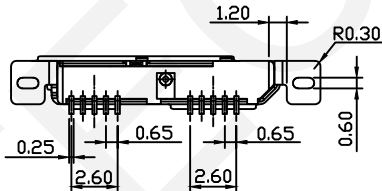

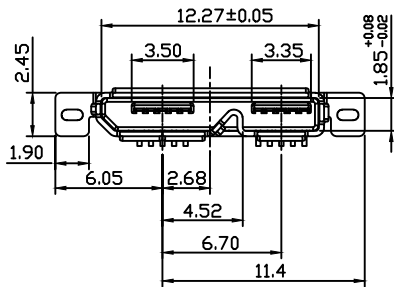
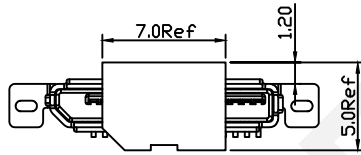



	1	2	3	4	5	6	7	8	9
A									
B									
C									
D									
E									
F									
G	 NINGBO RHT ELECTRONIC CO.,LTD			UNITS:mm	SHEET SIZE: A4	SCALE:---	DRWN BY PAN	MICRO USB 3.0 Female.10P Vertical SMD	
				0~3	3~18	18~50	50~120	CHK'D BY FENG	THIRD ANGLE PROJECTION
				±0.12	±0.15	±0.3	±0.5	APPR BY ZHAN	 RHTAY34-10F2-R
	1	2	3	4	5	6	7	8	9



RECOMMENDED PCB LAYOUT

Material:
Housing:LCP,UL94V-0
Contact:Copper Alloy.
Gold Plating AT Contact Area
Tin Plating on the Tails.
Shell:SUS304.Tin Plated

Electrical:
Contact Current Rating: 1.5A Max
Contact Resistance:30mΩ Max.
Insulation Resistance: 100MΩ Min
Dielectric Withstanding Voltage:100V AC R.M.S
Operating Temperature:-20°C~+60°C.
Mechanical Characteristics:
Mating Force: 3.5kgf Max.
Unmating Force: 1.0kgf Min.
Durability:10000 Cycles

Order Information
RHTAY34-10F 2-R
Micro USB 3.0-
10F:10Pin Female
Series No.
Packing:
T-Tube R-Tape on Reel