

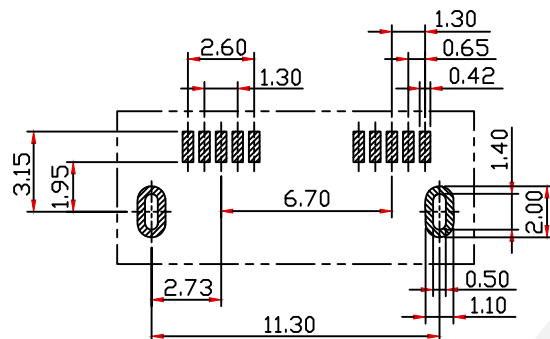
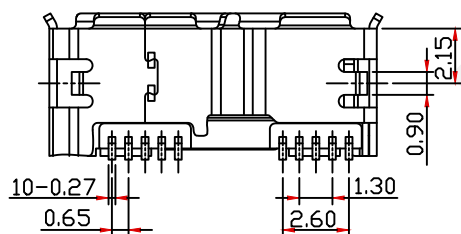
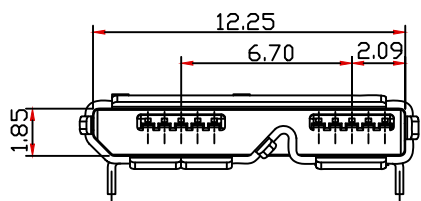
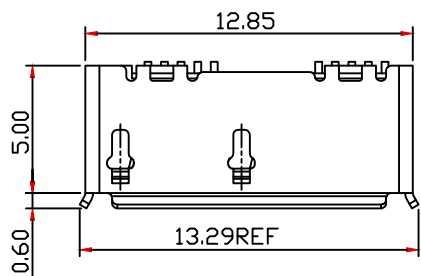


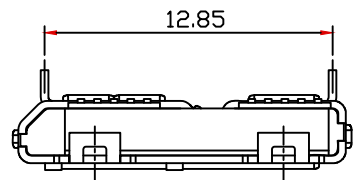

RECOMMENDED PCB LAYOUT

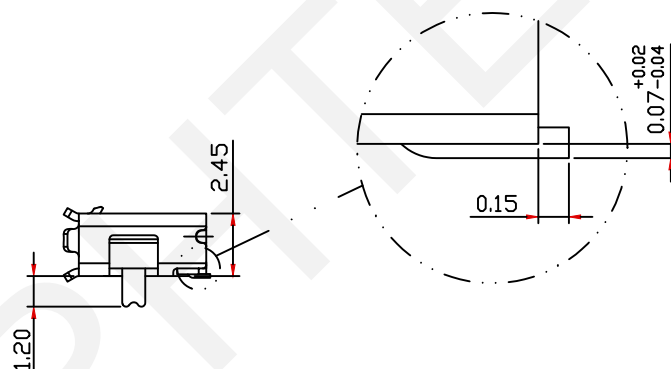

Material:

Housing: LCP, UL94V-0

Contact: Copper Alloy.

Gold Plating AT Contact Area

Tin Plating on the Tails.

Shell: SUS304, Tin Plated

Electrical:

Contact Current Rating: 1.0A Max

Contact Resistance: 30mΩ Max.

Insulation Resistance: 100MΩ Min

Dielectric Withstanding Voltage: 100V AC R.M.S

Operating Temperature: -30°C~+80°C.

Mechanical Characteristics:

Mating Force: 3.5kgf Max.

Unmating Force: 1.0kgf Min.

Durability: 5000 Cycles

Order Information

RHTAY34-10F 3-R

Micro USB 3.0

10F: 10Pin Female

Series No.

Packing:

T-Tube R-Tape on Reel

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

MICRO USB 3.0 Female.10P SMD

0~3

3~18

18~50

50~120

CHK'D BY FENG

THIRD ANGLE PROJECTION


±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAY34-10F3-R