
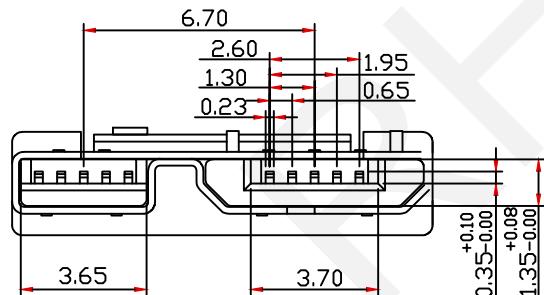
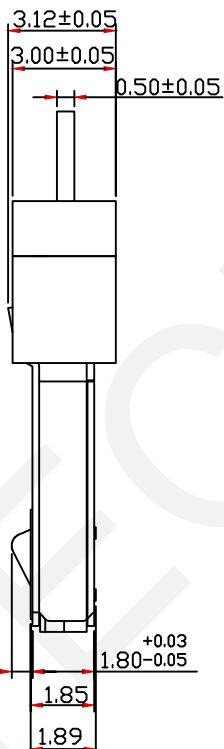


1 2 3 4 5 6 7 8 9

A

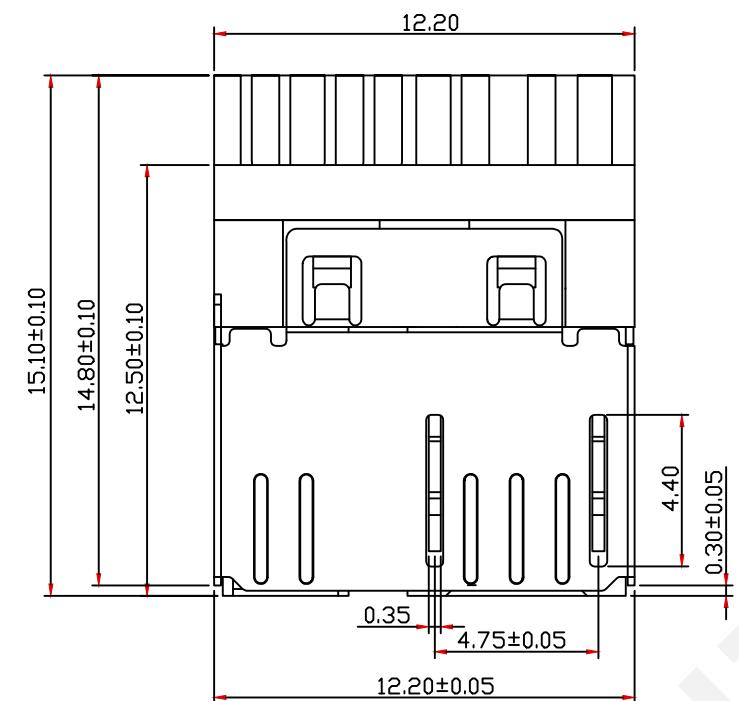

Material:

Housing: Thermoplastic, UL94V-0

Contact: Copper Alloy,

Shell: SUS201

Plating:

Contact: Gold Plating AT Contact Area

Tin Plating AT Solder Area

Nickel Under plated All Over

Shell: Solder Nickel Plated On All Over,

Electrical:

Operating Temperature: -20°C TO +80°C



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

Sheet Size: A4

Scale: ---

DRWN BY PAN

MICRO USB 3.0 PLUG,10P Solder

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAY34-10M1

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

G