
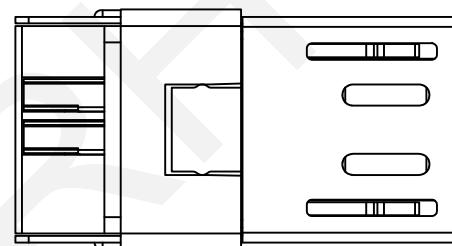
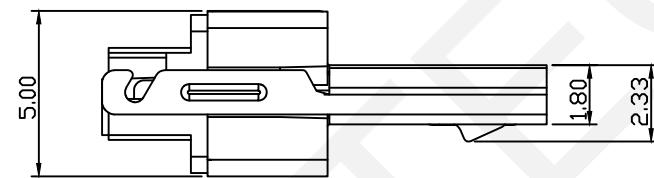

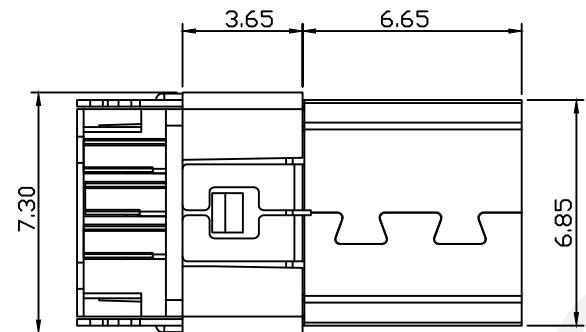


1 2 3 4 5 6 7 8 9

A

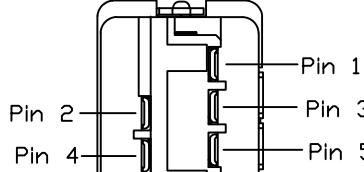

Material:

Housing:LCP+30%GF

Flammability Rating:UL94V-0 Black.

Shell:Stainless Steel.

Contacts:Brass

Contacts Plating Gold Standard:Flash.

Electrical:

Current Rating:0.5 Amp

Voltage:100 V AC/DC Max.

Dielectric Withstanding:500 V AC for one minute.

Operating Temperature:-55°C~+85°C



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

CONN PLUG MICRO USBTYPE B solder T5.0

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN

THIRD ANGLE PROJECTION

RHTAY35-0

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

G