







1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---



A



## BACK SHELL







B



C

## FRONT SHELL

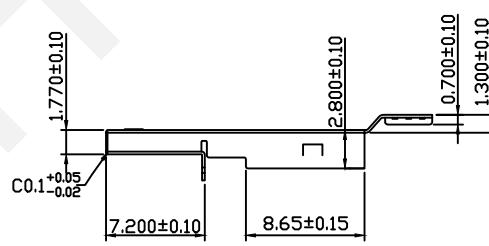

D

## Material:

Housing:LCP ,UL94V-0 Black

Contact:Phosphor Bronze,T=0.20+0.01mm

Front Shell:Stainless Steel, T=0.20+0.01mm

Back Shell:Stainless Steel, T=0.20+0.01mm

Clasp:Stainless Steel, T=0.40+0.01mm.Finishes:

Contacts: Gold flashed, on Contact area.

100u-120u" Tin Plating, on solder tails

50u-80u" Nickel,Underplating over all.

## Electrical:

Current Rating:1A Max.

Dielectric Withstanding Voltage:500 VAC far Minute.

Contact Resistance:30mΩ Max.

Insulation Resistance:1000MΩ Min at DC 500V

Temperature Range:-55°C TO +105°C

E

G



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

CONN PLUG MICRO USB TYPE B Solder

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN

THIRD ANGLE PROJECTION

RHTAY35-3

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

G