

1 2 3 4 5 6 7 8 9

A

B

C

D

E

F

A

B







C

D

E

F

G

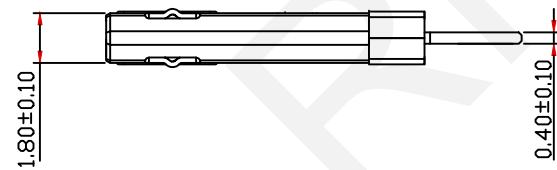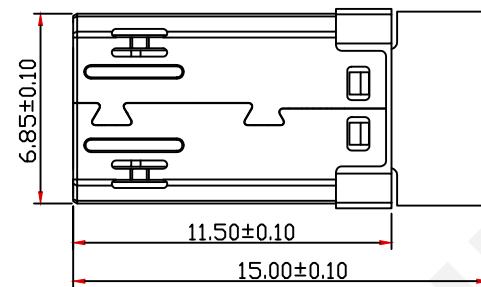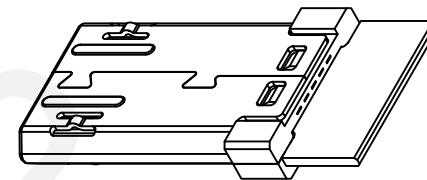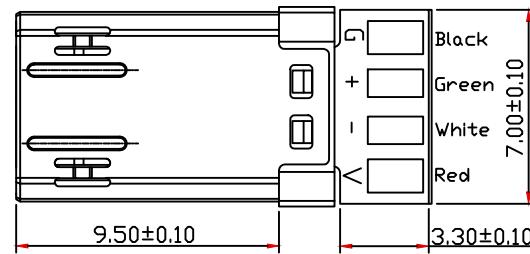

Material:

Housing:LCP E130,UL94V-0 Black

Contact:Brass 5210

Shell:Stainless Steel,T=0.20±0.03mm

Plating:

Contact:Plated Gold Flash For Contact Area.

Shell:Nickel Over All (salt spray for 24H).

Shell:Gold Over All (salt spray for 24H)

Electrical:

Operating Temperature:-20°C To +80°C

Product Compliant to the request RoHS



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

CONN PLUG MICRO USB Solder

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN



RHTAY35-5

1

2

3

4

5

6

7

8

9