
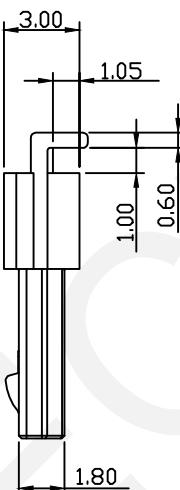
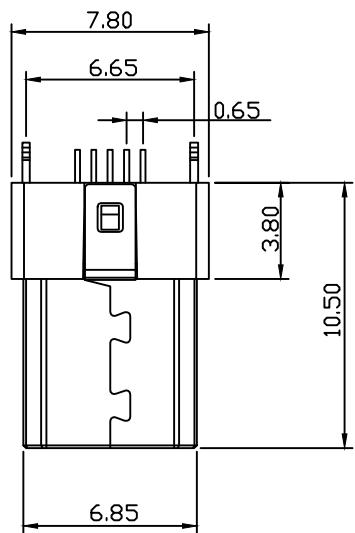


1 2 3 4 5 6 7 8 9

A



Material

Housing:Hing Temperature Thermoplastics

UL94V-0 LCP,Black.

Contact:C2680/C5191.

Shell:Copper/iron/stainless steel.

Finish:Contact:Plated Gold In Mating Area,

Tin Lead On Solder Talls

Shell: Tin Lead Plating

Electrical:Contact Resistance:30mΩ Max.

Dielectric Withstanding Voltage:

50 V AC AT Sea Level

Insulation Resistance:100MΩ Min.

Order Information

RHTAY36-5M3-B-R

Micro USB

Serial Number

Color:L=Blue

R-Reel packing



NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm

SHEET SIZE: A4

SCALE:---

DRWN BY PAN

CONN PLUG MICRO USB TYPE B SMD

0~3

3~18

18~50

50~120

CHK'D BY FENG

±0.12

±0.15

±0.3

±0.5

APPR BY ZHAN

THIRD ANGLE PROJECTION

RHTAY36-5M3-B-R

1

2

3

4

5

6

7

8

9

A

B

C

D

E

F

G