




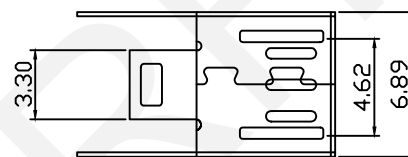
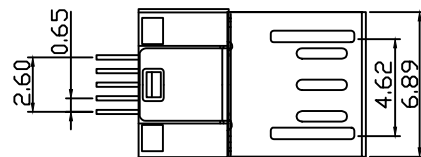


Material
Housing: High Temperature Thermoplastic
with g.f, UL94V-0.
Contact: Copper Alloy, $t=0.20\text{mm}$
Shell: SUS, $t=0.20\text{mm}$.



Electrical:
Current Rating: 1A Max.
Dielectric Withstanding Voltage:
100 V AC for 1 min.
Contact Resistance: $50\text{m}\Omega$ Max
Insulation Resistance: $100\text{M}\Omega$ Min.
Total Mating Force: 3.57 kgf Max.
Total Unmating Force: 1.0 kgf Min.
Temperature Range: -30°C Up To $+80^\circ\text{C}$

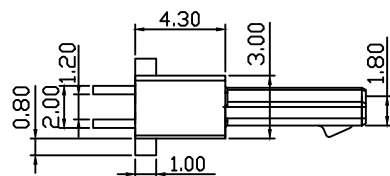

RHTECP NINGBO RHT ELECTRONIC CO.,LTD

UNITS:mm	SHEET SIZE: A4	SCALE:---
0~3	3~18	18~50
50~120		
±0.12	±0.15	±0.3
		±0.5

DRWN BY PAN
CHK'D BY FENG
APPR BY ZHAN

CONN PLUG MICRO USB TYPE B CLIP L6.8

THIRD ANGLE PROJECTION



RHTAY36-5M6-B